




## LIGHTWEIGHT DATA RECORDER (LDR)

Maximize recording capabilities with data and video recording with web browser access

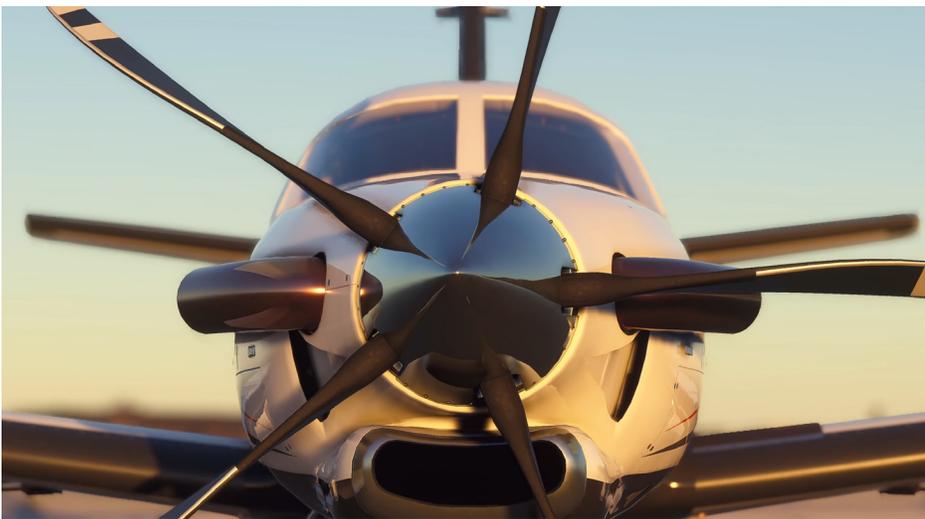

The L3Harris Lightweight Data Recorder (LDR) is a small, lightweight package providing crash-protected recording of audio, image and flight data for General Aviation (GA) fixed wing aircraft. Any subset of the total LDR capability can be utilized for any particular installation not intended for regulatory-mandated applications. While some installations may make use of only the audio and image recording capability, others may want to exploit the full audio, image, data (ARINC 717 or ARINC 429) and GPS recording.

A built-in web server makes it easy for data retrieval and configuration with just a laptop and web-browser. No expensive software or complicated cabling is required for data downloads directly on the aircraft.



### KEY FEATURES

- > ED-155 Compliant
- > FAA TSO-C197 & EASA ETSO-2C197 certified
- > Meets EASA SIB 2019-15R1 for in-flight recording for light aircraft
- > Crash-Survivable Memory Unit (CSMU)
- > Built-in web server – retrieve recorded data with just a laptop and web browser
- > Optional internal/external GPS receiver
- > Up to four channels of audio, including Cockpit Area Microphone (CAM)
- > Provisions for analog camera as video source
- > Status monitoring and fault logging
- > Optional ARINC 429 recording
- > Industry standard file types (audio, data, video)

### OPTIONS

- > GPS receiver supported – internal and external
- > Video Input for analog cameras
- > ARINC 429 recording

**DISCOVER MORE:**

[www.L3Harris.com/avionics](http://www.L3Harris.com/avionics)

# SPECIFICATIONS

LDR						
<b>Physical</b>						
Height:	4.9 in. (12.45 cm)					
Width:	3.9 in. (9.9 cm)					
Depth:	8.0 in. (20.3 cm)					
Weight:	< 5 lbs. (2.27 kg)					
Reliability:	10,000 hrs.					
<b>Power</b>						
Requirements:	28 VDC					
Consumption:	< 5 W (without external microphone and camera)					
<b>Connectors</b>						
Coaxial BNC:	NTSC analog video (on certain LDR models)					
Coaxial TNC:	GPS RF antenna (on certain LDR models)					
D-Sub 50-Pin:	Analog audio, control inputs, status outputs, ARINC 717 serial data, ARINC 429 serial data on certain LDR models, external GPS serial data					
RJ-45:	100 Base-T Ethernet					
<b>Environmental</b>						
Temperature:	Operating: -55° C to +70° C / Non-operating: -55° C to +85° C					
Altitude:	Operating: 0 to 55,000 ft.					
Vibration:	DO-160F Cat. S, curve M					
Penetration:	250 lbs. @ 10.25 feet probe					
Static Crush:	5,000 lbs.					
Fire Protection:	1100° C for 15 min. and 260° C for 5 hrs.					
Impact:	1,000 G over 6-axis					
<b>Options</b>						
Microphone:	Panel and surface-mount microphones available					
Video:	NTSC Input for optional camera (PAL available)					
GPS:	External GPS antenna (L1 Active) with TNC connector P/N 009-E5557-00					
Compliance:	ED-155 (full details available upon request) FAA TSO-C197					
<b>Company Certification</b>						
ISO 9001:2008 and AS9100:2009 Rev. C Certified						
<b>Recording</b>	<b>GPS Recording</b>		<b>ARINC 717</b>	<b>ARINC 429</b>	<b>Audio</b>	<b>Video</b>
	25 hours		25 hours	25 hours	2 hours	2 hours
<b>Part Number</b>	<b>External RS232 GPS Compatible</b>	<b>Internal GPS w/ External GPS Antenna</b>	<b>Up to 512 wps</b>	<b>Up to 6100 msg/sec</b>	<b>16-bit @ 48 kbps</b>	<b>5 frames/sec</b>
1000-1710-00	X	X	X	Up to 3 buses	4 Channels	NTSC Analog
1000-1210-00	X		X	Up to 3 buses	4 Channels	
1000-1000-00	X		X		2 Channels	

## LDR

© 2020 L3Harris Technologies, Inc. | 07/2020

This document consists of basic marketing information that is not defined as technical data under EAR Part 772. L3Harris Technologies is an agile global aerospace and defense technology innovator, delivering end-to-end solutions that meet customers' mission-critical needs. The company provides advanced defense and commercial technologies across air, land, sea, space and cyber domains.



**L3HARRIS™**  
FAST. FORWARD.

1025 W. NASA Boulevard  
Melbourne, FL 32919  
t (800) 253-9525 | (616) 949-6600  
www.L3Harris.com/avionics