



L3HARRIS™
FAST. FORWARD.

P25 PORTABLE AND **MOBILE RADIO**

Mission-Critical Communications



MORE WAYS, MORE PLACES TO CONNECT



On the frontlines of an emergency, the ability for First Responders to communicate with teammates and partners on a reliable, secure network is important. That's why we developed the industry's first converged Land Mobile Radios (LMR) with LTE. We've also expanded our P25 portfolio to include a range of capabilities providing more ways to keep you connected.

Secure. Reliable. Proven Interoperability.

These are the hallmarks of L3Harris P25 portables and mobiles. Open standards-based and software-defined, our solutions give

you more choices of networks, proven interoperability and a flexible migration path to P25 and broadband. They are future-ready investments, with capabilities that keep pace with your agency's changing needs and tightening budgets.

- > XL FAMILY of converged LTE LMR portables
- > Intrinsically safe configurations for operations in hazardous environments
- > Multimode, digital, analog and P25 Phase 1 and 2 capabilities



L3Harris is dedicated to strong collaborations with Public Safety agencies and utilities around the world. These insights fuel our mission to develop the best P25 solutions available.

Our attention to detail can be felt and heard on each of our radios. L3Harris P25 solutions provide loud and clear audio—free from distortion even in noisy environments.

Ruggedized for top performance in harsh environments, our compact, lightweight solutions are ergonomically designed

for gloved-hand operation. Simplified user interfaces make navigation and fast switching to priority talk groups easier.

- > Rugged construction to meet intrinsically safe and multiple MIL-SPEC standards for immersion and flammability
- > Industry-leading options for advanced connectivity through LTE, Bluetooth®, Wi-Fi®, GPS and BeOn®
- > Loud, clear audio pierces through noisy environments
- > Compact, lightweight with long-life battery
- > Multiple encryption options to keep communications secure

CONVERGED LTE LAND MOBILE RADIOS

Trust When it Matters Most

The powerful and rugged L3Harris XL FAMILY of portables merges crystal clear audio with voice and data over nationwide broadband networks to improve Situational Awareness. The XL FAMILY also includes configurations meeting Underwriter Laboratories' (UL) Class 1, Division 1 (C1D1) certification for intrinsically safe operations in potentially explosive environments.



Available colors



Available colors

SPECIFICATIONS

FEATURES

XL-200P

XL-200Pi

Frequency Band (MHz)	Full-spectrum Multiband VHF, UHF-H, 700/800, LTE option	Full-spectrum Multiband VHF, UHF-H, 700/800
Operating Modes	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)
Rated RF Power (W)	3.0 - 6.0	3.0 - 6.0
Channel Spacing (kHz) WB/NB¹	25/12.5	25/12.5
Dimensions (H x W x D in)²	5.8 x 2.3 x 1.4	5.8 x 2.3 x 1.6
Approximate Weight (oz) with antenna and battery	16.2	17.9
Battery Life (5/5/90)	Up to 10 hours	10 hrs
Display	16-bit Color Transflective LCD (w/Backlight LED)	16-bit Color Transflective LCD (w/Backlight LED)
Keypad	Full or Limited	Full or Limited
Channel/Zone Switch	A/B/C/D	A/B/C/D
Channel/Talkgroup /Capacity	12,500 Standard	12,500 Standard
Durability Rating (MIL-STD-810G)	Immersible 2 m (4 hrs) IP-68	Immersible 2 m (4 hrs) IP-68
Encryption	ARC4, Single-key AES/DES, Multi-key AES/DES	ARC4, Single-key AES/DES, Multi-key AES/DES
P25 Over-the-Air-Rekeying (OTAR)	Optional	Optional
Over-the-Air-Programming (OTAP)	Optional	Optional
Wi-Fi Capability	Standard	Standard
GPS Capability	Standard	Standard
Bluetooth Functionality	Standard	Standard
Instant Recall	Standard	Standard
Active Noise Cancellation	Standard	Standard
Man Down	Optional w/Accessories	Optional w/Accessories
Lone Worker	Optional w/Accessories	Optional w/Accessories
Voice Annunciation	Standard	Standard
Intrinsically Safe	No	Yes

¹ WB/NB designates Wideband and Narrowband. ² Dimensions include the battery and excludes the measurement of the knobs and antenna.



Available colors

Available colors

Available colors

XL-185P		XL-185Pi	XL-150P
Single-band VHF, UHF-H, 700/800 or 900, LTE option		Single-band VHF, UHF-H, 700/800	Single-band VHF, UHF-H, 700/800 or 900, LTE option
Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)			Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)
3.0 - 6.0			3.0 - 6.0
25/12.5			25/12.5
5.8 x 2.3 x 1.4	5.8 x 2.3 x 1.6		5.8 x 2.3 x 1.6
16.2	17.9		17.9
10 hrs			10 hrs
16-bit Color Transflective LCD (w/Backlight LED)			16-bit Color Transflective LCD (w/Backlight LED)
Full or Limited			Full
A/B/C/D			A/B/C/D
12,500 Standard			12,500 Standard
Immersible 2 m (4 hrs) IP-68			Immersible 2 m (4 hrs) IP-68
ARC4, Single-key AES/DES, Multi-key AES/DES			ARC4, Single-key AES/DES
Optional			Optional
Optional			N/A
Standard			Standard
Standard			Standard
Standard			Standard
Standard			Standard
Standard			Standard
Optional w/Accessories			Optional w/Accessories
Optional w/Accessories			Optional w/Accessories
Standard			Standard
No	Yes		No

SINGLE-BAND PORTABLE RADIOS

Tough Streets. Tough Radios.

Our single-band portables deliver clear, distortion free audio and proven interoperability. They're equipped with Man Down and Lone Worker technologies to help enhance worker safety. Communications are secured through single and multi-key AES/DES encryption.



Available colors



		TP9400	TP9400 INTRINSICALLY SAFE	TP9600
SPECIFICATIONS	Frequency Band (MHz)	Single-band VHF, UHF-L, UHF-H, 700/800	Single-band VHF, UHF-L, UHF-H, 700/800	Single-band VHF, UHF-L, UHF-H, 700/800
	Operating Modes	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)
	Rated RF Power (W)	3.0 - 5.0	3.0 - 5.0	3.0 - 5.0
	Channel Spacing (kHz) WB/NB ¹	25/20/12.5	25/20/12.5	30/25/20/15/12.5/6.25
	Dimensions (H x W x D in) with standard battery	5.4 x 2.6 x 1.6	5.4 x 2.6 x 1.8	5.7 x 2.6 x 1.8
	Dimensions (H x W x D in) with high-capacity battery	5.4 x 2.6 x 1.8	—	5.7 x 2.6 x 2.0
	Approximate Weight (oz) with standard battery and antenna	12.1	15.2	11.8 oz - no antenna
	Approximate Weight (oz) with high-capacity battery and antenna	13.8	—	13.5 - no antenna
	Battery Life (5/5/90)	Up to 16 hours	Up to 15 hours	Up to 18 hours
	Display	32.2 x 15.1 mm monochrome	32.2 x 15.1 mm monochrome	35.3 x 26.5 mm color
	Keypad	Full/Limited	Full	Full/Limited
	Channel/Zone Switch	A/B/C	A/B/C	A/B/C
	Channel/Talkgroup/Capacity	1,000 Channels Standard (2,000 Opt.)/ 1,000 Talkgroups Standard (2,000 Opt.)/ 50 Zones Standard (100 Opt.)	1,000 Channels Standard (2,000 Opt.)/ 1,000 Talkgroups Standard (2,000 Opt.)/ 50 Zones Standard (100 Opt.)	1,000 Channels Standard (2,000 Opt.)/ 1,000 Talkgroups Standard (2,000 Opt.)/ 50 Zones Standard (100 Opt.)
	Durability Rating (MIL-STD-810G)	IP-68 Immersible 2 m (30 mins)/1 m (2 hrs)	IP-67 Immersible 1 m (30 mins)	IP-68 Immersible 2 m (30 mins)/1 m (2 hrs)
	Encryption	ARC4, Single-key AES/DES, Multi-key AES/DES	ARC4, Single-key AES/DES, Multi-key AES/DES	ARC4, Single-key AES/DES, Multi-key AES/DES
FEATURES	P25 Over-the-Air-Rekeying (OTAR)	Optional	Optional	Optional
	Over-the-Air-Programming (OTAP)	Optional	Optional	Optional
	Wi-Fi Capability	—	—	OTAP
	GPS Capability	Standard	Standard	Standard
	Bluetooth Functionality	Optional	—	Optional
	Instant Recall	—	—	—
	Active Noise Cancellation	—	—	Standard
	Man Down	Standard	Standard	Standard
	Lone Worker	Standard	Standard	Standard
	Voice Annunciation	Standard	Standard	Standard

¹WB/NB designates Wideband and Narrowband.



Available colors

XG-15P	XG-25P	XG-75P / XG-75Pe
Single-band VHF, UHF-H, 700/800	Single-band VHF, UHF-L, 700/800	Single-band VHF, UHF-L / UHF-H, 700/800
Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)
3.0 - 5.0	3.0 - 5.0	5.0 - 6.0 / 3.0 - 6.0
25/12.5	25/12.5	25/12.5
5.4 x 2.4 x 1.7	5.9 x 2.4 x 1.9	5.9 x 2.4 x 1.9
—	5.9 x 2.4 x 1.9	5.9 x 2.4 x 1.9
13.8	15.0 - 18.8	14.4 - 18.3
—	—	—
Up to 10 hours	Up to 16 hours	Up to 16 hours
Dot Matrix LCD	Dot Matrix LCD	Dot Matrix LCD
Full	Full or Limited	Full or Limited
—	—	A/B / A/B/C
512 Standard	512 Standard/1,024 Optional	1,024 Standard
IP-54 Dust-protected/Splashing Water	IP-66 Dust-tight/Powerful Water Jets	IP-68 Immersible 2 m (4 hrs)
ARC 4, Single-key AES/DES	ARC4, Single-key AES/DES, Multi-key AES/DES	ARC4, Single-key AES/DES, Multi-key AES/DES
—	Optional	Optional
Optional	Optional	Optional
—	—	—
Optional w/Accessories	Optional w/Accessories	Optional w/Accessories
Optional w/Accessories	Optional w/Accessories	Optional w/Accessories
Standard	Standard	Standard
—	—	Standard
Optional w/Accessories	Optional w/Accessories	Optional w/Accessories
Optional w/Accessories	Optional w/Accessories	Optional w/Accessories
Standard	Standard	Standard



MOBILE RADIOS

Experience the Power of Connectivity

L3Harris longevity and expertise in tactical communications technology is unmatched. We leverage this, along with First Responder insights, to engineer mobile radios delivering rugged, reliable performance for Public Safety and Utilities.



TM9400 DASH MOUNT WITH KEYPAD AND MICROPHONE



XG-25M FRONT MOUNT WITH CH-25 CONTROL HEAD UNIT

		TM9400	XG-25M
SPECIFICATIONS	Frequency Band (MHz)	Single-band VHF, UHF, 700/800, LTE option	Single-band VHF, UHF, 700/800
	Operating Modes	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1&2)	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)
	Rated RF Power (W)	VHF: 50, UHF: 40, 700/800: 30/35	VHF: 50, UHF: 50, 700/800: 30/35
	Channel Spacing (kHz) WB/NB ¹	25/20/12.5	25/12.5
	Dash Mount Dimensions (H x W x D in)	25 W: 2.1 x 6.3 x 6.9 30/35/50 W: 2.1 x 6.3 x 7.7	2.8 x 7.2 x 7.9
	Approximate Weight ²	25 W: 3.3 lbs 30/35/50 W: 3.8 lbs	5.9 lbs
	Channel/Talkgroup Capacity	1,000 Channels Standard (2,000 Opt.)/ 1,000 Talkgroups Standard (2,000 Opt.)/ 50 Zones Standard (100 Opt.)	512 Standard/1,024 Optional
FEATURES	Encryption	ARC4, Single-key AES/DES, Multi-key AES/DES	ARC4, Single-key AES/DES, Multi-key AES/DES
	P25 Over-the-Air-Rekeying (OTAR)	Optional	Optional
	Over-the-Air-Programming (OTAP)	Optional	Optional
	Mounting Kit Options	Front, Remote, Desktop	Front, Remote
	Control Head Options	Fixed Head, Remote Head and Handheld Control Head	Fixed Head and Remote Head
	Durability Rating (MIL-STD-810G)	Dust-protected/Splashing Water: IP-54	Dust-protected/Splashing Water: IP-54
	GPS Capability	Optional (Accessory Required)	Optional
	Bluetooth® Functionality	—	Optional
	Lone Worker	Standard	—
	Annunciation	Standard	Standard
	Active Noise Cancellation	—	—
	Speaker	4 W Internal/10 W External	4 W Internal/15 W External
	Adjustable Backlighting	Standard	Standard

¹WB/NB designates Wideband and Narrowband. ²Approximate weight without the mounting bracket.



**XG-75M FRONT MOUNT WITH
CH-721 FULL KEYPAD CONTROL UNIT**



**XG-100M FRONT MOUNT WITH
CH-100 TOUCHSCREEN CONTROL UNIT**



**XL-185M AND XL-200M
FRONT MOUNT WITH MICROPHONE**



XG-75M	UNITY® XG-100M	XL-185M AND XL-200M	
Single-band VHF, UHF-L, UHF-H, 700/800	Multiband VHF-L, VHF, UHF, 700/800	XL-185M Single-band VHF-L, VHF, UHF, 700/800 or 900, LTE option	XL-200M Multiband VHF-L, VHF, UHF, 700/800 and 900, LTE option
Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)	Analog Conventional, P25 Conventional, P25 Trunking (Phase 1 & 2)	
VHF: 50/110, UHF: 50, 700/800: 30	VHF-L: 100, VHF: 50, UHF: 50, 700/800: 30/35	VHF-L: 100, VHF: 50, UHF: 50, 700/800: 30/35, 900: 35	
25/12.5	25/20/12.5	25/12.5	
VHF Radio Only (110W): 2.4 x 6.9 x 11.0 VHF Radio Only (50 W): 2.0 x 6.9 x 9.2 UHF + 700/800 Radio Only: 2.0 x 6.9 x 9.2	Front-Mount Radio with CH-100: 3.3 x 7.0 x 11.6 Front-Mount Radio with CH-721: 2.4 x 6.9 x 12.8	2.4 x 6.9 x 12.8	
Remote Mount: 7.6 lbs Front Mount: 5.9 lbs Remote Mount (Transceiver only): 5.3 lbs Control Head: 1.3 lbs	Front-Mount Radio with CH-100: 6.5 lbs Front-Mount Radio with CH-721: 5.9 lbs Remote Mount Radio: 5.3 lbs	7 lbs	
1,024 Standard	CH-100: 12,500 (1,250 per mission plan) CH-721: 1,250	12,500 (1,250 per mission plan)	
ARC4, Single-key AES/DES, Multi-key AES/DES	ARC4, Single-key AES, Multi-key AES/DES	ARC4, Single-key AES/DES, Multi-key AES/DES	
Optional	Optional	Optional	
Optional	Optional	Optional	
Front, Remote, Motorcycle, Desktop	Front, Remote, Motorcycle, Desktop	Front, Remote, Motorcycle, Desktop	
Fixed, Remote and Handheld Controller	Fixed, Remote and Handheld Controller	Fixed, Remote	
CH-721 control units meet IP-65/ MIL-STD-810, XG-75M radio unit (MRU) meets IP-55	CH-100 and CH-721 control units meet IP-65/ MIL-STD-810, XG-100M radio unit meets IP-55	Control Head meets IP-65, Radio body meets IP-54 /MIL-STD-810	
Optional	Standard	Standard	
—	Standard	Standard	
—	—	Future	
Standard	Standard	Future	
—	Standard (with CH-100)	Standard	
15 W External	15 W External	3 watt internal Control Head speaker, 15 watt external	
Standard	Standard (with CH-100)	Standard	

P25 MOBILE RADIO ACCESSORIES

Customize Your Connections

We offer a complete line of accessories, allowing you to customize your radio to your unique mission needs. Our solutions are engineered, tested and proven for the rugged, consistent performance First Responders rely on.




HANDHELD CONTROL HEAD	AUDIO	CONTROL HEADS	ANTENNAS
<ul style="list-style-type: none"> > Ruggedized > Compact design > 3-line 12-character alphanumeric display 	<ul style="list-style-type: none"> > Speakers > Mobile & desk microphones > DTMF microphones 	<ul style="list-style-type: none"> > Ruggedized > Limited keypad > Color touchscreen (XG-100M) 	<ul style="list-style-type: none"> > Magnetic > Broadband > GPS



VIDA® CORE AND BeOn®

Connectivity is at the core of everything we do. We leverage our expertise in communications technologies for the strongest military in the world to develop advanced solutions for First Responders. From our powerful VIDA Core network and BeOn Push-To-Talk mobile application, to our converged LTE LMR solutions, we're dedicated to delivering not just the first, but the best products available today.

- > Maintained First Responder connectivity in Florida, Texas and Puerto Rico during a decade of hurricanes, including Harvey, Irma and Maria
- > Successfully deployed more than 500 trunked radio systems throughout U.S. and Canada
- > Engineered wide-area and multi-state LMR systems for some of the nation's largest commercial companies

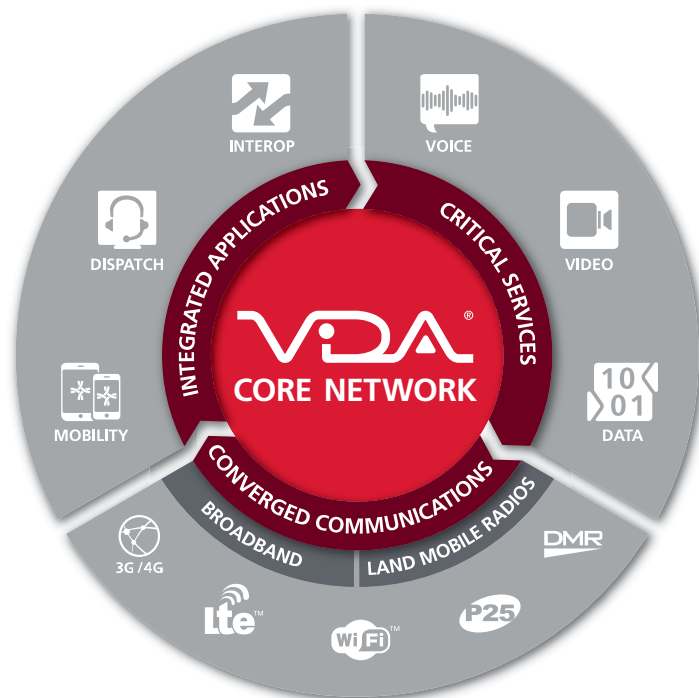

ONE SYSTEM
ONE COMPLETE SOLUTION

FAST. FORWARD.

PORTABLE AND MOBILE RADIO FAMILY

© 2020 L3Harris Technologies, Inc. | 09/2020 PSPC BR1303Q

Non-Export Controlled Information

L3Harris Technologies is an agile global aerospace and defense technology innovator, delivering end-to-end solutions that meet customers' mission-critical needs. The company provides advanced defense and commercial technologies across air, land, sea, space and cyber domains.

FirstNet and FirstNet Ready are registered trademarks and service marks of the First Responder Network Authority.

