




L3HARRIS™
FAST. FORWARD.

ULTRA-COMPACT MWIR INFRARED IMAGING ENGINE

Onyx SD/HD

	ONYX SD	ONYX HD
Camera System Parameters		
Sensor Type	HOT MWIR, reticulated FPA	HOT MWIR, reticulated FPA
Sensor Size	640 x 512 pixels, 15 µm pitch	1280 x 720 pixels, 8 µm pitch
Spectral Band	MWIR	MWIR
f/#	4.0 standard, options for 2.3 and higher	2.3
System Control	RS-422 serial interface (115.2 kbps)	RS-422 serial interface (115.2 kbps)
Video Format	NTSC/PAL SDI and serial differential CameraLink®	CameraLink® HD-SDI
Cooler	Linear closed-cycle Stirling	Linear closed-cycle Stirling
Power Requirements		
Power Source	+12 VDC	+12 VDC and +5 VDC
Operating	< 9 W typical at 23 °C	< 10 W
Cool-Down	< 20 W typical at 23 °C	< 20 W
Turn On	< 20 W	< 20 W
Mechanical/Environmental		
Weight	< 2.75 lb	< 2.75 lb
Size	4.8" L x 3.3" W x 3.5" H including cooler electronics	4.8" L x 3.3" W x 3.5" H including cooler electronics
Operating Temperature	-40 °C to +70 °C	-40 °C to +70 °C
Storage Temperature	-40 °C to +85 °C	-40 °C to +85 °C
Typical Performance		
Cool-Down Time	< 6 minutes	< 6 minutes
Operability	> 99.5% of pixels	> 99.4% of pixels

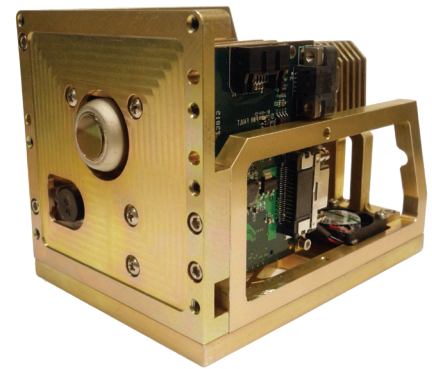

Low size, weight and power (SWaP) and great video in one camera. Onyx is one of the smallest high-resolution mid-wave infrared (MWIR) cooled cameras in the world. Based on our high-operating temperature (HOT) MWIR focal plane array (FPA) technology, this high-performance camera delivers superior imaging quality and is ideally suited for SWaP-sensitive air, sea and land applications. This unit has been designed for easy integration into a variety of applications, including electro-optical payloads, weapon sights, handheld viewers, remote weapon stations and enhanced vision systems. Onyx consists of an integrated detector/dewar cooler assembly and camera electronics combined with our patented image enhancement processing.

Onyx provides a full range of video processing options which allow use of a common module in multiple platforms. The Onyx features local area contrast enhancement, proprietary detail and enhancement algorithm, interpolated electronic zoom up to 4x, 3- or 5-point non-uniformity correction (NUC), autofocus, edge enhancement, adaptive temporal noise reduction, 30 or 60 Hz operation and integration time adjustment. Also included are selectable region of interest for AGLC and ALC, lens control, image polarity (white or black hot), muzzle flash suppression, manual gain and level control, video freeze, video orientation, up to 8 selectable dynamic ranges and scene-based NUC. Electronic image stabilization and turbulence mitigation are available only in the SD version. The system also provides built-in test and on-board temperature sensors.



BENEFITS

At less than 2.75 lb and with low-power consumption, our Onyx is the perfect high-performance, miniature camera for small SWaP platforms. Small element pixel pitch enables miniaturization of the assembly and optics. L3Harris' image-enhancement processing delivers exceptional image quality in all light levels and features automatic gain control and NUC. Our HOT MWIR FPA technology enables an ultra-small cryocooler. Patented reticulated pixels eliminate FPA "cross-talk," resulting in an exceptionally crisp infrared image. Steady-state power consumption is typically less than 9 W. Proven technology enables high-sensor reliability and significantly lowers total life-cycle costs.

Ultra-Compact MWIR Infrared Imaging Engine (Onyx SD/HD)

© 2020 L3Harris Technologies, Inc. | 03/2020

This data sheet consists of L3 Cincinnati Electronics Corporation, dba L3Harris Technologies, general capabilities information that does not contain controlled technical data as defined within the International Traffic in Arms (ITAR) Part 120.10 or Export Administration Regulations (EAR) Part 734.7-11., and also contains information that has been released into the public domain in accordance with the International Traffic in Arms Regulations (ITAR) 22 CFR 120.11(a)(7).

L3Harris Technologies is an agile global aerospace and defense technology innovator, delivering end-to-end solutions that meet customers' mission-critical needs. The company provides advanced defense and commercial technologies across air, land, sea, space and cyber domains.



L3HARRIS™
FAST. FORWARD.

1025 W. NASA Boulevard
Melbourne, FL 32919
t 800 852 5105 | f 513 573 6290
InfraredSales.cin@L3Harris.com