

9.5" DIRECTIONAL ANTENNA

Compact and Reliable Directional Ku-band Antenna

L3Harris compact 9.5" Directional Antenna provides 26 dBi of gain in the Ku-Band and is packaged in a lightweight two-axis pedestal. This antenna is ideal for use in UAVs or manned platforms requiring maximum gain for high-throughput, long-range applications.

PRODUCT DESCRIPTION

The 9.5" Directional Antenna is a low-profile, low-drag solution to implementing CDL and STANAG 7085 systems where long-range and high-availability requirements necessitate the use of airborne directional antennas. The 9.5" Directional Antenna offers 26 dBi of gain and is right-hand circularly polarized.

PRODUCT CUSTOMIZATION

The 9.5" Directional Antenna is a member of the L3Harris data link product family, but it can be used for any application requiring a Ku-Band, high-gain, two-axis antenna. The antenna interfaces with 28 VDC standard power, a standard RF coaxial connector and an RS-485 antenna control port.

The antenna consists of the following major components:

- > A directional radiating RF element
- > RF interconnecting components
- > A two-degrees-of-freedom antenna pedestal for pointing
- > Motors and angular position feedback sensors
- > An electronic module for motor drive, position-sensing interface, data interfaces and power conversion

The antenna pedestal operates as a pointing antenna, receiving its positioning commands over the RS-485 bus at up to 20 times per second, ensuring precise pointing even during dynamic airborne maneuvers. The two-degrees-of-freedom pedestal ensures proper pointing at long and short ranges.

The antenna assembly uses nonvolatile memory to store user-defined boresight offsets as necessary. The antenna contains built-in test capability to detect 95 percent of possible faults and report the results of the test on the RS-485 status bus.



Use of U.S. DoD visual information does not imply or constitute DoD endorsement.

Reliable Performance in a Compact Design

KEY FEATURES

- > Reliable, low-cost, two-axis gimble
- > High-efficiency parabolic reflector
- > Compact, high-gain design

BENEFITS

- > Rapid pointing capabilities maintain link through flight dynamics
- > Highest gain in class, maximizing throughput and range

SPECIFICATIONS

PERFORMANCE CHARACTERISTICS

RF

- > Ku-Band CDL: 14.40 GHz to 15.4 GHz

Gain

- > 26 dBi

Beam Width Maximum

- > 7.0° at 3 dB

Side Lobes

- > 15.0 dB down from main beam

Polarization

- > Right-hand circular

Axial Ratio at Beam Peak

- > 2.0 dB (max)

VSWR (over frequency)

- > 1.5:1 (max)

RF Power Handling

- > 50 W

Control/Status Interface

- > RS-485 interface to and from data link antenna controller


PHYSICAL CHARACTERISTICS

SWaP:

- > Size: 10.2" (dia) x 14.6" (h)
- > Weight: < 10 lb.
- > Power: 42 W (max) at +28 VDC +/- 10%

Environmental

- > Humidity: (antenna) 95% with condensation, operating
- > Altitude: 70,000 ft. (max), operating
- > Temperature:
 - Operating: -54 °C to +71 °C
 - Non-operating: -57 °C to +95 °C
- > Shock:
 - Operating: 20 G
 - Non-operating: 30 G, 18 msec, half sine

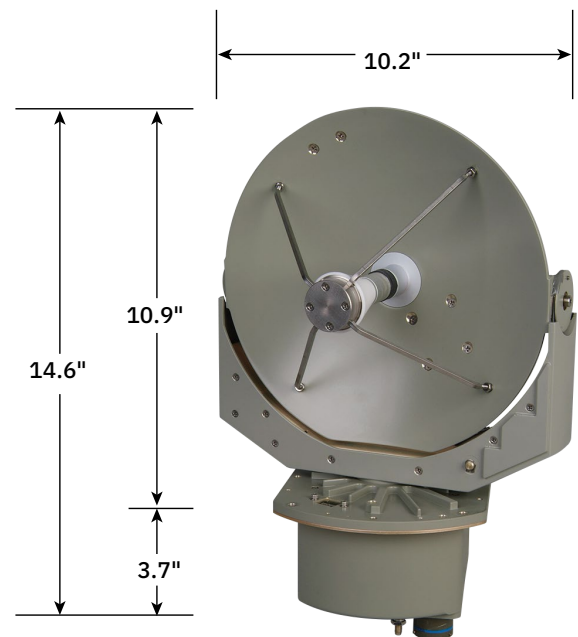

9.5" Directional Antenna

© 2020 L3Harris Technologies, Inc. | 12/2020 | BCS | 17-DSD-185 | Rev-201

These item(s)/data have been reviewed in accordance with the International Traffic in Arms Regulations (ITAR), 22 CFR part 120.11, and the Export Administration Regulations (EAR), 15 CFR 734(3)(b)(3), and may be released without export restrictions.

L3Harris Technologies is an agile global aerospace and defense technology innovator, delivering end-to-end solutions that meet customers' mission-critical needs. The company provides advanced defense and commercial technologies across air, land, sea, space and cyber domains.

Use of U.S. DoD visual information does not imply or constitute DoD endorsement.



1025 W. NASA Boulevard
Melbourne, FL 32919
t 833 537 6837
CSW.Products@L3Harris.com