




L3HARRIS®
FAST. FORWARD.

ARDE PART NUMBER 4394

All Metal

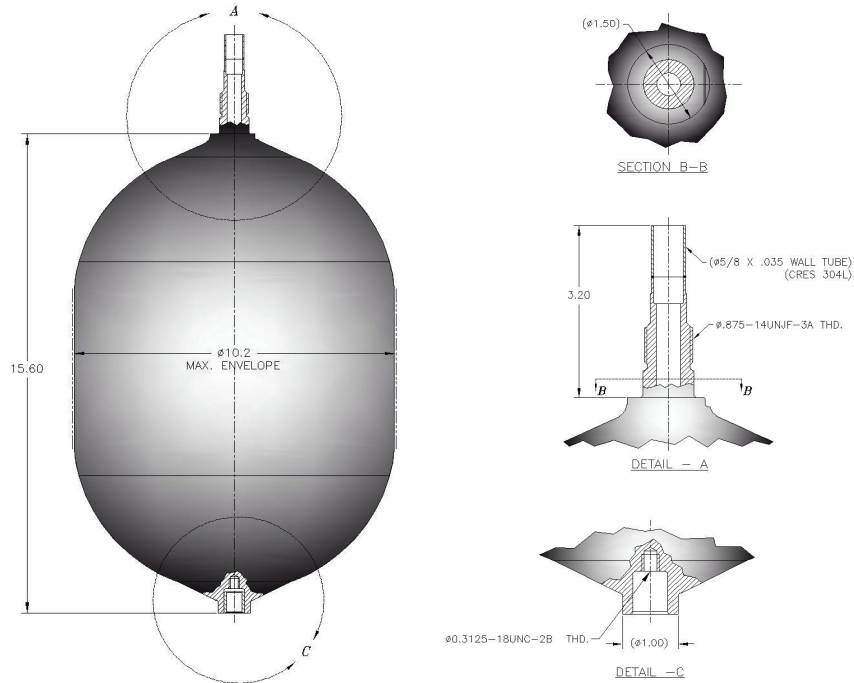

SPECIFICATIONS	
Volume (cubic inches)	847
Operating Pressure (psig)	1050
Proof Factor	1.5
Minimum Burst Factor	2.0
Actual Rupture Pressure (psig)	2840
Weight (pounds)	6.4
Environmental Vibration Load (CO ₂)	Component qual
	Axial 6.1 Grms
	Lateral 6.1 Grms
Qualification Basis Standard	AIAA-S-080

MATERIAL OF CONSTRUCTION	
Tank	Cryoformed CRES 301
Fluid Interface	CRES 304L

For more information call L3Harris at (201) 270-5800 or email ContactARDE@L3Harris.com

ARDE Part Number 4394

© 2024 L3Harris Technologies, Inc. | 08/2024 | L25290

NON-EXPORT CONTROLLED: THIS DOCUMENT CONSISTS OF INFORMATION THAT IS NOT DEFINED AS CONTROLLED TECHNICAL DATA UNDER ITAR PART 120.33 OR TECHNOLOGY UNDER EAR PART 772.

L3Harris Technologies is the Trusted Disruptor in the defense industry. With customers' mission-critical needs always in mind, our employees deliver end-to-end technology solutions connecting the space, air, land, sea and cyber domains in the interest of national security. Visit [L3Harris.com](https://www.l3harris.com) for more information.

L3Harris Technologies, Inc.

1025 W. NASA Boulevard
Melbourne, FL 32919

[L3Harris.com](https://www.l3harris.com)