



# WORLDVIEW LEGION



DATA SHEET




## WorldView Legion

WorldView Legion is the next generation of Maxar Intelligence's industry-leading Earth observation constellation. WorldView Legion is a fleet of high-performance satellites that triples Maxar's capacity to collect 30-cm class imagery, with more than 6 million sq km collected per day when combined with the entire Maxar constellation. With a mix of sun-synchronous and mid-inclination orbits, WorldView Legion dramatically expands Maxar's ability to revisit high-interest areas to better inform critical, time-sensitive decisions.

### Features and benefits

- High-resolution imagery (30 cm-class)
- 8-band VNIR multispectral imagery for a wide variety of applications
- Industry-leading precision geolocation accuracy (<5 m CE90) without ground control points
- Communications system compatible with Maxar's existing ground network and Direct Access Facilities (DAFs)
- Direct Access tasking from and to customer sites using customer-unique encryption keys
- Simultaneous receive, image and downlink operations
- Large area mono and stereoscopic collection eliminates temporal variations
- 10-year mission life consistent with WorldView satellites

WorldView Legion will have three product levels. Basic products (Level 1B) provide sensor-oriented, radiometrically-calibrated mono and stereo imagery for users to do their own image geo or orthorectification. Standard products (Level 2A/2B) are map-projected with uniform pixel spacing across products for image manipulation and analysis by image processing software. Finally, Ortho Products (Level 3) are ideal for image viewing and locational reference when high positional accuracy is required.

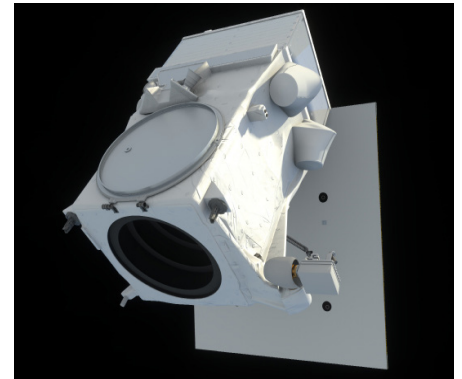


Artist's rendering of a WorldView Legion satellite

# MAXAR

Specifications

Orbit	Altitude: 518 km Type: sun-synchronous and mid-inclination
Life	Expected service life: >10 years
Spacecraft and mass	Size: ~3 m tall x ~2 m x ~2 m (not including width of solar array) Dry mass: ~630 kg
Sensor bands	Panchromatic: 450 - 800 nm 8 Multispectral Coastal Blue: 400 - 450 nm Blue: 450 - 510 nm Green: 510 - 580 nm Yellow: 585 - 625 nm Red: 630 - 690 nm Red Edge1: 695 - 715 nm Red Edge2: 730 - 750 nm Near-IR: 770 - 895 nm
Ground Sample Distance (GSD)	Panchromatic nadir: 34 cm Multispectral nadir: 1.36 m
National Imagery Interpretability Rating Scale (NIIRS)	5.9
Swath width	At nadir: 10.0 km
Geolocation accuracy	< 5 m CE90 without ground control points <1.5 m RMSE

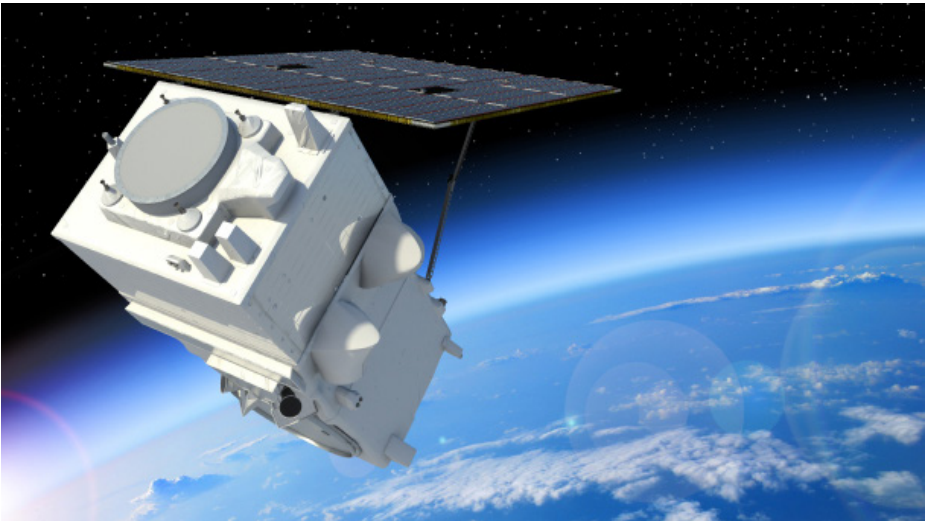

SENSOR BANDS

- Panchromatic
- 8-band multispectral