

ENHANCED-CLS 2 **OMNIDIRECTIONAL ANTENNA**

Reliable ROVER® links in today's battlefield environment

The Enhanced-CLS 2 (E-CLS 2) antenna updates the widely fielded E-CLS antenna with capabilities to match today's electronics-heavy environments. New tunable receive channel filtering and increased output power ensure your ROVER® system will link up more reliably than ever before, bringing critical data to the warfighter.

PRODUCT DESCRIPTION

The Enhanced-CLS 2 Omnidirectional Antenna receives in C, L and S Bands, and transmits in L and S Bands. This second generation has dramatically improved the ability to pick out a desired signal in the presence of other nearby interfering signals by including tunable channel filtering. On the transmit side, maximum output power mode can improve the range by as much as 50%.

The E-CLS 2 is a form, fit and function replacement for its predecessor and is compatible with both the ROVER 6 and the ROVER 6S transceivers.

Upgrades from E-CLS to E-CLS 2 are available.



Maximize the performance
of your ROVER 6 or
ROVER 6S system


KEY FEATURES

- > Improved performance in crowded RF environments
- > Integrated SSPA, low-noise amplifier and band-pass filtering
- > Transmit or receive operation (not simultaneously)
- > Integrated automatic band switching
- > Tunable receive channel filtering
- > Maximum transmit power mode
- > Linear vertical polarization

SPECIFICATIONS

RF PERFORMANCE CHARACTERISTICS

- > Transmit and receive capability (not simultaneously)
 - C-Band: 4400 MHz to 4850 MHz (Rx only)
 - S-Band: 2025 MHz to 2110 MHz, 2200 MHz to 2500 MHz
 - L-Band: 1625 MHz to 1850 MHz
- > Maximum antenna gain: 2 dBi C-Band, 1.5 dBi S-Band, 0 dBi L-Band
- > Total gain: 15 dB to 25 dB
- > Legacy mode noise figure: < 4.5 dB (all bands)
- > Enhanced mode noise figure: < 5.1 dB (C-Band), < 5.3 dB (S-Band), < 5.7 dB (L-Band)
- > Minimum band-to-band signal rejection: 40 dB
- > Minimum adjacent channel signal rejection: 30 dB
- > OIP3: 20 dBm

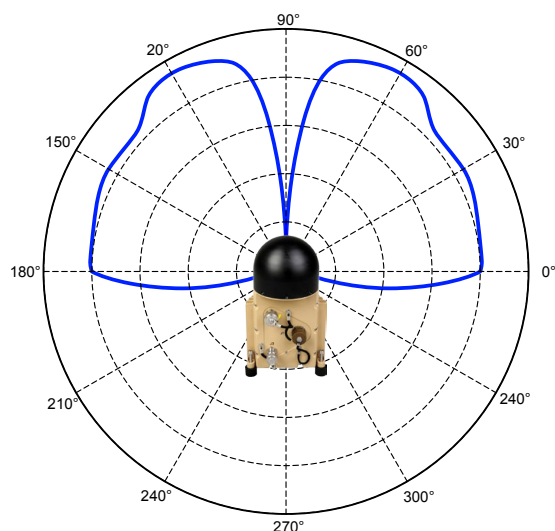

ANTENNA SWAP

- > Size: 8.15" (h) x 4.92" (w) x 4.34" (l)
- > Weight: ~3.5 lb.
- > Output power: 29 dBm (at antenna feed)
- > Max power mode: 33 dBm (without spectral mask optimization)



Enhanced-CLS 2 Omnidirectional Antenna

© 2025 L3Harris Technologies, Inc. | 10/2025 | BCS | 19-DSD-213 | Rev-202

NON-EXPORT CONTROLLED: THIS DOCUMENT CONSISTS OF INFORMATION THAT IS NOT DEFINED AS CONTROLLED TECHNICAL DATA UNDER ITAR PART 120.33 OR TECHNOLOGY UNDER EAR PART 772.

L3Harris Technologies is the Trusted Disruptor in the defense industry. With customers' mission-critical needs always in mind, our employees deliver end-to-end technology solutions connecting the space, air, land, sea and cyber domains in the interest of national security. Visit [L3Harris.com](https://www.l3harris.com) for more information.



1025 W. NASA Boulevard
Melbourne, FL 32919

[L3Harris.com](https://www.l3harris.com)