

## WIDEBAND PROGRAMMABLE MODEM (WPM-1000)

**Airborne Qualified Modem Capable of High-Rate Data Transfers Including Voice, HD Video, and File Transfer**

The WPM-1000 provides high-rate data transfers and AES encryption,\* and is software upgradable to host advanced communications waveforms enabling operations across a wide range of scenarios.

### PRODUCT DESCRIPTION

WPM-1000 delivers multiple capabilities to existing SATCOM terminals by supporting high bandwidth and processing applications. WPM-1000 can be software configured to provide high-rate data transfers or bandwidth for protected communications. The modem is ARSTRAT certified (OM-89) and adheres to stringent airborne operating environmental standards. Standard L-Band and Ethernet interfaces enable deployment of the WPM-1000 in most SATCOM terminal architectures.



\*AES may be export controlled



## High Bandwidth SATCOM Communications

### KEY FEATURES

- > MIL-STD-188-165B Communications
  - 64 kbps to 100 Mbps
  - BPSK, QPSK, 8PSK, OQPSK modulations
  - 1/2, 2/3, 3/4, 7/8, 19/20 rate turbo coding
- > L-Band interface
  - 950 MHz to 2120 MHz
  - Over 500 MHz instantaneous bandwidth
- > Dynamic Range of Modem Output Power Level
  - Tx -25dBm to 0dBm
  - Rx -55dBm to +10dBm
- > Information Throughput Adaptation (ITA)
- > Web-Based Graphic User Interface (GUI)
- > 60 Hz / 115 VAC Power Input
- > Gigabit Ethernet user port
- > AES 256 bit encryption with key negotiation in accordance with STANAG 4486 Edition 3
- > Software upgradable
  - GATEKEEPER™ Interference Excision System
- > OM-89 Variant ARSTRAT Certified

## SPECIFICATIONS

### Interfaces

- > Power: IEC60320 connector
- > IF Interface:
  - Tx output power: -25 dBm to 0 dBm (TNC-F)
  - Rx receive: < -55 dBm to +10 dBm (TNC-F)
- > Management Interface:
  - Gigabit Ethernet
  - SNMPv3
  - DHCP enabled
  - RJ-45 connector
- > User Interface:
  - RJ-45 user data gigabit Ethernet
  - EIA-530A user data serial interface\*
  - EIA-422 overhead channel\*
  - DB-9 GPIO – 1 RS-22 function\*
  - 3 LVDS lines\*
  - 10 MHz reference: input/output
  - Front panel maintenance port (J18)

\*Available in future software release

### SWaP


- > Size: 19" x 1.75" x 20" (1U rack mount)
- > Weight: <13 lb.
- > Power: 110–120 VAC 60 Hz, 100 W typical
- > Mounting: 1U-high 19" rack

### Environmental

- > Operating temperature: -15 °C to 55 °C
- > Non-operating temperature: -55 °C to 85 °C
- > Vibration: RTCA/DO-160G, Section 8, Table 8-1, Aircraft Zone 2, Curve B3, 3 axes
- > Operational shock: RTCA/DO-160G, Section 7: Category A, 3 axes
- > EMI/EMC: MIL-STD-461F, CS101, CS114, CS115, RE102, RS103
- > Electrostatic Discharge (ESD): RTCA/DO-160G, Section 25: Category A
- > EMI/EMC: MIL-STD-461F, CE102, CE116, CS101, CS114, CS115, RE102, RS103



Front Panel

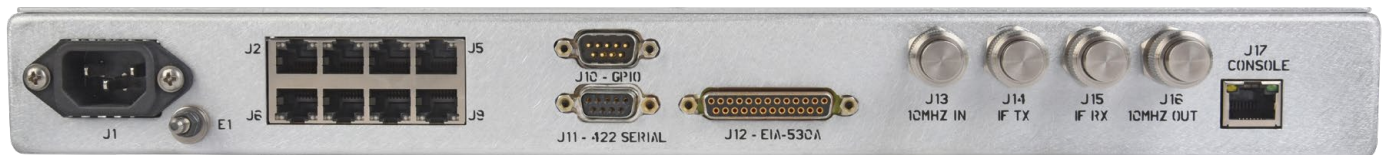

Back Panel

### Wideband Programmable Modem (WPM-1000)

© 2025 L3Harris Technologies, Inc. | 11/2025 | BCS | 17-DSH-180 | Rev-203

**NON-EXPORT CONTROLLED:** THIS DOCUMENT CONSISTS OF INFORMATION THAT IS NOT DEFINED AS CONTROLLED TECHNICAL DATA UNDER ITAR PART 120.33 OR TECHNOLOGY UNDER EAR PART 772.

L3Harris Technologies is the Trusted Disruptor in the defense industry. With customers' mission-critical needs always in mind, our employees deliver end-to-end technology solutions connecting the space, air, land, sea and cyber domains in the interest of national security. Visit [L3Harris.com](https://www.l3harris.com) for more information.



1025 W. NASA Boulevard  
Melbourne, FL 32919

[L3Harris.com](https://www.l3harris.com)