

Operator's Manual

14221-1800-2050

Rev. K, February 2026



XL Extreme™ Series

Portable Radios



L3HARRIS®

FAST. FORWARD.

MANUAL REVISION HISTORY

REV.	DATE	REASON FOR CHANGE
-	Dec/21	Initial release.
A	May/22	Added LTE (XL-400P-NA). Updated Table 4-1.
B	Jun/22	Minor updates throughout.
C	Aug/22	Added radio model numbers.
D	Jan/23	Updated to support NFPA certification.
E	Sep/23	Updated Table 5-2, Section 6.10.2, and Section 4.2. Added Appendix D.2.4.
F	Nov/23	Updated battery part number in Section 3, updated Table 5-5, updated note in Section 6.10.2, updated Table 5-4 and Table 5-5. Added option number to Table 4-1. Added Section 5.36.
G	Nov/23	Updated Section 3. Added Note about batteries shipped in shutdown mode.
H	Mar/24	Updated Section 4.6.
J	Jan/25	Minor update to Section 4 and Section 6.14.
K	Feb/26	Updated Section 5.10 and Table 5-2.

L3Harris Technologies, Public Safety and Professional Communications (PSPC) Business continually evaluates its technical publications for completeness, technical accuracy, and organization. You can assist in this process by submitting your comments and suggestions to the following:

L3Harris Technologies, Inc.
PSPC Business

fax your comments to: 1-434-455-6851
or

Technical Publications
221 Jefferson Ridge Parkway
Lynchburg, VA 24501

e-mail us at: PSPC_TechPubs@l3harris.com

CREDITS

L3Harris, Harris, BeOn, VIDA, EDACS, NetworkFirst, and OpenSky are registered trademarks of L3Harris Technologies. XL-Virtual is a trademark of L3Harris.

Bluetooth is a registered trademark of Bluetooth SIG, Inc.

Motorola is a registered trademark of Motorola, Inc.

AMBE is a registered trademark and IMBE, AMBE+, and AMBE+2 are trademarks of Digital Voice Systems, Inc.

Wi-Fi is a registered trademark of Wi-Fi Alliance.

All brand and product names are trademarks, registered trademarks, or service marks of their respective holders.

NOTICE!

THIS DEVICE MEETS THE REQUIREMENTS OF NFPA 1802 STANDARD ON TWO-WAY PORTABLE RF VOICE COMMUNICATIONS DEVICES FOR USE BY EMERGENCY SERVICES PERSONNEL IN THE HAZARD ZONE, 2021 EDITION.

THIS INFORMATION IS CONTROLLED BY THE U.S. DEPARTMENT OF COMMERCE EXPORT ADMINISTRATION REGULATIONS 15 CFR 730-774, EAR99. (EAR99.10.2023)

Information and descriptions contained herein are the property of L3Harris Technologies. Such information and descriptions may not be copied or reproduced by any means or disseminated or distributed without the express prior written permission of L3Harris Technologies, PSPC Business, 221 Jefferson Ridge Parkway, Lynchburg, VA 24501.

Repairs to this equipment should be made only by an authorized service technician or facility designated by the supplier. Any repairs, alterations or substitutions of recommended parts made by the user to this equipment not approved by the manufacturer could void the user's authority to operate the equipment in addition to the manufacturer's warranty.



This product conforms to the European Union WEEE Directive 2012/19/EU. Do not dispose of this product in a public landfill. Take it to a recycling center at the end of its life.



L3Harris products comply with the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive.

This manual is published by **L3Harris Technologies** without any warranty. Improvements and changes to this manual necessitated by typographical errors, inaccuracies of current information, or improvements to programs and/or equipment, may be made by **L3Harris Technologies** at any time and without notice. Such changes will be incorporated into new editions of this manual. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose, without the express written permission of **L3Harris Technologies**.

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
1. REGULATORY AND SAFETY INFORMATION	8
1.1 SAFETY CONVENTIONS	8
1.2 OVER-TEMPERATURE CONDITION	8
1.3 RATED TRANSMITTER RF OUTPUT POWER	8
1.4 SAFETY TRAINING INFORMATION	9
1.4.1 RF Exposure Guidelines	9
1.4.2 Electromagnetic Interference/Compatibility	10
1.5 REGULATORY APPROVALS	10
1.5.1 Part 15.....	11
1.5.2 Industry Canada	11
1.6 OPERATING TIPS	11
1.6.1 Efficient Radio Operation.....	11
1.6.2 Antenna Care and Replacement.....	12
1.6.3 Electronic Devices	12
1.6.4 Aircraft.....	12
1.6.5 Electric Blasting Caps.....	12
1.6.6 Potentially Explosive Atmospheres	12
2. RENSEIGNEMENTS SUR LA RÉGLEMENTATION ET SÉCURITÉ.....	13
2.1 CONVENTIONS SUR LES SYMBOLES DE SÉCURITÉ.....	13
2.2 RENSEIGNEMENTS SUR LA FORMATION SUR LA SÉCURITÉ	13
2.2.1 Directives sur l'exposition aux RF	14
2.2.2 Interférence/Compatibilité Électromagnétique	15
2.3 INTERFÉRENCE DES RADIOFRÉQUENCES	15
2.3.1 Partie 15 de la FCC	15
2.3.2 Industrie Canada	15
2.4 CONSEILS D'UTILISATION.....	15
2.5 UTILISATION EFFICACE DE LA RADIO	16
2.5.1 Entretien Et Remplacement De L'antenne	16
2.5.2 Appareils Électroniques	16
2.5.3 Avion	16
2.5.4 Détonateurs Électriques	17
2.5.5 Atmosphère Potentiellement Explosive.....	17
3. CLASS I, DIVISION 2 OPTION	18
3.1 CLASS I, DIVISION 2 ACCESSORIES	19
3.2 INTRINSICALLY SAFE DEVICE ENTITY PARAMETERS	20
4. INTRODUCTION	22
4.1 DESCRIPTION	22
4.2 RADIO MODELS.....	23
4.3 STORAGE GUIDELINES	23
4.4 BASIC SETUP	23
4.4.1 Assemble the Radio	23
4.4.2 Removing the Battery	25
4.4.3 Removing the Optional Belt Clip or D-Post	25
4.5 UNIVERSAL DEVICE CONNECTOR.....	26
4.6 CLEANING.....	26
4.7 OPTIONS AND ACCESSORIES.....	27

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
4.8 RELATED PUBLICATIONS	28
5. BASIC OPERATION.....	29
5.1 RADIO CONTROLS	29
5.2 BEFORE FIRST USE	32
5.3 POWER ON AND SET VOLUME	32
5.4 VIDA ID	32
5.4.1 User Login.....	32
5.4.2 Provisioning	33
5.5 RADIO DISPLAYS.....	33
5.5.1 Top Display	33
5.5.2 Front Display	34
5.6 MANDOWN	36
5.7 STATUS MESSSAGES	36
5.8 PREDEFINED MENU LAYOUTS.....	37
5.9 MENU.....	39
5.10 ALERT TONES.....	42
5.11 SELECT ZONE/SYSTEM	43
5.12 SELECT GROUP/CHANNEL AND BANK.....	44
5.13 LOCK/UNLOCK KEYPAD.....	45
5.14 GROUP CALLS	45
5.14.1 Transmit a Group Call	45
5.14.2 Receive a Group Call	46
5.15 INDIVIDUAL CALLS	46
5.15.1 Add/Edit Contact from the Radio	46
5.15.2 Transmit an Individual Call	47
5.15.3 Receiving an Individual Call	48
5.16 USER PROFILES.....	48
5.17 NOISE CANCELLATION	49
5.17.1 Enable Noise Cancellation	50
5.17.2 Using Noise Cancellation	50
5.17.3 The Effect of Distance from the Microphone.....	51
5.17.4 Primary versus Secondary Microphone.....	51
5.17.5 When using a Self-Contained Breathing Apparatus (SCBA) Mask	51
5.18 PTT OPTIONS.....	51
5.19 VOICE ANNUNCIATION	52
5.20 ENABLE/DISABLE ENCRYPTION	52
5.21 TRANSMIT ENABLE/DISABLE	53
5.22 CHANNEL GUARD (ANALOG CONVENTIONAL ONLY)	53
5.23 USE TALKAROUND TO BYPASS REPEATER (ANALOG AND P25 CONVENTIONAL ONLY)	54
5.24 TYPE 99 OPERATION	55
5.24.1 Enable/Disable Type 99	56
5.24.2 Disable After PTT	56
5.24.3 Auto Reset	56
5.25 CALL ALERT (PAGE).....	56
5.25.1 Send Alert	56
5.25.2 Receive Alert.....	57
5.26 TELEPHONE INTERCONNECT	57

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
5.27 DTMF	58
5.28 AUDIO PLAYBACK	58
5.29 START SCAN	59
5.30 STOP SCAN	60
5.31 MONITOR AND SQUELCH TYPES (CONVENTIONAL ONLY)	61
5.32 NUISANCE DELETE	62
5.33 FAILSOFT	63
5.33.1 Conventional Failsoft (EDACS Only)	63
5.33.2 Failsoft (P25 Trunked)	63
5.34 EMERGENCY OPERATION	64
5.34.1 Declaring an Emergency Call	64
5.34.2 Receiving an Emergency Call	64
5.34.3 Stealth Emergency	64
5.35 MDC-1200 (ANALOG CONVENTIONAL ONLY)	65
5.35.1 Normal PTT Operation	65
5.35.2 MDC PTT ID Receive Handling	65
5.35.3 Emergency Declaration	65
5.36 MULTIGROUP (P25 TRUNKING ONLY)	66
5.37 XL-VIRTUAL/BEON OPERATION	66
5.37.1 Overview	66
5.37.2 Wi-Fi Client Selection	68
5.38 STEALTH MODE	69
6. ADVANCED OPERATIONS	70
6.1 VIEW/CHANGE PERSONALITIES	70
6.1.1 View Personalities	70
6.1.2 Change Active Personality	71
6.2 SITUATIONAL AWARENESS (SA) – P25 CONVENTIONAL ONLY	72
6.3 USER-DEFINED ZONES/SYSTEMS	73
6.3.1 Command Tactical Zone	73
6.3.2 Mixed System Zone	74
6.4 CH INFO MENU	75
6.5 AUDIO SETTINGS	75
6.6 DISPLAY SETTINGS	76
6.7 GPS SETTINGS	77
6.8 POSITION INFO	78
6.9 WI-FI	79
6.10 BLUETOOTH	80
6.10.1 Enable Bluetooth	80
6.10.2 Pair Devices	81
6.10.3 Reconnecting to Covert Bluetooth Microphone 12082-0684-01	82
6.10.4 Pair with the SCOTT EPIC 3 Radio Direct Interface (RDI) Voice Amplifier	82
6.11 CLOCK SETTINGS	83
6.12 BATTERY INFO	83
6.13 SELECT LANGUAGE	84
6.14 SET UP SCAN	84
6.14.1 Default, Priority 1, and Priority 2 Channels	85
6.14.2 Trunked/Conventional Scanning	85
6.14.3 Vote Scan (Analog and P25 Conventional Only)	86

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
6.14.4 Edit Scan List	86
6.14.5 Set or Remove Priority 1 and Priority 2 Channels.....	87
6.14.6 Custom Scan Lists	88
6.14.7 Wide Area System Scan (P25 Trunked and EDACS).....	89
6.14.8 Site Lock	90
6.15 RADIO STATUS	90
6.16 RADIO MESSAGE.....	91
6.17 RADIO TEXTLINK	92
6.17.1 Radio TextLink Messages	92
6.17.2 Radio TextLink Forms	93
6.17.3 View Received Messages	94
6.18 FAULTS/ALERTS	94
6.19 TONE ENCODE	95
6.20 ENCRYPTION.....	96
6.20.1 Zeroize Keys from Radio.....	96
6.20.2 Protected Keys.....	96
6.20.3 Global Encryption.....	96
6.20.4 Select Keyset.....	97
6.20.5 View Key List	98
6.20.6 Delete Individual Keys.....	98
6.20.7 OTAR Configuration.....	99
6.21 P25 CONVENTIONAL FALLBACK.....	99
6.22 EMERGENCY CHECK-IN TIMER	100
7. PROGRAMMING	101
7.1 L3HARRIS DEVICE MANAGEMENT	101
7.2 PROGRAMMING VIA RPM2	102
7.3 EDIT CHANNEL (ANALOG AND P25 CONVENTIONAL ONLY)	102
7.4 OTAP	104
7.5 PROGRAMMABLE BUTTONS AND SWITCHES	105
7.5.1 Programmable Buttons	105
7.5.2 Programmable A/B (Ø/O) Switch.....	107
7.5.3 Programmable A/B/C/D Switch	107
7.6 PROGRAMMABLE ICONS.....	109
7.6.1 Top Display	109
7.6.2 Front Display	109
8. REFERENCE	110
8.1 MARINE FREQUENCIES	110
8.2 NARROWBANDING	111
9. GLOSSARY	112
10. BASIC TROUBLESHOOTING	115
10.1 ERROR MESSAGES.....	115
10.2 OTAR ERRORS/INFORMATION.....	117
11. TECHNICAL ASSISTANCE.....	118
12. WARRANTY	118
APPENDIX A PREVENTIVE MAINTENANCE.....	119

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
APPENDIX B WI-FI PROGRAMMING	120
APPENDIX C SCBA BLUETOOTH CONFIGURATION.....	126
APPENDIX D CONFIGURING ENCRYPTION	128

LIST OF FIGURES

Figure 4-1: Radio Assembly	24
Figure 4-2: Remove the Battery	25
Figure 4-3: Universal Device Connector	26
Figure 5-1: Radio Controls	29
Figure 5-2: XL Extreme Speaker Microphone Controls.....	30
Figure 5-3: Top Display	33
Figure 5-4: Sample Idle Front Display	34
Figure 5-5: Using Noise Cancellation	50
Figure 6-1: Enabling Wi-Fi.....	79
Figure 6-2: Wi-Fi Install Active.....	79
Figure B-1: Options → Network Configuration.....	121
Figure B-2: Wi-Fi Configuration	121
Figure B-3: Service Name	121
Figure B-4: Enable Wi-Fi in RPM2	122
Figure B-5: Enable Wi-Fi Programming Mode on Radio	123

LIST OF TABLES

Table 1-1: RF Exposure Compliance Tested Distances (Worst Case Scenario).....	10
Tableau 2-1 : Distances de test de conformité des expositions aux RF (pire des scénarios).....	14
Table 3-1: I.S. Equipment and Associated Apparatus	20
Table 4-1: Options and Accessories.....	27
Table 5-1: Radio Controls, Indicators, and Connectors	30
Table 5-2: Radio Icons	35
Table 5-3: Status Messages.....	36
Table 5-4: Predefined Menu Layouts.....	37
Table 5-5: Menu Navigation	39
Table 5-6: Alert Tones.....	42
Table 5-7: P25 Feature Support versus XL-Virtual Feature Support.....	67
Table 5-8: Supported Programmable Buttons	67
Table 7-1: Valid Frequency Ranges	104
Table 7-2: Programmable Button Options	105
Table 7-3: Programmable Ø/O Switch Options.....	107
Table 7-4: Single-Instance Features.....	107
Table 7-5: Indexed Features	108
Table 8-1: Marine Frequencies.....	110
Table 10-1: Displayed Error Messages, Reasons, and Resolutions	115
Table B-1: Wi-Fi Feature Support.....	124

1. REGULATORY AND SAFETY INFORMATION

1.1 SAFETY CONVENTIONS

The following conventions are used throughout this manual to alert the user to general safety precautions that must be observed during all phases of operation, service, and repair of this product. Failure to comply with these precautions or with specific warning elsewhere in this manual violates safety standards of design, manufacture, and intended use of the product. L3Harris assumes no liability for the customer's failure to comply with these standards.



The **WARNING** symbol calls attention to a procedure, practice, or the like, which, if not correctly performed or adhered to, could result in personal injury. Do not proceed beyond a **WARNING** symbol until the conditions identified are fully understood or met.



The **CAUTION** symbol calls attention to an operating procedure, practice, or the like, which, if not performed correctly or adhered to, could result in damage to the equipment or severely degrade the equipment performance.



The **NOTE** symbol calls attention to supplemental information, which may improve system performance or clarify a process or procedure.

1.2 OVER-TEMPERATURE CONDITION

When the radio reaches an internal temperature of 102°C, the high temperature alarm sounds. Alerts are indicated via the LED, an **OVERTEMP** alert on the display and voice announcements. The radio must be removed from service after an over-temperature condition.

1.3 RATED TRANSMITTER RF OUTPUT POWER

FREQUENCY	RATED RF POWER OUTPUT
VHF	6.0 W (5.0 W in Hazard Mode)
UHF	5.0 W
700 MHz	3.0 W
800 MHz	3.0 W

1.4 SAFETY TRAINING INFORMATION



The L3Harris XL-400P/XL-400P-NA portable radio generates RF electromagnetic energy during transmit mode. This radio is designed for and classified as “Occupational Use Only,” meaning it must be used only during the course of employment by individuals aware of the hazards and the ways to minimize such hazards. This radio is NOT intended for use by the “General Population” in an uncontrolled environment.

The XL-400P/XL-400P-NA portable radio has been tested and complies with the FCC RF exposure limits for “Occupational Use Only.” In addition, this L3Harris radio complies with the following Standards and Guidelines regarding RF energy and electromagnetic energy levels and evaluation of such levels for exposure to humans:

- FCC KDB Publication 447498 General RF Exposure Guidance
- American National Standards Institute (C95.1 – 1992¹), IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- American National Standards Institute (C95.3 – 1992), IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.
- IC Standard RSS-102. Radiofrequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).
- European Council Directive 89/391/EEC.

1.4.1 RF Exposure Guidelines



To ensure that exposure to RF electromagnetic energy is within the EU/AU/FCC/IC allowable limits for occupational use, always adhere to the following guidelines:

- DO NOT operate the radio without a proper antenna attached, as this may damage the radio and may also cause the FCC RF exposure limits to be exceeded. A proper antenna is the antenna supplied with this radio by L3Harris or an antenna specifically authorized by L3Harris for use with this radio. (Refer to Table 4-1.)
- DO NOT transmit for more than 50% of total radio use time (“50% duty cycle”). Transmitting more than 50% of the time can cause FCC RF exposure compliance requirements to be exceeded. The radio is transmitting when the “TX” indicator appears in the display. The radio will transmit by pressing the “PTT” (Push-To-Talk) button.
- ALWAYS transmit using low power when possible. In addition to conserving battery charge, low power can reduce RF exposure.
- ALWAYS use L3Harris authorized accessories (antennas, batteries, belt clips, speaker/mics, etc.). Use of unauthorized accessories may cause the FCC Occupational/Controlled Exposure RF compliance requirements to be exceeded. (Refer to Table 1-1.)

¹ Tested to ANSI C95.1-1992 in compliance with 47 CFR 2.1093. Meets or exceeds safety requirements of ANSI C95.1-2005.

- As noted in Table 1-1, ALWAYS keep the housing of the transmitter **AT LEAST** 0.47 inches (1.2 cm) from the body and at least 0.98 in (2.5 cm) from the face when transmitting to ensure EU/AU/FCC/IC RF exposure compliance requirements are not exceeded. However, to provide the best sound quality to the recipients of your transmission, L3Harris recommends you hold the microphone at least 2 in (5 cm) from mouth, and slightly off to one side.
- Refer to Standard EN 62311:2008.

Table 1-1: RF Exposure Compliance Tested Distances (Worst Case Scenario)

RADIO FREQUENCY	Body ²	Face
VHF (136 - 174 MHz)	0.47 in (1.2 cm)	0.98 in (2.5 cm)
UHF (378 - 522 MHz)	0.47 in (1.2 cm)	0.98 in (2.5 cm)
700/800 MHz (768 - 776 MHz) (798 - 806 MHz) (806 - 824 MHz) (851 - 870 MHz)	0.47 in (1.2 cm)	0.98 in (2.5 cm)
900 MHz (935-944 MHz) (896-902 MHz)	0.47 in (1.2 cm)	0.98 in (2.5 cm)
2400 MHz (2412 - 2472 MHz)	0.47 in (1.2 cm)	0.98 in (2.5 cm)
5 GHz (5.18 - 5.825 GHz)	0.47 in (1.2 cm)	0.98 in (2.5 cm)



NOTE

SAR Evaluation: 1g averaged, 50% PTT Duty Factor, Occupational/Controlled Exposure.

The information in this section provides the information needed to make the user aware of RF exposure, and what to do to assure that this radio operates within the FCC RF exposure limits.

1.4.2 Electromagnetic Interference/Compatibility

During transmissions, this L3Harris radio generates RF energy that can possibly cause interference with other devices or systems. To avoid such interference, turn off the radio in areas where signs are posted to do so. DO NOT operate the transmitter in areas that are sensitive to electromagnetic radiation such as hospitals, aircraft, and blasting sites.

1.5 REGULATORY APPROVALS

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

² This is worst case based on the thinnest body mount accessory (belt clip).

1.5.1 Part 15

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

1.5.2 Industry Canada

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

1.6 OPERATING TIPS

Antenna location and condition are important when operating a portable radio. Operating the radio in low-lying areas or terrain, under power lines or bridges, inside of a vehicle, or in a metal framed building can severely reduce the range of the unit. Mountains can also reduce the range of the unit.

In areas where transmission or reception is poor, some improvement may be obtained by ensuring that the antenna is vertical. Moving a few yards in another direction or moving to a higher elevation may also improve communications. Vehicular operation can be aided with the use of an externally mounted antenna.

Battery condition is another important factor in the trouble-free operation of a portable radio. Always properly charge the battery. Use of optional features, such as GPS, will impact operational run time.



Do not cover the microphone, speaker, connectors, buttons, etc., with any labels or other obstruction.

1.6.1 Efficient Radio Operation

Keep the antenna in a vertical position when receiving or transmitting a message.



Do NOT hold onto the antenna when the radio is powered on!



NEVER cover the air vent on the radio with any sticker or asset tag. Doing so could result in 100% loss of receive audio, low receive audio, distorted receive audio, etc.

1.6.2 Antenna Care and Replacement



Do not use the portable radio with a damaged or missing antenna. A minor burn may result if a damaged antenna comes into contact with the skin. Replace a damaged antenna immediately. Operating a portable radio with the antenna missing could cause personal injury, damage the radio, and may violate FCC regulations.



Use only the supplied or approved antenna. Unauthorized antennas, modifications, or attachments could cause damage to the radio unit and may violate FCC regulations. (Refer to Table 4-1.)

1.6.3 Electronic Devices



RF energy from portable radios may affect some electronic equipment. Most modern electronic equipment in cars, hospitals, homes, etc. is shielded from RF energy. However, in areas in which you are instructed to turn off two-way radio equipment, always observe the rules. If in doubt, turn it off!

1.6.4 Aircraft



- Always turn off a portable radio before boarding any aircraft!
- Use it on the ground only with crew permission.
- DO NOT use while in-flight!!

1.6.5 Electric Blasting Caps



To prevent accidental detonation of electric blasting caps, DO NOT use two-way radios within 1000 feet of blasting operations. Always obey the "Turn Off Two-Way Radios" signs posted where electric blasting caps are being used (OSHA Standard: 1926.900).

1.6.6 Potentially Explosive Atmospheres



Areas with potentially explosive atmospheres are often, but not always, clearly marked. These may be fueling areas, such as gas stations, fuel or chemical transfer or storage facilities, and areas where the air contains chemicals or particles, such as grain, dust, or metal powders.

Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death.

Turn off two-way radios when in any area with a potentially explosive atmosphere. It is rare, but possible that a radio or its accessories could generate sparks.

2. RENSEIGNEMENTS SUR LA RÉGLEMENTATION ET SÉCURITÉ

2.1 CONVENTIONS SUR LES SYMBOLES DE SÉCURITÉ

Les conventions suivantes sont utilisées dans le présent manuel pour avertir l'utilisateur des précautions générales de sécurité qui doivent être observées pendant toutes les phases d'opération, d'entretien et de réparation de ce produit. Le non-respect de ces précautions ou d'avertissements précisés ailleurs enfreint les normes de sécurité de la conception, de la fabrication et de l'utilisation prévue du produit. L3Harris n'assume aucune responsabilité pour le non-respect de ces normes par le client.



Le symbole **MISE EN GARDE** attire l'attention sur une procédure ou une pratique qui, si elle n'est pas correctement effectuée ou observée, pourrait entraîner une blessure personnelle. Ne pas poursuivre au-delà d'un symbole de **MISE EN GARDE** avant que les conditions identifiées soient complètement comprises ou satisfaites.



Le symbole **AVERTISSEMENT** attire l'attention sur une procédure ou une pratique opérationnelle qui, si elle n'est pas correctement effectuée ou observée, pourrait entraîner un bris d'équipement ou une importante baisse de rendement de l'équipement.



Le symbole **REMARQUE** attire l'attention sur des renseignements supplémentaires qui peuvent améliorer le rendement du système ou clarifier un processus ou une procédure.

2.2 RENSEIGNEMENTS SUR LA FORMATION SUR LA SÉCURITÉ



La radio portative L3Harris XL-400P/XL-400P-NA produit de l'énergie électromagnétique des RF lorsqu'en mode de transmission. Cette radio est conçue et classée pour une « Utilisation professionnelle seulement », ce qui signifie qu'elle ne doit être utilisée que dans le cadre d'un emploi par des individus conscients des risques et des moyens de limiter ceux-ci. Cette radio **N'EST PAS** conçue pour une utilisation par la « Population générale » dans un environnement non contrôlé.

La radio portative XL-400P/XL-400P-NA a été testée et est conforme aux limites d'exposition aux RF de la FCC pour une « Utilisation professionnelle seulement ». De plus, cette radio L3Harris est conforme aux normes et directives suivantes quant à l'énergie des RF et aux niveaux d'énergie électromagnétique, ainsi qu'à l'évaluation de ces niveaux pour l'exposition aux humains :

- FCC KDB 447498
- American National Standards Institute (C95.1 – 1992), norme de l'IEEE sur les niveaux sécuritaires d'exposition humaine aux champs électromagnétiques des radiofréquences, 3 kHz à 300 GHz.

- American National Standards Institute (C95.3 – 1992), pratique recommandée par l'IEEE pour la mesure des champs électromagnétiques potentiellement dangereux – RF et micro-ondes.

2.2.1 Directives sur l'exposition aux RF



Pour s'assurer que l'exposition à l'énergie électromagnétique des RF se situe dans les limites acceptables de la FCC pour l'utilisation professionnelle, respectez toujours les directives suivantes :

- N'utilisez PAS la radio sans qu'une antenne appropriée y soit connectée, car ceci peut endommager la radio et également causer un dépassement des limites d'exposition aux RF de la FCC. Une antenne appropriée est celle fournie par L3Harris avec cette radio, ou une antenne spécifiquement autorisée par L3Harris pour être utilisée avec cette radio. (Reportez-vous à Tableau 2-1.)
- Ne transmettez PAS pendant plus de 50 % de la durée d'utilisation totale de la radio (« cycle de service de 50 % »). La transmission pendant plus de 50 % du temps peut causer un dépassement des exigences de conformité de la FCC en matière d'exposition aux RF. La radio transmet lorsque l'indicateur « TX » apparaît sur l'affichage. La radio transmet lorsqu'on appuie sur le bouton « PTT » (bouton de microphone).
- Transmettez TOUJOURS en basse puissance lorsque possible. En plus de préserver la charge de la pile, une faible puissance réduit l'exposition aux RF. Utilisez TOUJOURS des accessoires autorisés L3Harris (antennes, piles, pinces de ceinture, haut-parleurs/micros, etc.). L'utilisation d'accessoires non autorisés peut entraîner un dépassement des exigences de conformité pour une exposition aux RF professionnelle ou contrôlée de la FCC. (Reportez-vous à Table 4-1.)
- Tel qu'indiqué dans Tableau 2-1, conservez TOUJOURS l'appareil et son antenne à **AU MOINS** 1,2 cm du corps, et à au moins 2,5 cm du visage pendant la transmission, pour vous assurer de ne pas dépasser les exigences de conformité de la FCC en matière d'exposition aux RF. Cependant, pour offrir la meilleure qualité sonore aux auditeurs de votre transmission, L3Harris recommande de tenir le microphone à au moins 5 cm (2 po) de votre bouche et légèrement déplacé sur un côté.

Tableau 2-1 : Distances de test de conformité des expositions aux RF (pire des scénarios)

RADIOFRÉQUENCES	CORPS ³	VISAGE
VHF (136 - 174 MHz)	1,2 cm	2,5 cm
UHF (378 - 522 MHz)	1,2 cm	2,5 cm
700/800 MHz (768 - 776 MHz) (798 - 806 MHz) (806 - 824 MHz) (851 - 870 MHz)	1,2 cm	2,5 cm
900 MHz (935-944 MHz) (896-902 MHz)	1,2 cm	2,5 cm
2400 MHz (2412 - 2472 MHz)	1,2 cm	2,5 cm

³ Ce est le pire des cas basée sur le corps plus mince monter accessoire (clip ceinture).

RADIOFRÉQUENCES	CORPS ³	VISAGE
5 GHz (5.18 - 5.825 GHz)	1,2 cm	2,5 cm

Dans cette section figurent les renseignements nécessaires pour sensibiliser l'utilisateur à l'exposition aux RF et sur ce qu'il faut faire pour s'assurer que cette radio fonctionne dans les limites d'exposition aux RF de la FCC.

2.2.2 Interférence/Compatibilité Électromagnétique

Pendant les transmissions, cette radio L3Harris produit de l'énergie des RF qui peut causer de l'interférence avec d'autres appareils ou systèmes. Pour éviter de telles interférences, fermez la radio dans les zones où il est indiqué de le faire. N'utilisez PAS le transmetteur dans des zones sensibles aux radiations électromagnétiques, comme les hôpitaux, les avions et les sites de détonation.

2.3 INTERFÉRENCE DES RADIOFRÉQUENCES

2.3.1 Partie 15 de la FCC

Cet appareil est conforme à la Partie 15 de la réglementation de la FCC. Le fonctionnement est soumis aux deux conditions suivantes :

1. Cet appareil ne doit pas causer une interférence nuisible; et
2. Cet appareil doit accepter toute interférence reçue, y compris une interférence qui peut causer un fonctionnement non souhaité.

2.3.2 Industrie Canada

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

2.4 CONSEILS D'UTILISATION

L'emplacement et l'état de l'antenne sont importants pour l'utilisation d'une radio portative. L'utilisation de la radio dans des zones de faible élévation, sous des lignes électriques ou des ponts, à l'intérieur d'un véhicule ou dans un immeuble à ossature métallique, peut réduire la portée de l'appareil de manière considérable. Les montagnes peuvent également réduire la portée de l'unité.

Dans les zones où la transmission ou la réception est insatisfaisante, certaines améliorations peuvent être obtenues en s'assurant que l'antenne est verticale. Se déplacer de quelques mètres dans une autre direction ou à un emplacement plus élevé peut également améliorer les communications. L'utilisation d'une antenne fixée à l'extérieur peut faciliter le fonctionnement dans un véhicule.

L'état de la pile est un autre facteur important d'une utilisation sans tracas d'une radio portative. Chargez toujours correctement la pile.

2.5 UTILISATION EFFICACE DE LA RADIO

Gardez l'antenne dans une position verticale pendant la réception ou la transmission d'un message.



Ne tenez PAS l'antenne lorsque la radio est allumée !

2.5.1 Entretien Et Remplacement De L'antenne



N'utilisez pas la radio portative si son antenne est endommagée ou absente. Une brûlure légère peut se produire au contact d'une antenne endommagée avec la peau. Remplacez immédiatement une antenne endommagée. L'utilisation d'une radio portative alors que l'antenne est absente peut causer des blessures, endommager la radio et pourrait enfreindre la réglementation de la FCC.



Utilisez seulement l'antenne fournie ou une antenne approuvée. Des antennes non autorisées, des modifications ou des ajouts à une antenne peuvent endommager la radio et enfreindre la réglementation de la FCC. (Reportez-vous à Table 4-1.)

2.5.2 Appareils Électroniques



L'énergie des RF provenant de radios portatives peut affecter certains appareils électroniques. La majorité de l'équipement électronique moderne dans les voitures, les hôpitaux, les maisons, etc. est blindé contre l'énergie des RF. Cependant, dans les zones où l'on vous demande de fermer l'équipement de radio bidirectionnelle, respectez toujours les règles. En cas de doute, éteignez-le !

2.5.3 Avion



- **Éteignez toujours une radio portative avant d'embarquer à bord d'un avion !**
- **Ne l'utilisez au sol qu'avec la permission de l'équipage.**
- **NE l'utilisez PAS durant le vol !**

2.5.4 Détonateurs Électriques



MISE EN GARDE

Pour prévenir la détonation accidentelle des détonateurs électriques, n'utilisez PAS de radios bidirectionnelles à moins de 305 m (1 000 pi) des opérations de détonation. Respectez toujours les indications « Éteindre les radios bidirectionnelles » situées là où des détonateurs électriques sont utilisés. (Norme OSHA : 1926.900)

2.5.5 Atmosphère Potentiellement Explosive



MISE EN GARDE

Les zones ayant une atmosphère potentiellement explosive sont souvent, mais pas toujours, identifiées clairement comme telles. Il peut s'agir de zones d'alimentation en carburant, comme les postes d'essence, les installations de stockage ou de transfert de carburant ou de produits chimiques, ainsi que les zones dont l'air contient des produits chimiques ou des particules, comme des grains, de la poussière ou des poudres métalliques.

Des étincelles dans de telles zones peuvent provoquer une explosion ou un incendie, causant ainsi des blessures ou même la mort.

Éteignez les radios bidirectionnelles dans toute zone ayant une atmosphère potentiellement explosive. Il est rare, mais pas impossible qu'une radio ou ses accessoires produisent des étincelles.

3. CLASS I, DIVISION 2 OPTION

Refer to Battery Guide 14221-1800-2030 for Accessory Kit 14035-9800 which communicates to the end user which battery is required to maintain UL CID2.

Radios ordered with the Class I, Division 2 option are suitable for use in Class I, Division 2, Groups A, B, C, and D or non-hazardous (unclassified) locations only.

Les radios commandées avec l'option Classe I, Division 2 sont adéquates pour utilisation en Classe I, Division 2, Groupes A, B, C et D, ou en lieux non-hasardeux (non-classifiés) seulement



EXPLOSION HAZARD – REPLACE BATTERY PACK ONLY IN AN AREA KNOWN TO BE NON-HAZARDOUS, AND ONLY WITH THE L3HARRIS PART NO. REFERENCED IN BATTERY GUIDE 14221-1800-2030.

AVERTISSEMENT – RISQUE D'EXPLOSION – LES BATTERIES NE DOIVENT ÊTRE REMPLACÉES QUE DANS UNE ZONE NON DANGEREUSE RECONNUE, ET UNIQUEMENT AVEC UNE BATTERIE L3HARRIS DONT LE NUMÉRO DE PIÈCE EST RÉFÉRENCÉ DANS LE GUIDE DES BATTERIES, 14221-1800-2030.



EXPLOSION HAZARD – Substitution of any component may impair suitability for Class I, Division 2.

AVERTISSEMENT – RISQUE D'EXPLOSION – Une substitution de toute composante pourrait compromettre la convenance pour la Classe I, Division 2.



EXPLOSION HAZARD – Do not exceed maximum battery charging current of 5.250 A or maximum charging voltage of 12.0 V DC at any time.



CAUTION - The battery used in this device may present a risk of fire or explosion when heated above 100°C (212°F) or incinerated⁴. Replace battery with the L3Harris Part No. referenced in battery guide 14221-1800-2030 only. Use of another battery may present a risk of fire or explosion.

Battery replacement instructions: Remove battery by 1) depressing battery latches then 2) remove battery from radio chassis. Install replacement battery by inserting battery in radio chassis opening and depressing battery into chassis until both battery latches are engaged. Dispose of a used battery promptly. Keep away from children. Do not disassemble and do not dispose of in fire.

⁴ Battery meets all temperature rating requirements of NFPA1802.

**WARNING**

EXPLOSION HAZARD – In addition to any simple single-ended coil antenna and carrying case option, only the following L3Harris accessories may be used with this radio:

3.1 CLASS I, DIVISION 2 ACCESSORIES

PART NUMBER	DESCRIPTION	NFPA
14100-4700-22	Speaker Microphone, Green, Straight Cable	N/A
14100-4700-25	Speaker Microphone, XL, Black, Straight Cable	N/A
14100-4700-71	Speaker Microphone, NFPA 1802, Green Cable and Dongle	NFPA
14100-4700-72	Speaker Microphone, NFPA 1802, Black Cable and Dongle	NFPA
14100-4700-73	Speaker Microphone, NFPA 1802, Yellow Cable and Dongle	NFPA
14100-4700-81	Speaker Microphone, NFPA 1802, Green Straight Cable -16	NFPA
14100-4700-82	Speaker Microphone, NFPA 1802, Black Straight Cable -16	NFPA
14100-4700-83	Speaker Microphone, NFPA 1802, Yellow Straight Cable -16	NFPA
14100-4700-91	Speaker Microphone, Green Straight Cable -15	N/A
14100-4700-92	Speaker Microphone, Black Straight Cable -15	N/A
14035-4750-01	Speaker Microphone, 500F	N/A
12082-0600-01	Speaker Microphone	N/A
14035-4700-01	Speaker Microphone, REVO NC2, C1D2	N/A
12082-0600-02	Speaker Microphone, Emergency Button	N/A
12082-0684-01	Bluetooth, Covert, Earpiece/Mic/PTT	N/A
12082-0800-02	Speaker Microphone, Wireless, Bluetooth, Advanced	N/A
12082-0800-03	Speaker Microphone, Wireless, Bluetooth, Advanced, ANZ	N/A
12082-0650-01	Microphone, Palm,2 Wire, Black	N/A
12082-0650-03	Microphone, Mini-Lapel,3 Wire, Black	N/A
LS103239V1	Earphone, Lapel Microphone	N/A
LS103239V2	Earphone, Speaker Microphone, Right Angle, 2.5 mm	N/A
12082-0600-03	Microphone, Antenna Speaker, Emrg,18 In	N/A
12082-0600-04	Microphone, Antenna Speaker, Emrg,25.6 In	N/A
12082-0600-05	Microphone, Antenna Speaker, Emrg,30 In	N/A
12082-0650-17	Skull Microphone, with Body PTT and Earcup	N/A
12082-0650-18	Throat Microphone, with Acoustic Tube and Body PTT	N/A
12082-0650-19	Throat Microphone, with Acoustic Tube, Body and Ring PTT	N/A
12082-0650-13	Headset, Heavy Duty, Behind the Head, with PTT	N/A
12082-0650-14	Headset, Heavy Duty, Over the Head, with PTT	N/A
12082-0650-08	Headset, Light Weight, Over the Head, Single Ear, In-Line PTT	N/A
12082-0650-09	Headset, Light Weight, Behind the Head, Dual Ear, In-Line PTT	N/A
12082-0650-10	Headset, Light Weight, Behind the Head, Dual Ear, Pigtail PTT	N/A
12082-0650-11	Headset, Light Weight, Behind the Head, Dual In-Ear, In-Line PTT	N/A
12082-0650-12	Headset, Light Weight, Behind the Head, Dual In-Ear, Pigtail PTT	N/A

3.2 INTRINSICALLY SAFE DEVICE ENTITY PARAMETERS

- Intrinsically Safe Device Entity Parameters:
 - V_{max} (or U_i) = 8 V dc
 - I_{max} (or I_i) = 500 mA
 - P_{max} (or P_i) = 4 W
 - C_i = 69 μ F
 - L_i = 320 μ H
- Associated apparatus output current must be limited by a resistor such that the output voltage-current plot is a straight line drawn between open-circuit voltage and short-circuit current.
- Associated apparatus may be in a Division 2 or Zone 2 location if so approved.
- Selected associated apparatus must be third-party listed as providing intrinsically safe circuits for the application, and have V_{oc} or V_t not exceeding V_{max} (or U_o not exceeding U_i), I_{sc} or I_t not exceeding I_{max} (or I_o not exceeding I_i), and the P_o of the associated apparatus must be less than or equal to the P_{max} or P_i of the intrinsically safe equipment, as shown in Table 3-1.
- Capacitance and inductance of the field wiring from the intrinsically safe equipment to the associated apparatus shall be calculated and must be included in the system calculations as shown in Table 3-1. Cable capacitance, C_{cable} , plus intrinsically safe equipment capacitance, C_i , must be less than the marked capacitance, C_a (or C_o), shown on any associated apparatus used. The same applies for inductance (L_{cable} , L_i and L_a or L_o , respectively). Where the cable capacitance and inductance per foot are not known, the following values shall be used: $C_{cable} = 60$ pF/ft., $L_{cable} = 0.2$ μ H/ft.

Table 3-1: I.S. Equipment and Associated Apparatus

<u>I.S. EQUIPMENT</u>		<u>ASSOCIATED APPARATUS</u>
V_{max} (or U_i)	\geq	V_{oc} or V_t (or U_o)
I_{max} (or I_i)	\geq	I_{sc} or I_t (or I_o)
P_{max} (or P_i)	\geq	P_o
$C_i + C_{cable}$	\leq	C_a (or C_o)
$L_i + L_{cable}$	\leq	L_a (or L_o)

If P_o of the associated apparatus is not known, it can be calculated using the formula $P_o = (V_{oc} * I_{sc})/4 = (U_o * I_o)/4$.

- Associated apparatus must be installed in accordance with its manufacturer's control drawing and Article 504 of the National Electrical Code (ANSI/NFPA 70) for installation in the United States, or Section 18 of the Canadian Electrical Code (C22.1) for installations in Canada.
- When required by the manufacturer's control drawing, the associated apparatus must be connected to a suitable ground electrode per the National Electrical Code (ANSI/NFPA 70), the Canadian Electrical Code, or other local installation codes, as applicable. The resistance of the ground path must be less than 1 ohm.
- Associated apparatus must not be used in combination unless permitted by the associated apparatus certification.



EXPLOSION HAZARD / AVERTISSEMENT - RISQUE D'EXPLOSION

- Substitution of components may impair intrinsic safety / La substitution des composants peut nuire à la sécurité intrinsèque.
- To prevent ignition of flammable or combustible atmospheres, disconnect power before servicing / Pour éviter l'inflammation d'atmosphères inflammables ou combustibles, débranchez l'alimentation avant l'entretien.
- To reduce the risk of explosion, do not mix new batteries with used batteries, or mix batteries from different manufacturers / Pour réduire le risque d'explosion, ne mélangez pas de piles neuves avec des piles usages, or mélangez des piles de différents fabricants.

4. INTRODUCTION

4.1 DESCRIPTION

XL Extreme™ Series portable radios provide the advanced connectivity that first responders require while addressing evolving voice and data communications. They meet MIL-STD-810G for durability and are certified to more stringent MIL-STD parameters for contamination by fluids and explosive atmospheres. XL Extreme Series Portable radios support P25 Trunking, P25 Conventional, Enhanced Digital Access Communications System (EDACS®), analog conventional, and XL-Virtual™/BeOn® operation over a Wi-Fi® or LTE network. For all radio specifications, refer to radio data sheet, available online at <https://www.l3harris.com/all-capabilities/xl-extreme-400p-portable-radio>.



Australia restricts WLAN band 5250-5350 MHz to indoor use only.
Band 4920-5150 MHz is prohibited for use in Australia.



ISED restricts 5150-5250 MHz to indoor use only.



Ensure that all SIM cards are Industrial grade rated (temperature rating of 105°C or higher).



EDACS operation is not supported in UHF or VHF.
Refer to the *Configuration and Use Feature Manual* 14221-7200-6130 for details on configuring and using XL-Virtual/BeOn on XL Extreme Series Portable Radios.

The XL Extreme Series Portable Radio is a P25 converged, *multiband* Land Mobile Radio. Designed for anyone who needs to communicate with multiple agencies or across multiple bands, the XL Extreme Series Portable Radio delivers mission-critical connectivity.

Radio features include:

- Extremely Rugged – Exceeds the standards of other radios on the market.
- Multiband Operation – Supports any combination of VHF, UHF, and 700/800 MHz frequencies. Also allows different bands to be enabled for selected users.
- Single-key DES Encryption – Provides basic secure communications without having to buy the complete encryption option.
- Instant Recall of Received Audio – Allows user to replay the last transmission received to avoid unnecessary repetition.
- Noise Cancellation – With three internal microphones to transmit intelligible audio from users in loud environments.
- Built-in GPS – For location reporting and rapid response for emergencies.

- Integrated Bluetooth® – For wireless interface to selected accessories.
- Wi-Fi Connectivity – Permits simple and easy radio software and personality updates.
- Wi-Fi Access Point – Radios that include the LTE option can be configured via RPM2 to act as a Wi-Fi access point and/or router, providing access to broadband data for Wi-Fi devices.
- Covert Mode – Allows users to quickly configure the radio for operation in a covert environment.
- Fully Programmable Keypad – Each key can be programmed to a variety of functions.
- Four-position switch – Provides added configuration flexibility.

Refer to Table 4-1 for the list of options and accessories. Additional accessories may have been added since publication of this manual; contact L3Harris for more information.

4.2 RADIO MODELS

This manual provides operating instructions for the following radio models:

MODEL NUMBER	DESCRIPTION
XF-PFM1P-NA	Portable, XL-400P, XTRMKP, PGRN,NA
XF-PFM1M-NA	Portable, XL-400P, XTRMKP, BLK, NA
XF-PFM1M-INTL	Portable, XL-400P, XTRMKP, BLK, INTL
XF-PFM1P-INTL	Portable, XL-400P, XTRMKP, PGRN, INTL

4.3 STORAGE GUIDELINES

Store your radio and batteries in a clean, cool [not exceeding 86 °F (+30 °C)], dry, and ventilated storage area.

4.4 BASIC SETUP

4.4.1 Assemble the Radio



Only use an L3Harris charger approved for the battery chemistry. Injury could occur from improper charger use.



Do not over-tighten the antenna as damage could result. Torque should not exceed 20 in. lbs. This torque is measured at a grip point one inch above the antenna's base.



Fully charge the battery before first use. Due to government regulations, batteries ship in a discharged state and may require up to two (2) minutes in a charger for successful initialization. During initialization, the charger does not show any charge indication. After this initialization period, charging resumes normally.



Battery packs shipped in shutdown mode (i.e., 14100-4000-07, RevA) require waking before use. To wake a battery pack, place it in the charger (with or without radio attached; radio on or off) for less than one minute.

1. Make sure batteries are charged per the manual supplied with the charger.
2. To attach optional belt clip, remove the existing tab from the back of the radio above the battery compartment. Slide the belt clip into the groove.
3. Lift clip, if installed, and slide top of battery into top of battery compartment at the rear of the radio.
4. Press down on bottom side of battery until it snaps into place.

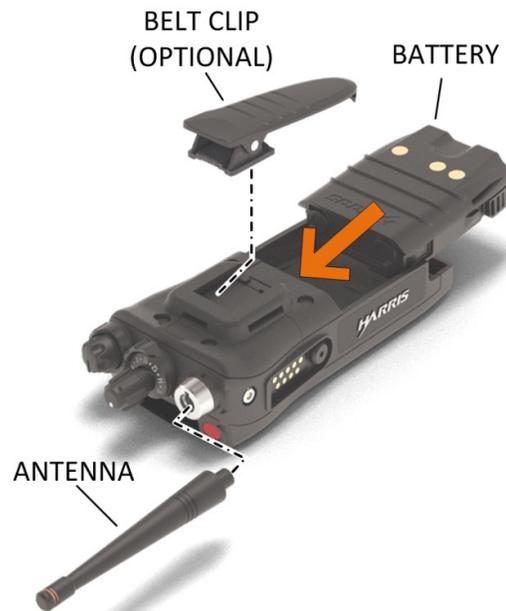


Figure 4-1: Radio Assembly

4.4.2 Removing the Battery

To remove, press and hold the two tabs at the bottom of the battery and then pull battery up and out of the radio.



Although the XL Extreme Portable has been designed to tolerate changing the battery pack without turning power off, L3Harris recommends turning the radio off before changing battery packs to ensure safety and best/proper operation.



Figure 4-2: Remove the Battery

4.4.3 Removing the Optional Belt Clip or D-Post

Remove the battery before removing the belt clip or D-Post. To remove the belt clip, pry up on the metal spring towards the top of the battery compartment using a flat head screwdriver and slide the belt clip or D-Post out of the groove in the back of the radio.

4.5 UNIVERSAL DEVICE CONNECTOR

The Universal Device Connector (UDC) provides connections for external accessories such as a headset, a speaker-microphone, audio test box, audio test cables, and programming cables. The UDC is located on the right side of the radio, opposite the PTT Button. The UDC facilitates programming and testing the radio. The UDC pins perform different functions depending on the accessory attached to the UDC.



Figure 4-3: Universal Device Connector

4.6 CLEANING

Keep the exterior of the radio, battery, antenna, and radio accessories clean.

Periodically clean the radio using the following procedure:

1. To remove dust and dirt, clean using damp clean cloth (warm water and mild detergent soap).
2. Follow by wiping with damp (warm water) clean cloth. Wipe dry with clean cloth.
3. Remove the battery and wipe the battery and radio contacts using a soft dry cloth to remove dirt or grease. This will ensure efficient power transfer from the battery to the radio.
4. Remove any accessories and clean the UDC contacts using a clean dry cloth. When the UDC is not in use, cover the connector with the protective dust cap to prevent the build-up of dust or water particles.
5. If the radio is used in a harsh environment (such as driving rain, salt fog, etc.), it may be necessary to periodically dry and clean the battery and radio contacts with a soft dry cloth or soft-bristle non-metallic brush.



Do not use chemical cleaners, spray, or petroleum-based products. They may damage the radio housing.



NOTE

To clean the speaker and microphone areas of the radio, carefully wipe these areas, preventing the soap from entering the speaker or microphone openings.

4.7 OPTIONS AND ACCESSORIES

Only use L3Harris approved accessories. Refer to L3Harris' Product and Services catalog for the complete list of options and accessories available. Contact L3Harris for requirements not contained in this list:



CAUTION

Always use the correct options and accessories (battery, antenna, speaker/mic, etc.) for the radio. Immersion rated options must be used with an immersion rated radio. Refer to Table 4-1.



CAUTION

Refer to Section 3 for radios with the C1D2 option.



NOTE

Battery packs shipped in shutdown mode (i.e., 14100-4000-07, Rev. A) require waking before use. To wake a battery pack, place it in the charger (with or without radio attached; radio on or off) for less than one minute.

Table 4-1: Options and Accessories

DESCRIPTION	PART NUMBER	OPTION NUMBER
ANTENNAS		
Flex, Helical, XTRM, 136-870 MHz	14100-4300-01	XF-AN9F
BATTERIES/CHARGERS		
Battery, Li-Ion, LTE ⁵	14100-4000-07	XF-PA4N
Charger, 1-BAY	14100-4600-01	XF-CH6A
Charger, Desktop, Two-Bay, Li-Battery	14035-4310-02	XF-CH6F
AUDIO ACCESSORIES		
Speaker Microphone, 500F	14035-4750-01	XF-AE2W
Speaker Microphone	12082-0600-01	XF-AE9N
Speaker Microphone, REVO NC2, C1D2	14035-4700-01	XF-AE2V
Speaker Microphone, Emergency Button	12082-0600-02	XF-AE4B
Bluetooth, Covert, Earpiece/Mic/PTT	12082-0684-01	XF-AE1S
Speaker Microphone, Wireless, Bluetooth, Advanced	12082-0800-02	XF-AE1V
Speaker Microphone, Wireless, Bluetooth, Advanced, ANZ	12082-0800-03	XF-AE2T
Microphone, Palm,2 Wire, Black	12082-0650-01	XF-AE6G
Microphone, Mini-Lapel,3 Wire, Black	12082-0650-03	XF-AE6H
Earphone, Lapel Microphone	LS103239V1	XF-AE3Z
Earphone, Speaker Microphone, Right Angle, 2.5 mm	LS103239V2	XF-AE1K
Microphone, Antenna Speaker, Emrg,18 In	12082-0600-03	XF-AE2K
Microphone, Antenna Speaker, Emrg,25.6 In	12082-0600-04	XF-AE2J
Microphone, Antenna Speaker, Emrg,30 In	12082-0600-05	XF-AE2L
Skull Microphone, with Body PTT and Earcup	12082-0650-17	XF-AE1L
Throat Microphone, with Acoustic Tube and Body PTT	12082-0650-18	XF-AE1M
Throat Microphone, with Acoustic Tube, Body and Ring PTT	12082-0650-19	XF-AE1N

⁵ When the battery is fully charged, the radio will operate continuously for eight (8) hours on a standard duty cycle of 10-10-80 at maximum rated transmit power.

DESCRIPTION	PART NUMBER	OPTION NUMBER
Headset, Heavy Duty, Behind the Head, with PTT	12082-0650-13	XF-AE1P
Headset, Heavy Duty, Over the Head, with PTT	12082-0650-14	XF-AE1R
Headset, Light Weight, Over the Head, Single Ear, In-Line PTT	12082-0650-08	XF-AE2B
Headset, Light Weight, Behind the Head, Dual Ear, In-Line PTT	12082-0650-09	XF-AE2C
Headset, Light Weight, Behind the Head, Dual Ear, Pigtail PTT	12082-0650-10	XF-AE2D
Headset, Light Weight, Behind the Head, Dual In-Ear, In-Line PTT	12082-0650-11	XF-AE2E
Headset, Light Weight, Behind the Head, Dual In-Ear, Pigtail PTT	12082-0650-12	XF-AE2F
MISCELLANEOUS ACCESSORIES		
Adapter, 6-Pin Hirose, Ext Cable	14002-0197-01	XF-CJ4B
Metal Belt Clip, 0mm	12082-1290-01	XF-HC3L
D-Swivel	12082-3230-01	

4.8 RELATED PUBLICATIONS

The following publications contain additional information about the radio and related products:

MANUAL NUMBER	DESCRIPTION
14221-1800-2060	Radio Product Safety Manual
14221-1800-1010	Quick Guide
14221-1800-5030	Radio Maintenance Manual
14221-7200-6110	Voice Annunciation Feature Manual
14221-2100-3000	Advanced Access Control/Radio Personality Manager Overview Manual
14221-1100-8170	Radio Personality Manager 2 (RPM2) Software Release Notes
14221-1100-2060	RPM2 User's Manual
14221-7200-6130	XL-Virtual/BeOn Configuration and Use Feature Manual
14221-1800-8010	XLP Radio Software Release Notes
14221-2100-2010	L3Harris Device Management User's Manual
14221-2100-8030	L3Harris Device Management Software Release Notes.
14221-1800-6000	XL Extreme Speaker Microphone Product Manual
14221-1600-2150	Single-Bay Desktop Charger Operator's Manual
14221-1600-2110	XL Extreme Vehicular Charger Operator's Manual
14221-1600-2120	XL Extreme Six Bay Li-ion/Polymer Battery Charger Operator's Manual
14221-1600-2130	XL Extreme Two-Bay Desktop Charger Operator's Manual
14221-1800-2030	Battery Guide

The product safety manual and the quick guide are included with the radio equipment package when the radio ships from the factory. All publications listed above are available at <https://premier.pspc.harris.com/> via an Information Center login and Tech Link.

5. BASIC OPERATION

5.1 RADIO CONTROLS



Figure 5-1: Radio Controls



Figure 5-2: XL Extreme Speaker Microphone Controls



For more information on using the Fire Remote Speaker Microphone, refer to *Product Manual 14221-1800-6000*.



Table 5-1 describes the default functions of buttons, knobs, and controls. Most can be programmed for different functions; see Section 7.5 for more information.

Table 5-1: Radio Controls, Indicators, and Connectors

CONTROL/INDICATOR	FUNCTION
Group/Channel Knob	Selects groups/channels.
Power/Volume Knob	Turn clockwise to power on radio and increase volume of audio heard from speaker. Minimum volume levels may be programmed into the radio to prevent missed calls due to a low volume setting.
A/B (Ø/O) Switch	User-programmable switch (see Section 7.5.2).
Ambient Temperature Sensor	Detects high temperature.
Microphone (Secondary)	When noise cancellation is enabled, the secondary and primary microphones are used together to form a dual microphone system. Noise cancellation improves the quality of transmitted voice. When noise cancellation is disabled, only the primary microphone is used. See Section 5.17 for detailed information on using noise cancellation.

CONTROL/INDICATOR	FUNCTION
A/B/C/D Switch	User-programmable switch. By default, selects one of four channel banks (see Section 5.12).
User-Programmable Buttons	Used to select a commonly used function as an alternative to navigating menus. This is configured via programming using Radio Personality Manager 2 (RPM2). See Section 7.5.1 for the options that can be programmed to these buttons.
Push-To-Talk (PTT) Button	Press to transmit. Make sure Push-To-Talk (PTT) is enabled (Section 6.5).
Battery	Battery - Refer to Section 4.4 for battery connection and removal.
Antenna Connector	Antenna connector.
Emergency Button	Used to place radio in emergency mode (see Section 5.33). This button can be disabled via programming using RPM2. In addition, this button can be used in conjunction with a User-Programmable Button to clear emergencies if configured to do so.
Indicator Light Emitting Diode (LED)	Indicates radio status: <ul style="list-style-type: none"> • Red = actively transmitting. • Green = actively receiving. • Orange = actively transmitting encrypted.
Top Display	Shows summary of radio operation, including channel/talkgroup (which can be color coded), as well as a variety of programmable icons. Display orientation can be configured for viewing from the front or rear of the radio. (Section 6.6).
Speaker	Radio speaker which can be muted (Section 6.5). Adjust volume using the Power/Volume knob.
Microphone (Primary)	When noise cancellation is enabled, the primary and secondary microphones are used together to form a dual microphone system. Noise cancellation improves the quality of transmitted voice. When noise cancellation is disabled, only the primary microphone is used. See Section 5.8 for detailed information on using noise cancellation.
Front Display	Front display shows complete status and radio menus.
User-Programmable Soft Keys	User-programmable dynamic keys that have their current function labeled on the radio display directly above each button. See Section 7.5.1 for the options that can be programmed to these buttons.
Menu/Select Button	From the Main Display, press this button to access the menu. Also, selects highlighted menu items.
Navigation Buttons	Navigates menu items. In addition: <ul style="list-style-type: none"> • Press the left navigation button while on the idle display to access Channel Information (see Section 6.4). By default, this feature is disabled by RPM2. • Press the down navigation button while on the idle display to display the functions assigned to programmable buttons (see Section 7.5). • Press the up navigation button to display Missed Call info. • Press the right navigation button to end or reject an I-Call.
Keypad	By default, used to enter text or numbers. Can be programmed for various functions (see Section 7.5).

5.2 BEFORE FIRST USE

Make sure the radio has:

- Fully charged battery
- Antenna attached
- Personality and radio programmed using RPM2
- Encryption keys loaded if using encrypted channels
- Personality activated

5.3 POWER ON AND SET VOLUME

The power switch and volume control are the same knob on top of the radio (see Figure 5-1). Turn the Power/Volume Knob clockwise to power on radio and increase the volume. The radio can be programmed to play an audible tone when changing the volume.



A minimum volume level can be programmed into the radio to prevent missed calls due to a low volume setting. Rated audio is 1.5 W at volume 12.



The radio can be programmed to require the entry of a PIN to operate the radio. Check with your System Administrator if you forget your PIN. As the PIN is entered, an asterisk is displayed for each digit; the actual value is not displayed.

5.4 VIDA ID

VIDA ID provides the capability to provision the VIDA User Personality configured in the UAS to radios operating on P25 networks via a User Login. Each personality can contain up to 16 profiles and each profile can contain up to sixteen Talk Groups. Refer to Section 10.1 for a list of potential login and provisioning error messages and what to do if they occur.

5.4.1 User Login

User Login enables multiple radio users to pick a radio from a fleet pool and enter unique credentials to log into the P25 system. Upon successful login, the Alias associated with the radio user is displayed at various end points in the P25 system.

A user can login on up to three (3) devices simultaneously. For example, if the “same user” is logged into a portable radio and mobile radio, the P25 system can differentiate the subscribers while transparently displaying the alias to other users.

Login can be initiated by a menu option, a button programmed for user login, or by selecting a P25 system that requires login. To login manually:

1. From the **UTILITY** radio menu, select **USER LOGIN**, or press the button programmed for User Login.
2. Enter the **System ID**, **User ID**, and **Password**, as required.
3. Select **Login**.

5.4.2 Provisioning

If provisioning is enabled via radio programming and the user has successfully logged in, the VIDA User Personality configured in the UAS is provisioned to the radio. When no VIDA Provisioned database is available, the radio will operate using the RPM2-programmed personality.

5.5 RADIO DISPLAYS

5.5.1 Top Display

The top display (Figure 5-3) shows a summary of status, such as channel number/bank, channel short name, battery, scanning, and emergency mode. The display can be configured for viewing from the front or rear of the radio (see Section 6.6). The channel short name is programmed using RPM2.

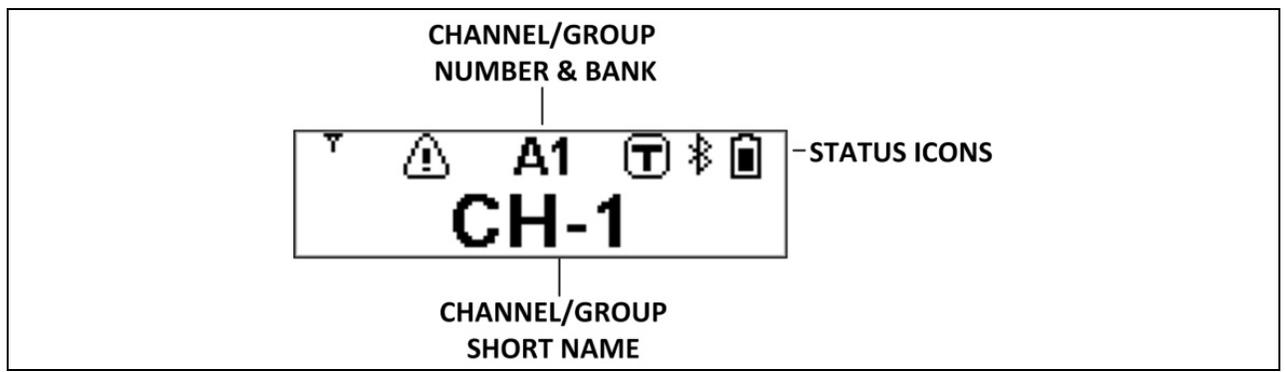


Figure 5-3: Top Display

The radio can be programmed to change the color of the top display backlight relative to the currently selected channel/group.

The top display backlight is Orange when actively receiving an emergency unless the backlight is off, either directly or via covert or stealth emergency configuration. This applies to an emergency condition in all modes of operation (P25, MDC, etc.).

The display backlight is Green when the radio is operating in RF Safe Mode (100 mW transmit power) unless the backlight is off, either directly or via covert configuration. Therefore, it is recommended that you do not use Green as talkgroup/channel color when the radio is configured to allow RF Safe Mode operation.

During an emergency, the emergency backlight color supersedes the RF Safe Mode color and any programmed talkgroup/channel color. After the emergency is cleared, the original backlight color (if any) is restored.

In RF Safe Mode, the RF Safe Mode backlight color supersedes any programmed talkgroup/channel color. The emergency backlight color supersedes the RF Safe Mode color. When the radio is no longer in RF Safe Mode, the original backlight color (if any) is restored.

5.5.2 Front Display

Figure 5-4 shows a sample front display while on the idle screen. The idle screen appears after power up or after exiting from the menus.



Figure 5-4: Sample Idle Front Display



The radio can be programmed to display the User ID on the System line of the display.

Table 5-2 describes some of the icons that may be displayed by the radio. The radio menu also contains an icon glossary in the Utility Menu (see Section 5.8). Icons and their location can be customized using RPM2.

Table 5-2: Radio Icons⁶

ICON	DESCRIPTION	ICON	DESCRIPTION	ICON	DESCRIPTION
	Analog Conventional System		P25 Conventional System		P25 Trunked System
	EDACS System		Zone		User Defined Zone
	(Blue) Trunked Signal Strength		Bluetooth Enabled		Monitor On
	(Red) TX Power		(Blue) Bluetooth Connected		VDOC
	(Green) Receive Signal Strength		Encryption Enabled		Receiving Data
	(No Color) Channel Idle		Global Encryption		Transmitting Data
	(Orange) Transmitting Encrypted		OTAR Disabled		Alert(s) Present
	Battery Fully Charged		OTAR Registered		Vote Scanning
	Battery Level 100% Capacity		OTAR Registering		Scanning Enabled
	Battery Level 75% Capacity		OTAR Rekeying		Emergency
	Battery Level 50% Capacity		Transmit Power Level High		RX Mail
	Battery Level 25% Capacity		Transmit Power Level Low		Noise Cancellation Enabled
	Battery Level 5% Capacity (Low Battery Audio Indicator)		Transmit Power Level RF Safe		Fire Speaker Mic Attached ⁷
	Battery Level Battery Exhausted (RX-Only State)		RX Only		Nuisance Channel
	Battery Charging		Speaker Muted		Conventional Site Unregistered
	Talkaround Enabled		TX Disabled		Conventional Site Registered

⁶ Refer to earlier revisions of this manual for the icons used in previous XLP releases.

⁷ For the Fire Speaker Mic Attached icon to display, first the Noise Cancellation icon must be programmed to the radio's front display via RPM2. When you attach the Fire Speaker Microphone (FSM) to the radio and Noise Cancellation is enabled, then the Fire Speaker Mic Attached icon is displayed, replacing the Noise Cancellation icon. This indicates that Noise Cancellation is now being used from the FSM rather than the radio.

ICON	DESCRIPTION	ICON	DESCRIPTION	ICON	DESCRIPTION
	Failsoft		Tones Disabled		Type 99 Enabled
	Wi-Fi Signal Strength Indicator		PTT Disabled		GPS Tracking
	Wi-Fi Network Currently Connected		Wi-Fi Network in Process of Connecting		Wi-Fi Clients Connected
	Add New Wi-Fi Client		Mandown		Cellular – Registered Home
	Cellular – Registered Foreign Network		A wearable Bluetooth device is attached [e.g., Self-Contained Breathing Apparatus (SCBA)]		Cellular Sub-Menu Icon
	Cellular – Denied or Unknown Registration Status				

5.6 MANDOWN

If enabled via radio programming, the following conditions can be configured to trigger a Mandown condition:

- MOTION - Mandown is declared with lack of motion.
- TILT - Mandown is declared when the radio is tilted.
- BOTH - Mandown is declared by radio tilting and lack of motion.

This can be useful if, for example, a radio user is in danger and has not moved for a certain amount of time. If the user’s movement falls below the configured level, then a tone begins playing. An Emergency is declared on the channel/group based on the radio’s Emergency configuration.

5.7 STATUS MESSAGES

The radio may display various radio Status Messages during operation. These messages are described in Table 5-3.

Table 5-3: Status Messages

MESSAGE	DESCRIPTION
PTT DENIED	P25 Trunked and EDACS - The radio or talkgroup is not authorized to operate on the selected system and/or talkgroup.
CALL QUEUED	P25 Trunked and EDACS - The system has placed the call in a request queue.
SYSTEM BUSY	P25 Trunked and EDACS - The system is busy, no channels are currently available, the queue is full, or an individual call is being attempted to a radio that is currently transmitting.
SCANNING	The radio is scanning.
TX EMERGENCY	An emergency call is being transmitted.
RX EMERGENCY	An emergency call is being received. The radio displays the unit name or unit ID.
WIDE AREA SCAN	P25 Trunked and EDACS - The radio has entered the Wide Area Scan mode to search for a new system.
INVALID TALKGROUP	P25 Trunked and EDACS - The current talkgroup is not valid for the current system. This could happen if the site denies registration due to an unrecognized talkgroup ID.
INVALID UNIT	P25 Trunked and EDACS - The current unit is not valid for the current system.
REGISTERING	P25 Trunked only - Displayed when the radio is performing a registration/affiliation on a P25 trunking site.

MESSAGE	DESCRIPTION
CTRL CHANNEL SCAN	P25 Trunked and EDACS - The control channel is lost and the radio has entered the Control Channel Scan mode to search for the control channel (usually out of range indication).
BAND SCANNING	P25 Trunked - Only displayed if the system is configured for "EnhancedCC" mode of operation. When the radio cannot find a Control Channel in either the trunked frequency set or the list of discovered adjacencies, the radio can perform a full spectrum frequency scan to find a new Control Channel.
MISSED CALL	P25 Modes and EDACS - Another user has tried to call or page this radio. The user can view who the caller was by pressing the up navigation button.
OTAR REKEY COMPLETE	OTAR Rekey operation completed successfully.
USER REGISTRATION FAILED	User Login failed. Change selected system/zone or re-enter credentials.

5.8 PREDEFINED MENU LAYOUTS

Depending on radio programming, some menu options described in this manual may not be available. The radio supports three predefined menu layouts: Full, Custom, and Restricted. Table 5-4 details what is available in each layout:



The Custom predefined menu layout allows the administrator to customize the list of menu items that are available to the radio user. Table 5-4 lists the default settings.

Table 5-4: Predefined Menu Layouts

MENU	FULL	CUSTOM (Default Settings)	RESTRICTED
Call Menu	Yes	Yes	Yes
Active Emergency Display	Yes	Yes	Yes
Exit Emergency	Yes	Yes	Yes
Talkaround	Yes	Yes	Yes
Individual Call	Yes	Yes	Yes
Change Talkgroup	Yes	Yes	Yes
Call Alert/Page	Yes	Yes	Yes
Channel Guard	Yes	Yes	Yes
Audio Playback	Yes	Yes	No
Tone Encode	Yes	Yes	Yes
T99	Yes	Yes	Yes
Emergency Timer	Yes	Yes	No
Audio Settings	Yes	No	No
Display Settings	Yes	Yes	Yes
GPS Settings	Yes	No	No
Clock Settings	Yes	Yes	No
Bluetooth Settings	Yes	Yes	No
Scan Menu	Yes	Yes	Yes
Enable/Disable Scan	Yes	Yes	Yes
View Scan List	Yes	Yes	No
Edit Zone Scan List	Yes	No	No
View Custom Channels	Yes	Yes	No

MENU	FULL	CUSTOM (Default Settings)	RESTRICTED
Edit Custom Scan List	Yes	No	No
Custom Scan	Yes	Yes	No
Site Roam	Yes	Yes	No
Site Alias	Yes	Yes	No
Security Menu	Yes	Yes	Yes
Encryption Enable	Yes	Yes	Yes
Zeroize	Yes	No	No
Global CKR Enable	Yes	No	No
GCKR Key Select	Yes	No	No
Active Key Set	Yes	Yes	Yes
Key List	Yes	Yes	No
OTAR Enable	Yes	Yes	No
OTAR Rekey	Yes	Yes	Yes
KVL Mode	Yes	Yes	Yes
KVL Mode LLA	Yes	Yes	Yes
Message Menu	Yes	Yes	Yes
Radio Status	Yes	Yes	No
Radio Message	Yes	Yes	No
Textlink Messages	Yes	Yes	No
Textlink Forms	Yes	Yes	No
Textlink Mailbox	Yes	Yes	No
Faults	Yes	Yes	Yes
Program Menu	Yes	Yes	No
Activate Plan	Yes	Yes	No
Activate Profile	Yes	Yes	No
Maintenance Menu	Yes	Yes	Yes
Radio Info	Yes	Yes	No
Reset Overtemp Event	Yes	Yes	Yes
Battery	Yes	Yes	No
TCXO Tuning	Yes	No	No
P25 Tests	Yes	No	No
RSSI Display	Yes	Yes	Yes
Phase II Display	Yes	Yes	No
Feature Info	Yes	Yes	No
WiFi Client	Yes	Yes	No
WiFi Access Point	Yes	Yes	Yes
Change Language	Yes	No	No
Change PIN	Yes	Yes	Yes
LTE	Yes	Yes	No
Icon Glossary	Yes	Yes	Yes
User Login	Yes	Yes	Yes
System ID	Yes	Yes	Yes
Unit ID	Yes	Yes	Yes
Password	Yes	Yes	Yes
Device Management	Yes	Yes	Yes

MENU	FULL	CUSTOM (Default Settings)	RESTRICTED
Stealth Mode Settings	Yes	No	No
LCD Enabled	Yes	No	No
LED Enabled	Yes	No	No
Backlight Enabled	Yes	No	No
Side/Alert Tones Enabled	Yes	No	No
Mobile Main Audio Path Enabled	Yes	No	No
Voice Annunciation Enabled	Yes	No	No
Channel/Group Knob Enabled	Yes	No	No
Top Display Enabled	Yes	No	No
Top Display Minimum Brightness	Yes	No	No
Install GPP Software x	Yes	Yes	Yes
Zone	Yes	Yes	No

5.9 MENU

Press the Menu/Select button while on the idle display to access the menu. Press the left or right navigation buttons to scroll through the top-level menus and press the up or down navigation buttons to scroll through the sub-menus. Refer to Figure 5-1 for button location. While in a menu, press the Menu/Select button to choose, activate, or toggle the selected item; similar to an enter key. Table 5-5 provides a high-level overview of the menu layout. Menu options on your radio may vary depending on available features and radio programming.

Table 5-5: Menu Navigation

MENUS	DESCRIPTION
CALL MENU:	
ACTIVE EMERG DISPLAY	Allows the radio user to see the units currently in emergency (up to 20) on the radio display.
EXIT EMERGENCY MODE	Exits emergency. See Section 5.33 for more information.
TALKAROUND MODE	Enable/disable talkaround. See Section 5.23 for more information.
INDIVIDUAL CALL	Allows you to select an individual for an individual call. See Section 5.15 for more information.
CHANGE TLKGRP	Change the selected talkgroup. See Section 5.14.
PHONE CALL	Allows the user to initiate a telephone interconnect call. See Section 5.26 for more information.
CALL ALERT	Select a group for Call Alert transmission. See Section 5.25.
CHANNEL GUARD	Select the Transmit and/or Receive Channel Guard tone. See Section 5.22.
AUDIO PLAYBACK	Replays the last recorded call. See Section 5.28 for more information.
TONE ENCODE	Analog conventional only - Transmits a programmed tone sequence on the current radio system and channel. See Section 6.19 for more information.
T99 TOGGLE	Enable/disable T99. See Section 5.24 for more information.
EMERGENCY TIMER	Enable/disable the Emergency Check In Timer. See Section 6.22 for more information.
SCAN MENU:	
START SCAN/STOP SCAN	Start or stop scan operation. See Sections 5.29 and 5.30.
SCAN LISTS	View/Edit available scan lists. See Section 6.14.
ASSIGNED CUSTOM LIST	Create, View, and Edit Custom Scan Lists. See Section 6.14.6.
SITE ROAMING	Enable/Disable Wide Area System Scan. See Section 6.14.7.
SITE ALIAS	Select an available site from this list to lock the radio to, i.e., prevent the radio from roaming. This is also known as Site Lock. See Section 6.14.8 for more information.
SECURITY MENU:	
ZEROIZE KEYS	Removes all encryption keys from the radio. See Section 6.20.1.
ENCRYPTION	Enable/Disable encryption. See Section 5.20.

MENUS	DESCRIPTION
GLOBAL ENCRYPTION	Enable/Disable Global Encryption. See Section 6.20.3.
GLOBAL KEY	Select the Global Key. Only available if Global Encryption is Enabled. See Section 6.20.3.
ACTIVE KEYSSET	Select the Active Keysset. See Section 6.20.4.
KEY LIST	View available key lists. See Section 6.20.5.
OTAR	Enable/disable Over-the-Air Rekeying (OTAR). See Section 6.20.6.
OTAR REKEY	Request that the KMF updates the keys in the radio. See Section 6.20.6.
KVL Mode	Enables the radio to have keys loaded using the Motorola KVL. See Appendix D.2.3.
KVL Mode LLA	Puts the radio into KVL LLA Mode, allowing the user to load Link-Layer Authentication (LLA) Keys via a KVL-5000.
MESSAGES MENU:	
RADIO STATUS	Used to send a status condition to the site without making a voice call. See Section 0.
RADIO MESSAGE	Used to send a message to the site without making a voice call. See Section 6.16.
TEXTLINK MESSAGES	Allows the user to send a Radio TextLink message. See Section 6.17.
TEXTLINK FORMS	Allows the user to send a Radio TextLink form. See Section 6.17.
TEXTLINK MAILBOX	Contains received Radio TextLink messages. See Section 6.17.
FAULTS/ALERTS	Displays radio faults and alerts. See Section 6.18.
UTILITY MENU:	
AUDIO SETTINGS: <ul style="list-style-type: none"> • SPEAKER (MUTE/UNMUTE) • NOISE CANCELLATION • PTT • TONES • KEYPAD TONES • VOICE ANNUNCIATION 	Mute or unmute the speaker audio. Enable or disable Noise Cancellation. See Section 5.17. Enable or disable Push-To-Talk (PTT). Disable PTT to prevent accidental keying, such as when radio is in the holster, or you are getting into a car. Enable or disable radio side tones. Enable or disable tones that sound when the radio's keypad buttons are pressed. Enable or disable Voice Annunciation.
DISPLAY SETTINGS: <ul style="list-style-type: none"> • COLOR SCHEME • FRONT BACKLIGHT • FRONT BRIGHTNESS 	Press the Menu/Select button to toggle the front and top display's COLOR SCHEME for optimum visibility in day or night conditions (NORMAL or INVERTED). Press the Menu/Select button to toggle the front display backlighting between ON/OFF/MOMENTARY/MOMENTARY (OFF). Press the left or right navigation buttons to dim or brighten the display.
<ul style="list-style-type: none"> • FRONT TIMEOUT • FRONT DISPLAY OFF • TOP BACKLIGHT 	When the FRONT BACKLIGHT setting is MOMENTARY, this value specifies how long the radio needs to be inactive before the front display's backlight turns off. Press the left or right navigation buttons to change the time in 0.5 second increments. Turns the front display off completely. Press the Menu/Select button to turn the front display back on. When the front display is turned off, the only button functions that are allowed are: <ul style="list-style-type: none"> • PTT • Emergency • Toggle Profile • Flashlight • Toggle Stealth • Channel Up • Channel Down • Volume Up • Volume Down Press the Menu/Select button to toggle the top display backlighting ON/OFF/MOMENTARY.
<ul style="list-style-type: none"> • TOP BRIGHTNESS • TOP TIMEOUT • TOP ORIENTATION 	Press the left or right navigation buttons to dim or brighten the display. When the TOP BACKLIGHT setting is MOMENTARY, this value specifies how long the radio needs to be inactive before the top display's backlight turns off. Press the left or right navigation buttons to change the time in 0.5 second increments. Set orientation of top display to be viewed from radio: FRONT, BACK, or AUTO. When AUTO is selected, the radio changes the top display to be viewed from the back if an external microphone or speaker is attached. Otherwise, the display can be viewed from the front.
<ul style="list-style-type: none"> • INDICATOR LED 	Press the Menu/Select button to toggle the indicator LED ON or OFF.

MENUS	DESCRIPTION
BLUETOOTH: <ul style="list-style-type: none"> • ENABLED (YES/NO) • DISCOVERABLE (YES/NO) • VOLUME CONTROL (YES/NO) • BLUETOOTH SPEAKER • EXTERNAL SPEAKER • PAIRING MGMT 	Enable/disable Bluetooth. See Section 6.10 for more information. If YES, the radio knob can be used to adjust Bluetooth speaker volume (if the Bluetooth device supports it). Mute/Unmute Bluetooth Speaker. Mute/Unmute External Speaker. Pair Bluetooth devices with the radio. See Section 6.10 for more information.
CLOCK SETTINGS: <ul style="list-style-type: none"> • TIME FORMAT • TIME ZONE 	Select 12-hour, 12-hour with date toggle, 24-hour, or 24-hour with date toggle time display format. Set time zone relative to Universal Time Coordinated (UTC).
GPS SETTINGS: <ul style="list-style-type: none"> • GPS (ENABLED/DISABLED) • POSITION INFO • ANGULAR UNITS • LINEAR UNITS • POSITION FORMAT • SA OVER NETWORK 	Enable/disable GPS. Displays GPS, Latitude, Longitude, and Altitude information. From this menu, click NEXT to access SA INFO (see Section 6.2). Set unit of measurement of displayed angular units: CARDINAL, DEGREES, or MILS. Set unit of measurement of displayed linear units: STATUTE, METRIC, or NAUTICAL. Set format of displayed position information: Latitude/Longitude Decimal Degrees (LAT LONG DD), Latitude/Longitude Degrees Minutes Seconds (LAT/LONG DMS), LAT/LONG DM, Military Grid Reference System (MGRS), or Universal Transverse Mercator (UTM). When enabled, the radio sends GPS data to a L3Harris-supplied PC client using RNDIS networking.
PROGRAM: <ul style="list-style-type: none"> • ACTIVATE PLAN • PROFILES 	View/Activate a personality. See Section 6.1. Change current profile. See Section 5.16.
MAINTENANCE: <ul style="list-style-type: none"> • BATTERY INFO • RADIO INFO • RESET OVERTEMP EVENT • TESTS • PH2 LC DISPLAY • DISPLAY RSSI • TCXO TUNING • FEATURE INFO 	When a smart battery is attached, displays detailed battery status information. When a regular battery is attached, displays battery voltage. Displays radio information, i.e., ESN, software revisions, and firmware revisions. Reset an overtemp event. Requires entering the Maintenance Password. This menu item cannot be disabled. Allows service personnel to run radio tests. For field service use only. When enabled, RSSI is displayed on the RSSI screen and in the bottom of the idle display. -130 dBm is displayed when there is no received signal. For field service personnel only. Improper adjustment will result in loss of communications. Displays what features are enabled on your radio.
WIFI CLIENT: <ul style="list-style-type: none"> • POWER ON • ADD NEW 	Displays the list of available Wi-Fi clients and the status of Wi-Fi Connection (a question mark indicates the Wi-Fi network is in the process of connecting; a check mark indicates the Wi-Fi Network is connected). Turn Wi-Fi on/off. Displays the list of Trusted Wi-Fi Networks and is populated when Wi-Fi is powered on. You can view, add, modify, and remove a Wi-Fi Network.
WIFI ACCESS POINT: <ul style="list-style-type: none"> • POWER • CLIENT COUNT 	Power Wi-Fi On/Off. When the radio is configured as a Wi-Fi access point, displays the number of connected clients. Selecting CLIENT COUNT will display the MAC addresses of connected clients.
LTE: <ul style="list-style-type: none"> • PLMN (MCC/MNC) • Signal Strength • Registration Status • NGLM • IMEI • IMSI 	Displays the Public Land Mobile Network (Mobile Country Code/Mobile Network Code). Displays the LTE signal strength. Indicates if you are registered (connected) to the LTE network. Displays the Next Generation LTE Module's software revision. Displays the International Mobile Equipment Identity. The IMEI is used to identify devices on a network. Displays the International Mobile Subscriber Identity. The IMSI is used to identify the user of a cellular network and is a unique identification associated with all cellular networks.

MENUS	DESCRIPTION
ICON GLOSSARY	Defines icons displayed by the radio.
USER LOGIN	Enables the radio user to login. See Section 5.4.1 for more information.
• SYSTEM ID	Allows the radio user to enter/change the System ID for user login.
• UNIT ID	Allows the radio user to enter/change the User ID for user login.
• PASSWORD	Allows the radio user to enter the login password for user login.
DEVICE MANAGEMENT	Allows the user to check for and install updates from the L3Harris Device Management application over Wi-Fi.
STEALTH MODE SETTINGS	Allows the user to toggle features on/off when Stealth Mode is enabled.
• LCD ENABLED	Toggle LCD on/off when Stealth Mode is enabled.
• LED ENABLED	Toggle LED on/off when Stealth Mode is enabled.
• BACKLIGHT ENABLED	Toggle backlight on/off when Stealth Mode is enabled.
• SIDE/ALERT TONES ENABLED	Toggle side/alert tones on/off when Stealth Mode is enabled.
• MOBILE MAIN AUDIO PATH ENABLED	Toggle mobile main audio path on/off when Stealth Mode is enabled.
• VOICE ANNUNCIATION ENABLED	Toggle voice annunciation on/off when Stealth Mode is enabled.
• CHANNEL/GROUP KNOB ENABLED	Toggle channel/group knob enabled/disabled when Stealth Mode is enabled.
• TOP DISPLAY ENABLED	Toggle top display on/off when Stealth Mode is enabled.
• TOP DISPLAY MINIMUM BRIGHTNESS	Toggle top display to minimum brightness when Stealth Mode is enabled.
INSTALL GPP SOFTWARE	Select a GPP package to install.
CHANGE LANGUAGE	Press the up or down navigation buttons until the desired language is highlighted and then press Menu/Select button.
CHANGE PIN	Allows you to change your PIN.
ZONE MENU	View or change zones/systems (see Sections 5.11 and 6.3.1).

5.10 ALERT TONES

The radio provides audible Alert Tones or “beeps” to indicate various operating conditions. Some of the most common tones are described in Table 5-6.

Table 5-6: Alert Tones

TONE	DESCRIPTION	SOUND/DURATION
Ready to Talk Tone Unencrypted (Analog FM or P25 digital)	After a PTT is pressed, this is an audible indication (tone) for you to begin speaking into the microphone.	1000 Hz tone for 25 ms
Ready to Talk Tone Encrypted P25 digital	After a PTT is pressed, this is an audible indication (tone) for you to begin speaking into the microphone.	1200 Hz tone for 25 ms
PTT Denied	PTT not possible. Momentary tone is present: <ul style="list-style-type: none"> • Receive only. • Key not found. • PTT button disabled. • Emergency button disabled. • Emergency not supported for current channel. • Clear transmit denied. • Trunking Channel unavailable. 	544 Hz tone for 75 ms
Maximum transmit duration expires	Maximum transmit duration is exceeded.	5 beeps of 2400 Hz tone and then a 544 Hz tone for as long as PTT is pressed
Low Battery Alarm	Alarm sounds upon initial detection of low battery and every 30 seconds thereafter. Tone stops upon detection of a battery charging state.	Sequence of tones: <ul style="list-style-type: none"> • 937 Hz tone for 50 ms • Silence for 60 ms • 1300 Hz tone for 50 ms

TONE	DESCRIPTION	SOUND/DURATION
Emergency Call Received	Radio is receiving an emergency call or priority call.	600 Hz tone for 250 ms and 1800 Hz tone for 250 ms
Alternate Emergency Tone	If enabled via programming, the radio plays an alternate emergency tone when declaring and receiving an emergency.	Sequence of tones: <ul style="list-style-type: none"> • 1000 Hz tone for 150 ms • Silence for 20 ms
Out of Range	Radio fails to find a local control channel.	Programmable via RPM2: <ul style="list-style-type: none"> • Disabled (no tone) • Slow (tone every 15s) • Medium (tone every 10s) • Fast (tone every 5s) • Tones is 544 Hz tone for 75 ms
Evacuation Alert Tone	<ul style="list-style-type: none"> • Broadcasts an audible alert across the selected group/channel. This tone is often used to alert users on a group/channel to immediately evacuate a scene due to safety concerns. • To initiate the evacuation alert, the user must first hold a configured programmable button then depress the PTT button. The evacuation alert tone continuously broadcasts while the PTT button is depressed and the radio is transmitting. • All radios on the group/channel receiving the transmission, regardless of model type, receive the Evacuation Alert. • The specific evacuation alert tone that is played can be customized via configurable alert tone. • Functions on a P25T, P25C, or Analog Conventional system. 	Alternating 580 Hz and 440 Hz tone

5.11 SELECT ZONE/SYSTEM

A System is a group of channels or talkgroups that share a common set of parameters as programmed using RPM2. For example, a Trunking system defines the parameters needed to communicate on an infrastructure by agency or geographical region, such as WACN, System ID, Talkgroups, etc. A conventional system defines the channel set used and any specific signaling attributes (see RPM2 online help for more information on System attributes).

A Zone is an OPTIONAL *container* that can hold channels or talkgroups from a variety of systems (see Section 6.3). In other words, each member of a Zone belongs to an underlying system. Zones are always listed first in the Zone/System menu and are designated by the  icon. A button on the radio can be programmed to scroll through available zones/systems (see Section 7.5).




NOTE

If enabled via radio programming, systems are not displayed in the ZONE menu, only zones are displayed.

Or

To select a zone/system via the menu:

1. Press the Menu/Select button to access the menus.
2. Use the left or right navigation buttons to display the **ZONE** menu. The currently selected zone/system is highlighted. A personality can have up to 512 systems and up to 250 Zones, independent of banks or channels.
3. Use the up or down navigation buttons to highlight the desired zone/system. Press and hold the up or down button to scroll repetitively; the menu wraps to allow quick access to a zone/system.
4. Press the **VIEW ZONE** soft key to view channels in the zone/system or select the desired zone/system using the Menu/Select button.



5.12 SELECT GROUP/CHANNEL AND BANK

The radio can be programmed with 1,250 talkgroups or 1000 channels per personality. Use the Group/Channel knob to select groups/channels 1 - 16. Use the A/B/C/D switch to set the bank. The selected bank is indicated on the display.

- Bank A: Channel A1 - A16 (1-16)
- Bank B: Channel B1 - B16 (17-32)
- Bank C: Channel C1 - C16 (33-48)
- Bank D: Channel D1 - D16 (49-64)

If your system has more than 64 groups/channels, a button on the radio can be programmed for the SEL CHAN/GRP option. This allows you to select a “super bank,” providing access to groups/channels beyond the first 64. ZONES have a limit of 64 entries per zone and cannot be “superbanked.”

Numeric Channel Entry

A button on the radio can be programmed for Numeric Channel Entry, which allows the user to enter the talkgroup/channel number directly from the keypad.

The radio can be programmed for one of the following Numeric Channel Entry options:

- When a Zone is selected on the radio, Numeric Channel Entry performs a lookup using the currently selected system’s group list

Or

- When a Zone is selected on the radio, Numeric Channel Entry performs a lookup using the currently selected Zone’s system/group list.

5.13 LOCK/UNLOCK KEYPAD

There are two levels of keypad lock available. Keypad lock and Radio lock. Keypad lock only locks the navigation keys (except for use in unlock), programmable softkeys, and DTMF keypad. Radio lock disables all physical keys and knobs except:

- The 4-position switch
- PTT
- Emergency Button
- Any User Programmable Button (UPB) programmed for Monitor/Clear. This is required to allow Monitor/Clear to function for 2-button emergency clear.

The A/B switch, ABCD switch, or a button on the radio can be programmed to lock the keypad/radio. If the keypad was locked via a switch, moving the switch to another position will unlock the keypad. If locked via a button, the navigation keys must be used to enter the unlock sequence of Left, Right, Up, Down.



See Section 7.5 for the various options that can be programmed to the radio buttons and switches.

5.14 GROUP CALLS

5.14.1 Transmit a Group Call

A talkgroup is a group of radios that you want to have private conversations with. These groups can be divided into areas such as state, region, county, or large special events.

Turn the Channel/Group knob to select the desired group (see Figure 5-1). Press PTT to transmit.


Or

A button on the radio can be programmed for NUMERIC CHANNEL ENTRY to allow the user to enter the talkgroup/channel number. Press PTT to transmit.

Or

To transmit a group call:

1. In P25 Conventional, the talkgroup for the selected channel may be overridden as follows: Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **CALL** menu.
3. Press the up or down navigation buttons to highlight **CHANGE TLKGRP** and press the Menu/Select button.




4. Press the up or down navigation buttons to highlight the desired talkgroup and press the Menu/Select button. After selecting the new talkgroup, the radio returns to the main screen.



5. Press the PTT button to transmit.

5.14.2 Receive a Group Call

When receiving a group call, the status area of the idle display toggles between the Unit Name and the Group Name of the transmitting radio. If either of those names is not programmed, the corresponding ID number is displayed.




If an in-band alias for the transmitting radio/console is sent to the receiving radios, the receiving radios display that alias instead of the Unit ID or the I-CALL/Alias set contained in the receiving radio's personality, if any. The Alias alternates with the talkgroup name in the lower right display of the radio.

5.15 INDIVIDUAL CALLS


An individual call is used to make a call to one radio as opposed to a group of radios.

5.15.1 Add/Edit Contact from the Radio

1. Press Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **CALL** menu.
3. Press the up or down navigation buttons to highlight **INDIVIDUAL CALL** and press the Menu/Select button.




4. Press the **OPTIONS** softkey.



- Press Menu/Select button to select **MANAGE**.



- Select **MODIFY** to edit/create a User Contact or select **DELETE** to remove a contact from the list.



5.15.2 Transmit an Individual Call


- Press Menu/Select button to access the main menu.
- Press the left or right navigation buttons to display the **CALL** menu.
- Press the up or down navigation buttons to highlight **INDIVIDUAL CALL** and press the Menu/Select button.



- Use the up or down navigation buttons to highlight the unit to call and press the Menu/Select button, or select **KEYPAD** to enter the Unit ID.



- Press PTT to make the call. When transmitting an Individual Call, the radio displays the called radio's name or Unit ID. If the radio is programmed for Acknowledged Individual Call, the radio displays **CALL QUEUED** until the callee answers or rejects the call.



- After the callee answers, press PTT to respond.
- Press the right navigation button to end the call.


How long the radio remains in Individual Call mode with no activity is programmable.

5.15.3 Receiving an Individual Call


1. When receiving an Individual Call, the radio displays the calling radio's name or Unit ID. The radio will also display **PRESS → TO END**.



2. Press the PTT button to respond or the right navigation button to END/REJECT the call. How long the radio remains in the Individual Call mode with no activity is programmable.
3. The radio rings and indicates a missed call if you do not respond. The ring sounds until you press PTT, view the missed call menu using the up navigation button, change channel/group/system, or power cycle the radio.



4. The radio can store up to ten (10) missed call entries. Select one of these entries to call the unit back or press the **DISMISS** soft key to clear the entry.



5.16 USER PROFILES

XL Series radios support User Profiles (also referred to as “My Profile”). A User Profile is a grouping of preset configurations that allow the user to change radio operation based on current activity/scenario. For example, the radio can be programmed with profiles named Noisy, Fire, etc., and the radio user can switch profiles on the radio depending on the environment they are entering. User Profile selection persists across system/group changes and power cycles. Up to 10 profiles can be programmed to the radio. When you activate a new personality, the selected Profile changes to None.

A "Covert" Profile is installed on the radio by default. This profile cannot be modified or deleted. The following attributes apply when the Covert profile is active:

- The speaker is enabled.
- All tones are disabled.
- Keypad tones are disabled.
- Voice Annunciation is disabled.
- The front display backlight is disabled.
- The top backlight is turned off.


- The indicator LED is disabled.
- All other attributes remain at their current value.

The radio keypad sequence LEFT-RIGHT-UP-DOWN can be used to exit Covert Mode.

When enabling a Profile, the radio adjusts all the appropriate settings to that of the Profile selected. When disabling the Profile, the radio returns to the None Profile, which again is the personality settings, not what had been modified by the user. You can enable/disable a Profile as needed; you cannot change between two different User Defined profiles.

To change the currently selected Profile:

1. Press the Menu/Select button to access the menu.
2. Press the left or right navigation buttons until the **UTILITY** menu is displayed.
3. Press the up or down navigation buttons to highlight **PROGRAM** and press the Menu/Select button.



4. Press the left or right navigation buttons until the **PROFILES** menu is displayed.



5. Press the up or down navigation buttons to select the desired Profile and press the Menu/Select button.

A profile change persists across system/channel changes and power cycles.



A button on the radio keypad can be programmed to toggle profiles. See Section 7.5.1.

5.17 NOISE CANCELLATION

XL Series portable radios feature L3Harris' proprietary noise suppression capability to provide clear and crisp voice quality in high-noise environments. This can be used in any mode, including analog and digital communications.


The radio has two microphones; one located at the top of the radio (primary) and one on the bottom (secondary). When noise cancellation is enabled, voice is picked up by the upper left microphone, and noise is picked up from the bottom microphone.

In the case where noise cancellation is enabled and a speaker microphone is attached to the radio, talk into the speaker microphone. In this mode, the radio's top left microphone is used to pick up the surrounding noise, and the other microphone is unused. See Section 5.17.4 for more information. If the bottom (secondary) microphone is blocked, the radio operates as though noise cancellation is turned off.


5.17.1 Enable Noise Cancellation

To enable Noise Cancellation:

1. Press the Menu/Select button to access the menu.
2. Press the left or right navigation buttons until the **UTILITY** menu is displayed.
3. Press the up or down navigation buttons to highlight **AUDIO SETTINGS** and press the Menu/Select button.



4. Press the up or down navigation buttons to highlight **NOISE CANCELLATION**. Toggle Noise Cancellation **ENABLED/DISABLED** using the Menu/Select button.



Refer to Section 6.5 for more information on the Audio Settings menu.

5.17.2 Using Noise Cancellation

When using the noise cancellation feature, observe the following:

- Verify **NOISE CANCELLATION** is enabled (see Section 5.17.1).
- Talk within two (2) inches of the primary microphone (see Figure 5-5).
- Ensure the primary and secondary microphones are not covered. See Section 5.17.4 for more information on the primary and secondary microphones.
- Speak clearly, loudly, and with authority.
- In noisy environments, it is o.k. to yell into the radio. The radio can handle loud input levels.

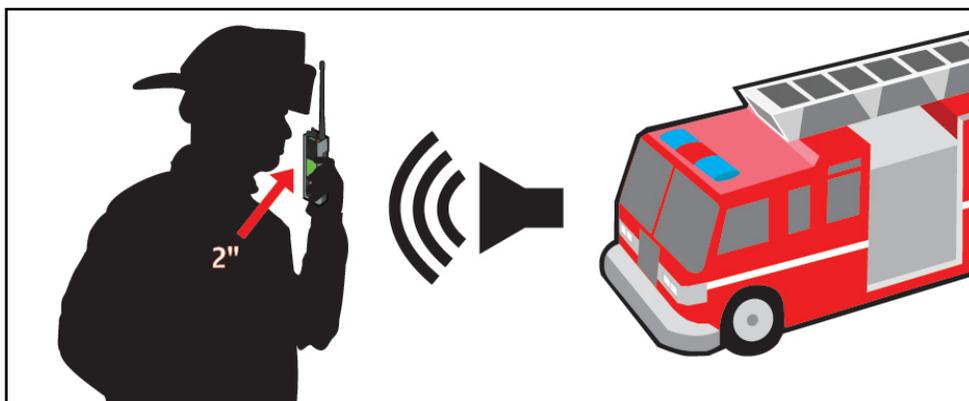


Figure 5-5: Using Noise Cancellation

5.17.3 The Effect of Distance from the Microphone

Unlike a normal microphone system, noise cancellation makes the level of your voice diminish quickly as you move away from the radio. The radio starts to see your voice as surrounding noise. Whereas you may be comfortable speaking up to a foot away under normal operation, noise cancellation requires that you hold the radio close.

5.17.4 Primary versus Secondary Microphone

5.17.4.1 Without a Speaker Microphone Attached

The primary microphone is located on top of the radio and the secondary is on the bottom of the radio (refer to Figure 5-1 for microphone locations).

5.17.4.2 With a Speaker Microphone Attached

When a speaker microphone is attached, the radio electronically switches over to use the radio's top left microphone as secondary. The microphone on the attached speaker microphone becomes primary.

5.17.5 When using a Self-Contained Breathing Apparatus (SCBA) Mask

When using an SCBA mask, the primary microphone can be held directly against the voice port. If the SCBA has a voice amplifier, the same rule applies. Ensure that the secondary microphone is uncovered. If possible, point the secondary microphone toward the noise source.

5.18 PTT OPTIONS

The radio can be programmed via RPM2 with one of the following PTT options:

- Radio and Accessory - In this mode, when the radio is PTTed, the audio source will correspond with the PTT source.
 - If the source of PTT is radio, the audio is routed via the radio microphone.
 - If the source of PTT is an external microphone accessory, the audio is routed via the external microphone accessory.
- Accessory Only - Any PTT input will have the audio routed through the external microphone accessory.



NOTE

The Bluetooth Speaker Mic is unaffected by this setting. PTTing the Bluetooth Speaker Mic always results in audio being routed via the Bluetooth Speaker Mic.

5.19 VOICE ANNUNCIATION

When enabled via programming, Voice Annunciation provides audible feedback for various radio operations. The radio can be programmed to play an audio message for any or all the following. This message can be a pre-recorded (canned) message or a user-recorded message.

- Zone changes
- Channel changes
- System changes
- Encryption On/Off
- Noise Cancellation On/Off
- Scan On/Off
- Talkaround On/Off
- Monitor Mode On/Off
- Two or Four Position switch change

For more information on configuring the radio for Voice Annunciation, refer to the *Voice Annunciation Feature Manual* 14221-7200-6110.

5.20 ENABLE/DISABLE ENCRYPTION

A switch or a button on the radio can be programmed to enable/disable encryption.



See Section 7.5 for the various options that can be programmed to the radio buttons and switches.

Or

Turn encryption on or off via the **SECURITY** menu:

1. Press the Menu/Select button to access the menus.
2. Use the left or right navigation buttons button to highlight and select the **SECURITY** menu.
3. Use the up or down navigation buttons to highlight **ENCRYPTION**. Toggle encryption enabled/disabled using the Menu/Select button. This option is grayed out if any switch is programmed for encryption, or if the Encryption Mode in the radio's personality is programmed "Forced On."



- If a channel is programmed to be encrypted, an optional key icon appears on the main display when encryption is enabled. The system must also be programmed for encryption.
- When encryption is enabled and you use any channel not configured for encryption, the radio allows PTT. The signal is transmitted unencrypted.

- Systems configured for Global Encryption (enabled in the SECURITY menu) can display an optional Global Encryption icon in addition to or instead of a key icon (Section 6.20.2).

5.21 TRANSMIT ENABLE/DISABLE

When transmit is disabled, all forms of transmission from the radio are disabled, including Bluetooth. This is designed for use in explosive atmospheres.

If enabled via programming, use the A/B switch to enable or disable transmit.



See Section 7.5 for the various options that can be programmed to the radio buttons and switches.

5.22 CHANNEL GUARD (ANALOG CONVENTIONAL ONLY)


Channel Guard is L3Harris' trademark for CTCSS (tone squelch) and CDCSS (digital tone squelch).




The Channel Guard menu is only accessible if the System is setup for CG SEL in the radio's personality.

To select the Channel Guard tone:


1. Press Menu/Select button to access the main menu.
2. Use the left or right navigation buttons to display the **CALL** menu.
3. Use the up or down navigation buttons to highlight **CHANNEL GUARD** and press the Menu/Select button.



4. Use the up or down navigation buttons to highlight **RECEIVE GUARD** or **TRANSMIT GUARD** and press the Menu/Select button.



5. Use the up or down navigation buttons to highlight the desired option from the list and select using the Menu/Select button.



- The Channel Guard frequency is displayed on the main display.

The Channel Info screen and Channel Edit screen will change depending on this selection. See Sections 6.4 and 7.3 for more information.



A button on the radio can be programmed for Channel Guard Override (see Section 7.5).

5.23 USE TALKAROUND TO BYPASS REPEATER (ANALOG AND P25 CONVENTIONAL ONLY)


You can bypass the repeater system to communicate directly with other radios on your current channel's receive frequency. This is useful if you are out of range of a repeater or if a repeater is busy. You must be in range of the other radio.



In XLP R4A and later, talkaround can be enabled/disabled on a per-channel basis. When talkaround is disabled, the icon is shown on the front and top display. If talkaround is disabled for a channel (via the RPM2 personality), and the user tries to enable talkaround via the menus or knobs while on that channel, the radio emits a “boop” deny tone. Additionally, if talkaround is disabled on a channel, the talkaround programmable button becomes inoperable and the radio boops.

To enable talkaround:


- Press Menu/Select button to access the main menu.
- Press the left or right navigation buttons to display the **CALL** menu.
- Press the up or down navigation buttons to highlight **TALKAROUND MODE**.



- Press the Menu/Select button to toggle **TALKAROUND MODE** to **ENABLED**.



- The optional talkaround icon appears. Calls are now made on the receive frequency until you disable talkaround mode via the **CALL** menu. Power cycling the radio does not disable talkaround.



Or

A button or switch can be programmed to toggle talkaround enable/disabled. See Section 7.5 for the various options that can be programmed to the radio buttons and switches.

If the talkaround Indication feature is enabled using RPM2, the radio will play a unique grant tone when a call is placed on a simplex channel or when talkaround has been enabled on a duplex channel. This feature applies to both Analog and P25 Conventional systems. It optionally allows the radio to also play the same tone when it receives a call while operating in simplex or talkaround. ***If configured, the radio plays the tone at the selected volume level.***



NOTE

The tone will not play on systems configured with MDC.

Talkaround Indication can be specified for each individual Analog and P25 Conventional system configured in personality. The following options can be selected, and apply only when the radio is on a simplex channel or when talkaround has been enabled by the user:

- Disabled: (This is the default option.) When this option is selected, the radio plays the standard grant tone when a call is placed. The radio does not play a tone when a call is received.
- Transmit Only: When this option is selected, the radio plays a different “talkaround” grant tone when a call is placed. The radio does not play a tone when a call is received.
- Transmit and Receive: When this option is selected, the radio plays a different “talkaround” grant tone when a call is placed, and at the beginning of a received call.



NOTE

In the radio personality, the “Alert Tone” parameter must be enabled for each channel on the Conventional Frequency Set. The “Ready to Talk Tone” parameter must also be enabled for the Talk Around Indication tone to be played when the radio is keyed.

5.24 TYPE 99 OPERATION


Type 99 is L3Harris' name for in-band, two-tone sequential signaling. It is a conventional signaling protocol used to control the muting and unmuting of a radio. This signaling is commonly used for selective calling of individual units or groups of units in a conventional system.

In Type 99 tone systems, calls are not heard until the radio detects the proper two-tone sequence. This, in conjunction with squelch, prevents the user from hearing noise or undesired conversations. When the radio detects the second tone, it sounds the appropriate Type 99 alert tone. After the second tone stops, the receiver audio path is opened for the user to receive messages.

5.24.1 Enable/Disable Type 99

To enable Type 99:

1. Press Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **CALL** menu.
3. Press the up or down navigation buttons to highlight **T99 TOGGLE**.



4. Press the Menu/Select button to change **T99 TOGGLE** between **ENABLED** and **DISABLED**. **T99** is displayed in the top of the radio display when Type 99 is enabled.

Or

A button or switch can be programmed to enable/disable Type 99 (see Section 7.5).

5.24.2 Disable After PTT

If this option is programmed using RPM2, Type 99 is disabled after the radio user activates the PTT. This allows the radio user to monitor traffic on the channel (after a PTT action) without pressing the monitor button.

Can be used in conjunction with the “Auto Reset” option (see Section 5.24.3) to disable Type 99 after a PTT and automatically reset, or enable, Type 99 after 30 seconds.

5.24.3 Auto Reset


If this option is programmed using RPM2, Type 99 is automatically reset, or turned back on, after 30 seconds. Can be used in conjunction with the “Disable After PTT” option (see Section 5.24.2) to disable Type 99 after a PTT and automatically reset, or enable, Type 99 after 30 seconds.

5.25 CALL ALERT (PAGE)


5.25.1 Send Alert

To send an alert:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **CALL** menu.
3. Press the up or down navigation buttons to highlight **CALL ALERT** and press the Menu/Select button.



4. Press the up or down navigation buttons to highlight the desired unit from the list and press the Menu/Select button, or select **KEYPAD** to enter the Unit ID.




5. Press **PTT** to send the page.

5.25.2 Receive Alert


1. When receiving a Call Alert, the radio displays the calling radio's name or Unit ID.
2. The radio rings and indicates a missed call. The ring sounds continuously until you press PTT, press the **CLR MISSED** softkey, change group/system, or power cycle the radio.

5.26 TELEPHONE INTERCONNECT

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **CALL** menu.
3. Press the up or down navigation buttons to highlight **PHONE CALL** and press the Menu/Select button.



4. Select an entry from the list of pre-programmed entries or click **DIRECT DIAL** to enter the number directly. Direct Dial entries can have up to 31 characters (0-9, *, #, or a space; the space correlates to a pause.) Select **OPTIONS** to view details about the highlighted pre-programmed entry. The radio supports up to 255 pre-programmed entries.



5. Press PTT to initiate the phone call. Press the right navigation button to end the call.

The radio does not permit telephone interconnect calls during an emergency. While in a phone call, the radio ignores all types of calls EXCEPT a System All Call. If the radio receives a System All Call while in a phone call, it immediately drops the phone call and accepts the All Call.

5.27 DTMF

XL Series portables support the transmission of DTMF tones corresponding to the numbers/characters on the keypad. To override numbers/characters, press and hold the PTT button, and then press the corresponding keys one at a time on the keypad. Valid keys for DTMF tones are: 1, 2, 3, 4, 5, 6, 7, 8, 9, *, 0, and #.



For conventional or P25 Conventional systems, DTMF tones only play if the current system is programmed for DTMF (part of general System configuration). DTMF tones are always enabled for P25 Trunking systems.

5.28 AUDIO PLAYBACK

The Audio Playback feature allows the user to playback a previously received call. Recordings are stored in the radio's RAM and are not persistent across power cycles. The radio stores the last five recorded calls, up to one minute each.


A button on the radio can be programmed to replay the last recorded call. To playback the last received call from a button:

1. Press the button programmed for audio playback. The last call received before the button was pressed is played each time the button is pressed.
2. Additional incoming calls will be recorded in the background, but pressing the button continues to replay the captured call until reset.
3. To reset the feature and allow a new call to be captured, press and hold the button until you hear a two-tone chirp. At this point, the button can be used to capture a new incoming call.

You can also playback one of the last five calls received via the menu.

To playback a previously received call from the menu:

1. Press the Menu/Select button.
2. Press the left or right navigation buttons to display the **CALL** menu.
3. Press the up or down navigation buttons to highlight **AUDIO PLAYBACK** and press the Menu/Select button.



4. Select the desired call from the list (the most recent call is at the top of the list) and press the select button. The selected call will be played.



- If a button is also programmed for Audio Playback, pressing the button replays the call selected in the menu. The feature must be reset as above to use the button to capture a new call.

- If a button is not programmed for Audio Playback, navigate back to the menu to play the call again.




Any incoming call that occurs during playback preempts the playback.

5.29 START SCAN


This procedure assumes that the scan list has been added and the radio is not in active scan. Refer to Section 6.13 for scan setup or Section 5.30 for stopping scan. Refer to Section 6.14.1.1, Section 6.14.1.2, and Section 6.14.1.3 for home and priority channel descriptions.

To start scan:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to highlight **START SCAN** and press the Menu/Select button. **START SCAN** text changes to **STOP SCAN**.




4. Press the **BACK** soft key to exit the scan menu.
5. The scan icon is displayed on the idle display when scanning is enabled.




Or

To start scan:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to highlight **SCAN LISTS** and press the Menu/Select button.



4. Press the up or down navigation buttons to highlight the desired **SCAN LIST** and press the **START SCAN** soft key.



Or

A switch or button on the radio can be programmed to start/stop scan.




If a switch is programmed for start/stop scan, the menu for starting and stopping scan is disabled.



See Section 7.5 for the various options that can be programmed to the radio buttons and switches.

5.30 STOP SCAN


1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to highlight **STOP SCAN** and press the Menu/Select button.




4. Press the **BACK** soft key to exit the scan menu.

Or

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to highlight **SCAN LISTS** and press the Menu/Select button.



4. Press the **STOP SCAN** soft key.



Or

A switch or button on the radio can be programmed to start/stop scan.



If a switch or button is programmed for start/stop scan, the menu for starting and stopping scan is disabled.



See Section 7.5 for the various options that can be programmed to the radio buttons and switches.

5.31 MONITOR AND SQUELCH TYPES (CONVENTIONAL ONLY)

The monitor function allows you to temporarily turn off selected squelch to monitor for traffic that may not normally break squelch. The type of squelch used depends on an analog or digital channel. A button or switch on the radio can be programmed to start or stop Monitor (see Section 7.5 for the various options that can be programmed to the radio buttons and switches.).

For analog channels, there is:

- Noise squelch - any received signal breaks squelch.
- Continuous Tone Coded Squelch (CTCSS) - squelch is selective based on tone code.
- Continuous Digital Coded Squelch (CDCSS) - squelch is selective based on digital code.

For digital channels, there is:

- Monitor squelch - any received digital signal breaks squelch.
- Normal squelch - Received Network Access Code (NAC) must be correct to break squelch.
- Selective squelch - Received NAC and talkgroup Identification (ID) or unit ID must be correct to break squelch.



During encrypted operations, the radio only unmutes when receiving with the same key.

5.32 NUISANCE DELETE

A channel can temporarily be deleted from the scan list. The selected channel, priority 1, and priority 2 channels cannot be nuisance deleted. A button or switch on the radio can be programmed for nuisance delete (see Section 7.5 for the various options that can be programmed to the radio buttons and switches).




NOTE


Nuisance delete can only be performed on the active scan list.

To perform a nuisance delete from the menu:


1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to highlight **SCAN LISTS** and press the Menu/Select button.




4. Press the up or down navigation buttons to highlight the scan list and press the Menu/Select button. When scanning is started, → indicates the active scan list; when scanning is stopped, indicates the active scan list.



5. Press the up or down navigation buttons to highlight the desired channel.
6. Press the **OPTIONS** soft key.




7. Press the up or down navigation buttons to highlight **NUISANCE** and press the Menu/Select button.



8. The  icon appears next to the channel and it will not be scanned.



9. Highlight the channel, press the **OPTIONS** soft key, and select **ADD BACK** to add the channel back to scan list. If you do not add the channel back to the list, the channel returns to the scan list when you cycle radio power or activate a personality.



10. Press the **BACK** soft key to exit the channel list.
11. Press the **BACK** soft key to exit the scan list display.

5.33 FAILSOFT

5.33.1 Conventional Failsoft (EDACS Only)

In the unlikely event of an EDACS system failure, communications can take place in Conventional Failsoft mode. The radio is automatically directed to a communications channel set up for this purpose. An increase in activity on the channel during Conventional Failsoft operation may be noticed, so be careful not to transmit until the channel is clear.

Operation during Conventional Failsoft is the same as operation on a conventional system, except that it is not possible to select a communications channel or use emergency and special call. When trunking is restored, the radio automatically returns to normal operation.



Emergency and special calls are not operational during Conventional Failsoft.

5.33.2 Failsoft (P25 Trunked)

When the site link to the VNIC is down, the site is operating in Failsoft mode. Radios operating on that site can still communicate with each other, but not with the rest of the system. The radio provides a visual indicator () on the display and plays a tone for a configured interval to indicate that the site is in Failsoft. This tone interval range is 0 to 120 seconds. This tone is not played during incoming voice or PTT.


5.34 EMERGENCY OPERATION

The radio can be programmed to enable emergency mode. Unit name displays on dispatcher console if an emergency signal is received from another radio on a digital channel.

5.34.1 Declaring an Emergency Call

To declare an emergency:


1. Press and hold the emergency button on the radio or the speaker microphone. The length of time you need to hold the button is configured using RPM2.
2. The emergency icon is displayed on the idle display.



- For digital channels, the radio transmits the talkgroup or radio ID to the dispatch console and receiving radio.
- The radio can be programmed to have a dedicated emergency channel, which can be activated from analog or digital channels.
- The radio can also be programmed to send an Emergency Alarm in addition to or in place of the emergency call (P25 modes).

The radio goes through transmit and receive cycles if so configured. Speak into the microphone while the radio is transmitting or press PTT to talk.

3. To exit emergency, power cycle the radio or select **EXIT EMERGENCY** from the CALL menu. If enabled via programming, clear an emergency by pressing the button programmed for the Monitor/Clear function and then the emergency button.



5.34.2 Receiving an Emergency Call

When receiving an Emergency Call, an alert tone sounds (if tones are enabled) and an emergency indication is displayed. The unit ID and/or unit name of the unit in emergency is displayed. While the emergency display is active, press PTT to respond to the emergency caller.

5.34.3 Stealth Emergency

The radio can be programmed with the following emergency behavior:

- No audio indications when declaring an emergency.
Or
- No visual indications when declaring an emergency.

Or

- No audio *and* no visual indications when declaring an emergency.

During stealth mode, the radio will not receive any type of call. Once the user presses the PTT button, the radio display and audio return to normal.

5.35 MDC-1200 (ANALOG CONVENTIONAL ONLY)

MDC-1200 is a legacy in-band signaling protocol that provides the radio with the ability to transmit and receive a unique PTT ID. This PTT ID can be decoded by receiving radios and displayed as a hexadecimal number or an alias string. In addition, MDC-1200 provides radios with the ability to transmit emergency status to a console. Refer to the *MDC-1200 Feature Manual*, 14221-7200-6000, for instructions on configuring and using this feature.

5.35.1 Normal PTT Operation

If MDC signaling on PTT press is enabled using RPM2, the radio transmits an MDC PTT ID message when PTT is pressed. If the Sidetone option is enabled using RPM2, the radio plays a Ready-to-Talk (RTT) tone after the MDC pre-signaling has been transmitted.

If MDC signaling on PTT release is enabled using RPM2, the radio transmits post-call MDC signaling when PTT is released.

- If STE is enabled using RPM2, the MDC post-call signaling is transmitted after STE is sent on PTT release only.
- MDC post-call signaling is also sent when there is a radio unkey due to Carrier Control Timeout (CCT). Normal CCT alert tones occur prior to unkey.

5.35.2 MDC PTT ID Receive Handling

When the radio receives an MDC PTT ID, it searches the MDC ID Alias List for an alias associated with the ID. If one is found, it displays the alias. If none is found, the radio displays the ID in hexadecimal.

5.35.3 Emergency Declaration

Emergency declaration is accomplished by the radio generating an MDC Emergency PTT message. An Emergency is considered acknowledged when the radio receives an "Ack To Emergency" PTT message with an ID which matches its own ID. If Emergency Audio is enabled and the PTT Sidetone option is enabled, the radio plays the Ready-to-Talk tone after the MDC Emergency PTT signaling is transmitted.

- If an MDC Alert on ACK is enabled, the radio plays an ACK tone when the MDC emergency is acknowledged.
- If audio tones are enabled, the radio plays an ACK tone if the emergency is not acknowledged within the programmed number of retries.

5.36 MULTIGROUP (P25 TRUNKING ONLY)

Multigroup is an implementation of announcement call functionality for P25 Trunking. There are two aspects to this: the multigroup itself and subgroups of the multigroup. Both the multigroup and its subgroups are talkgroups within a P25 group set. For any given P25 group set, a single multigroup and up to 32 sub-groups can be defined.

When tuned to the multigroup, the radio will:

- Transmit calls across the multigroup and its subgroups. This is commonly referred to as multigroup call.
- Receive all transmissions made on the multigroup and its subgroups.
- Halt any ongoing scan operation.

When tuned to a subgroup, the radio will:

- Transmit calls across the currently selected subgroup.
- Transmit calls across the multigroup if a multigroup call is received and PTTs during the hang time. For this to happen, the system must be configured to allow keyback on the multigroup. If keyback is not configured, the radio will always transmit across the subgroup.
- Receive all transmissions made on the multigroup and the currently selected subgroup.

5.37 XL-VIRTUAL/BEON OPERATION

5.37.1 Overview

The XL-Virtual solution is a Voice over IP (VoIP) based, Push-to-Talk (PTT) communications system operating over public or private wireless networks. The solution extends traditional Land Mobile Radio (LMR) services onto the broadband capable third generation (3G) and 4G/LTE cellular networks. This includes the ability to provide highly integrated interoperability services between XL-Virtual users on the cellular network and users of traditional LMR networks. L3Harris' VIDA® IP core network switching technology is the foundation for the XL-Virtual application infrastructure. Thus, the application and product suite provide many advanced features not found in competing technologies and provide internetworking of those services between public and private communications networks.



The XL Extreme Series Portable Radio supports XL-Virtual operation over Wi-Fi or LTE.

It may be necessary to consult one or more of the following when configuring and using XL-Virtual:

- *Configuration and Use Feature Manual*: 14221-7200-6130
- *LAS/LAP Installation and Configuration Manual*: 14221-710-3010
- *Unified Administration System User's Manual*: MM24374
- RPM2 online help

The following table provides a comparison of available XL-Virtual features versus P25 features:

Table 5-7: P25 Feature Support versus XL-Virtual Feature Support

FEATURE	XLP P25 SUPPORT	XLP BEON SUPPORT
DES encryption	Yes	No
All calls	Yes	No
PSTN calls	Yes	No
Status and Message	Yes	No
xRTT for dispatch consoles	Yes	No
Radio Unit Disable and Re-enable	Yes	No
Dynamic Regroup	Yes	No
Call Alert	Yes	No
Radio Check	Yes	No
Radio Status Query	Yes	No
Radio Detach	Yes	No
Radio Unit Monitor	Yes	No
ProFile and Radio TextLink	Yes	No
Radio-to-Radio GPS	Yes	No
Color coded Channels	Yes	No

The following table lists the Programmable Button options supported in P25 versus XL-Virtual:

Table 5-8: Supported Programmable Buttons

FEATURE	XLP P25 SUPPORT	XLP BEON SUPPORT
Audio Playback	Yes	Yes
Direct System/ Zone Entry	Yes	Yes
Fixed Preset	Yes	Yes
Flashlight Mode	Yes	Yes
Flip Top Display Orientation	Yes	Yes
Initiate OTAR Rekey	Yes	Yes
Lock Keypad	Yes	Yes
Scan Enable/Disable	Yes	Yes
Secure/Clear Toggle	Yes	Yes
Speaker Mute Toggle	Yes	Yes
Select Channel Group Bank	Yes	Yes
Stealth Mode	Yes	Yes
System Up/ Down	Yes	Yes
Zone Up/ Down	Yes	Yes
Drop Call	Yes	No
Editable Preset	Yes	No
Home Channel	Yes	No
Initiate Individual Call	Yes	No
Numeric Channel Entry	Yes	No
Nuisance Delete	Yes	No

5.37.2 Wi-Fi Client Selection

XL Extreme Series Portable Radios support up to 24 different Wi-Fi networks configurable via programming, with an option to select one of the configured networks as default.



NOTE

These 24 Wi-Fi networks are considered radio administrator approved and Trusted Wi-Fi Networks (TWiN) on which the radio can operate.


The radio will always join the network configured as the highest priority in the personality when multiple TWiNs are available.

To change the selected Wi-Fi network:

1. From the **UTILITY** menu, select **Wi-Fi Client**.




2. From here, select a network from the list, add a network, view details about the selected network, or remove the selected network.
3. Select **ADD NEW** to add a new network.




4. Highlight and select **SSID**. Use the keypad on the radio to enter the SSID and press the **ENTER** softkey.



5. Highlight and select **PASSWORD**. Use the keypad on the radio to enter the password.



6. Press the Menu/Select button to cycle through available Protocol selections (None, WPA, or WPA2-PSK).



7. Press the Menu/Select button to cycle through available Priority selections (Low, Medium, or High).



5.38 STEALTH MODE

For some users, it is important to be able to turn off the radio's display lights and side tones, but not the radio traffic. For example, in covert operations, lights and sounds could inadvertently expose an otherwise unobservable radio user. For this purpose, the radio has a Stealth feature that disables the radio display lights, indicator lights, audible alert, and side tones. When Stealth Mode is on, the radio continues to scan the programmed list of Talk Groups and the user can key-up on the selected Talk Group. A button or the two-position switch can be programmed via RPM2 to enable/disable Stealth Mode.

The following Stealth Mode options are configurable via RPM2:

- Persistence Enabled – Specify if Stealth Mode persists after the radio is powered down.
- LCD Enabled – Specify if the LCD is enabled or disabled for Stealth Mode.
- LED Enabled – Specify if the LED is enabled or disabled for Stealth Mode.
- Backlight Enabled – Specify if the Backlight is enabled or disabled for Stealth Mode.
- Side/Alert Tones Enabled – Specify if side tones and alert tones are enabled or disabled for Stealth Mode.
- Voice Annunciation Enabled – Specify if Voice Annunciation is enabled or disabled for Stealth Mode.
- Channel/Group Knob Enabled – Specify if the Channel/Group Knob is enabled or disabled for Stealth Mode.
- Top Display Enabled – Specify if the Top Display is enabled or disabled for Stealth Mode.
- Top Display Minimum Brightness – When this option is enabled, the top display is enabled at the minimum brightness when the radio is in Stealth Mode.


6. ADVANCED OPERATIONS

6.1 VIEW/CHANGE PERSONALITIES

Personalities contain radio programming information such as frequencies, channels, stations, and talk groups. Up to ten different personalities can be stored in the radio, but only one can be active at a time.

6.1.1 View Personalities

1. At main display, press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons to highlight **PROGRAM** and press the Menu/Select button. An arrow indicates the currently active personality.




4. Press the **OPTIONS** soft key.



5. Select **VIEW PLAN INFO** to view.




6. The radio displays the plan's filename. Personality information appears if the field was filled out using RPM2.



6.1.2 Change Active Personality

To change the active personality:


1. At main display, press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons to highlight **PROGRAM** and press the Menu/Select button.




4. Press the up or down navigation buttons to highlight the desired personality and press the Menu/Select button. → indicates the currently active personality.




5. Press the **YES** soft key to confirm personality activation. If the personality has a power-up PIN, you are prompted to enter the PIN before activation continues.



6. The **IN PROGRESS** screen is displayed while plan activation is in progress.



7. If personality is activated, the radio displays **PLAN COMPLETE** followed by the name of the personality. Press the **OK** soft key.




- You cannot activate a personality when the radio is transmitting an emergency.
- A **FAILED** message may be displayed for errors such as invalid syntax in the file or some other invalid parameter.

6.2 SITUATIONAL AWARENESS (SA) – P25 CONVENTIONAL ONLY


Situational Awareness is a feature in which the radio receives SA position from other units configured to send the SA packets. The SA display shows the positions of the other radios (units) relative to the radio. To make use of SA, all radios need to have a uniquely programmed Unit ID.

To display Situational Awareness Info:


1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons to select **GPS** and press the Menu/Select button.



4. Press the up or down navigation buttons to select **POSITION INFO** and press the Menu/Select button.



5. Press the **NEXT** soft key.



6. Press the left or right navigation buttons to view the location of each unit. The color of each unit indicates its status as follows. Only one status can be shown at a time and are listed in priority order:
 - Grey – Unselected, no status
 - Red – Unselected, In Emergency
 - Orange – Unselected, Low Battery
 - Blue – Unselected, Scanning
 - Green – Selected, no status
 - Green/Red – Selected, In Emergency
 - Green/Orange – Selected, Low Battery
 - Green/Blue – Selected, Scanning
7. GPS of this radio is shown by the center dot as follows:
 - Green – Tracking
 - Orange – Last known position
 - Red – Searching

- Press the up or down navigation buttons to zoom the display distance of current unit.



- Press the **OPTIONS** soft key. From here, select **UNIT INFO** to display details about the selected unit, select **REFRESH** to update information, or select **EXIT**.

6.3 USER-DEFINED ZONES/SYSTEMS

6.3.1 Command Tactical Zone


A Command Tactical Zone is defined at the radio.




A Command Tactical Zone is reset when a Personality is activated.

To create a Command Tactical Zone:


- Press the Menu/Select button to access the main menu.
- Press the left or right navigation buttons to display the **ZONE** menu.
- Press the up or down navigation buttons to highlight **<USER-DEFINED>** and press the **VIEW ZONE** soft key.



- Press the **OPTIONS** soft key.




- Press the up or down navigation buttons to select **EDIT ZONE** to create a zone or select **RENAME ZONE** to rename the Command Tactical Zone (up to 16 characters are allowed).




- Press the left or right navigation buttons to scroll through existing systems. Press the up or down navigation buttons to highlight desired channel/group.
- Press the Menu/Select button to add or remove channel/group.


- After adding all desired channels/groups, press the **BACK** soft key.



- Activate the Command Tactical Zone by selecting the **SET ACTIVE** soft key on the **USER DEFINED** screen, or by pressing the Menu/Select button when **<USER DEFINED>** is highlighted on the Zone menu.



- After creating a Command Tactical Zone, select **OPTIONS** to edit the Command Tactical Zone, delete channels/groups, clear the zone, and rename the zone.




6.3.2 Mixed System Zone

Mixed System Zones are defined using RPM2 and cannot be edited on the radio. If a Mixed System Zone is not configured using RPM2, it will not appear on the radio. Up to 250 Mixed System Zones can be defined. You can view details about each channel/group. A user programmable button can be defined to scroll through just the mixed system zones.

To view Mixed System Zones:

- Press the Menu/Select button to access the main menu.
- Press the left or right navigation buttons to display the **ZONE** menu.
- Press the up or down navigation buttons to highlight **the desired zone (Zones are indicated by the  icon)** and select **VIEW ZONE** to view the groups/channels in the zone list.




6.4 CH INFO MENU

The Channel Information (CH INFO) menu displays information about the currently selected channel. The information displayed varies between conventional and trunked systems. The Channel Information (CH INFO) menu display is only available if a Channel Edit Password has been programmed via RPM2.

To display channel information:

1. Press **◀** while on the idle display.
2. Press the up or down navigation buttons to scroll through the programmed channel settings.




CONVENTIONAL OR P25 CHANNELS ONLY:

3. Press the **EDIT** soft key.
4. Enter the password. You may now select and change the values of the displayed channel parameters. The password remains active until power cycle. Refer to Section 7.3 for more information.


6.5 AUDIO SETTINGS

From this menu, you can set audio settings such as speaker mute, noise cancellation, PTT, and tones.

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons highlight **AUDIO SETTINGS** and press the Menu/Select button.



4. Press the up or down navigation buttons to scroll through available audio settings. Press the Select/Menu button to change settings as desired:



- **SPEAKER** - Mute or Unmute the speaker audio.
- **NOISE CANCELLATION** - Enable or disable noise cancellation. Noise cancellation reduces background noise during transmit.
- **PTT** - Enable or disable Push-To-Talk (PTT). Disable PTT to prevent accidental keying, such as when the radio is in a holster or you are getting into a car.


- **TONES** - Enable or disable alert tones (see Table 5-6).
- **KEYPAD TONES** - Enable or disable keypad tones. When enabled, the radio plays a tone when a button on the keypad is pressed.

5. Press the **BACK** soft key to exit menu.


6.6 DISPLAY SETTINGS

To change display settings:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** Menu.
3. Press the up or down navigation buttons to highlight **DISPLAY SETTINGS** and press the Menu/Select button.



4. Press the up or down navigation buttons and the Select/Menu button to change settings as desired:



- **COLOR SCHEME** - Change the color scheme of the top and front displays for optimum viewing in day/night conditions.
- **FRONT BACKLIGHT** - Turn front display backlight on, off, momentary, or momentary (off). Momentary (off) is similar to momentary, but the backlight turns off completely and only comes on when the center navigation button is pressed.
- **FRONT BRIGHTNESS** - Set brightness level of front display. A level of 0 has same effect as turning off backlight.
- **FRONT TIMEOUT** - Specify how long the radio needs to be inactive before the front display's backlight turns off.
- **TOP BACKLIGHT** - Specify how long the top display's backlight will remain lit: MOMENTARY, ON, or OFF.
- **TOP BRIGHTNESS** - Set the brightness level of the top display. A level of 0 turns off top display and indicator (TX/RX) LED.
- **TOP TIMEOUT** - Specify how long the radio needs to be inactive before the top display's backlight turns off.

- FRONT DISPLAY OFF - Turns the front display off completely. Press the Menu/Select button to turn the front display back on. When the front display is turned off, the only button functions that are allowed are:

- PTT
- Emergency
- Toggle Profile
- Flashlight
- Toggle Stealth
- Channel Up
- Channel Down
- Volume Up
- Volume Down

Press the Menu/Select button to disable this feature and turn the front display back on.

- TOP ORIENTATION - Set orientation of top display to be viewed from radio: FRONT, BACK, or AUTO.

When AUTO is selected, the radio changes the top display to be viewed from back if an external microphone or speaker is attached. Otherwise, the display can be viewed from the front.

- INDICATOR LED - Toggle the indicator LED ON/OFF.

5. Press the **BACK** soft key to exit the menu.

6.7 GPS SETTINGS



NOTE


The **GPS SETTINGS** menu item only appears if enabled using RPM2 and the feature is installed.

To access GPS settings:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the UTILITY menu.
3. Press the up or down navigation buttons to highlight GPS and press the Menu/Select button.



- Use the up or down navigation buttons and the Select/Menu button to change settings as desired:



- **GPS** - Enable or disable internal GPS.
- **POSITION INFO** - See Section 6.8.
- **ANGULAR UNITS** - Set unit of measurement of displayed angular units: **CARDINAL**, **DEGREES**, or **MILS**.
- **LINEAR UNITS** - Set unit of measurement of displayed linear units: **STATUTE**, **METRIC**, or **NAUTICAL**.
- **POSITION FORMAT** - Set format of displayed position information: Latitude/Longitude Decimal Degrees (LAT LONG DD), Latitude/Longitude Degrees Minutes Seconds (**LAT/LONG DMS**), **LAT/LONG DM**, Military Grid Reference System (**MGRS**), or Universal Transverse Mercator (**UTM**).
- **SA OVER NETWORK** - When Enabled, the radio sends GPS data to an L3Harris-supplied PC client using RNDIS networking.


- Press the **BACK** soft key to exit the menu.

6.8 POSITION INFO


The Position Info screen displays the radio user's location information. GPS must be enabled in the GPS Settings (see Section 6.7).

To display position info:

- Press the Menu/Select button to access the main menu.
- Press the left or right navigation buttons to display the **UTILITY** menu.
- Press the up or down navigation buttons to highlight **POSITION INFO** and press the Menu/Select button.



- Press the up or down navigation buttons to scroll through available location information.



6.9 WI-FI

The XL Extreme Series Portable Radio supports programming via Wi-Fi. Refer to 0 for information on configuring Wi-Fi.



ISED restricts 5150-5250 MHz to indoor use only.

To enable Wi-Fi programming mode on the radio:

1. Ensure the radio is powered off.
2. Press and hold the bottom side button and PTT button (see Figure 4-1).



Figure 6-1: Enabling Wi-Fi

3. Power on the radio.
4. The WIFI INSTALL ACTIVE screen is displayed (Figure 6-2). The radio displays **DISCONNECTED** if not connected to a wireless network or **CONNECTED** if connected to a wireless network.



Figure 6-2: Wi-Fi Install Active



Refer to Section 5.37.2 for more information about Wi-Fi Client selection.

6.10 BLUETOOTH



The **BLUETOOTH** menu item only appears if enabled using RPM2 and if the feature is installed.

6.10.1 Enable Bluetooth

To enable Bluetooth:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons to highlight **BLUETOOTH** and press the Menu/Select button.



4. Press the up or down navigation buttons to highlight **ENABLED** and press the Menu/Select button to toggle **YES/NO**.



Or

A button or switch can be programmed to enable/disable Bluetooth.

6.10.2 Pair Devices



NOTE

Up to 10 pre-paired Bluetooth RSMs with unique IDs can be saved/stored in the radio's memory for automatic reconnection.

To pair devices:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons to highlight **BLUETOOTH** and press the Menu/Select button.





4. Press the up or down navigation buttons to highlight **PAIRING MGMT** and press the Menu/Select button.




5. Make sure device being paired is powered on and has discovery mode enabled to pair with the radio.

If no devices are found and Bluetooth is enabled, only the **ADD NEW** soft key is available. If devices are paired, the **OPTIONS** soft key appears.



6. Press the **ADD NEW** soft key to select a device to pair.
7. A list of available Bluetooth devices appears.




8. Press the **REFRESH** soft key to refresh the device list if the desired device does not appear.
9. Press the up or down navigation buttons highlight the desired device and press the **PAIR** softkey.

10. Pairing progress is displayed.

- For Bluetooth 2.0 devices, a pin code screen appears. Enter the pin code and select **OK**.
- For Bluetooth 2.1 devices, a **PASSKEY** accept/deny screen appears. Select **ACCEPT**. Accept the passkey on the Bluetooth 2.1 device as well.



11. A **PAIRING COMPLETE** message appears when pairing is complete. Select **OK**. The paired device is then displayed in the **PAIRED DEVICES** list.



6.10.3 Reconnecting to Covert Bluetooth Microphone 12082-0684-01

When powering down, the radio and the microphone should be turned off one at a time, allowing the first device to completely shut down before turning off the second device.

Power Up Sequence:

1. Power up the XL radio. Wait for power up to complete.
2. Power up covert microphone 12082-0684-01.
3. Wait for Bluetooth connection as indicated by the LED. When connected, the LED is on and blue.
4. If the microphone LED indicates Idle or does not connect, press and release the PTT button.

6.10.4 Pair with the SCOTT EPIC 3 Radio Direct Interface (RDI) Voice Amplifier

The RDI Voice Amplifier enhances SCBA voice intelligibility when connected to the XL Extreme Series Portable Radio via Bluetooth.

To turn the amplifier on and place into pairing mode:

1. Press and hold the power button until the LED changes from green to red. This happens in about four (4) seconds.
2. Release the power button.
3. The LED starts blinking indicating the amp is in pairing mode.
4. Ensure the LED is the same color blinking on and off indicating pairing mode. The amp will timeout of pairing mode quickly and the blinking will stop. If this happens before successful pairing, power off and restart from Step 1.
5. If the LED is blinking between light red and dark red, then the amp is in programming mode. If you try to pair with the amplifier in this mode, it will identify itself as an RI version. Turn off power and restart from step 1.


6.11 CLOCK SETTINGS

To view/change clock settings:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons to highlight **CLOCK SETTINGS** and press the Menu/Select button.



4. Use the up or down navigation buttons and Menu/Select button to change settings as desired:




- **TIME FORMAT**- Set 12 or 24-hour time display format.
 - **TIME ZONE** - Set time zone relative to Universal Time Coordinated (UTC).
5. Press the **BACK** soft key to exit.


6.12 BATTERY INFO

To display battery information:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons to highlight **MAINTENANCE** and press the Menu/Select button.
4. Press the up or down navigation buttons to highlight **BATTERY INFO** and press the Menu/Select button.



5. Battery information is displayed (state, voltage, capacity, chemistry, etc.).





Use only L3Harris approved batteries. Injury could occur from using an incorrect battery.

6.13 SELECT LANGUAGE

To change the language displayed by the radio:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **UTILITY** menu.
3. Press the up or down navigation buttons to highlight **CHANGE LANGUAGE** and press the Menu/Select button.



4. Press the up or down navigation buttons to highlight the desired language and press the Menu/Select button.



6.14 SET UP SCAN




For the scan list to save to non-volatile memory (i.e., FLASH), power-down the radio properly (i.e., turn off the radio using the power switch). The radio writes scan list changes to the non-volatile memory location **ONLY** when the power switch is turned off.

These procedures are used to set up the scan list, home channels, and priority channels.

To access the scan lists:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to highlight **SCAN LISTS** and press the Menu/Select button. Refer to the following sections.





NOTE

When using Preemptive Priority Scan, the frequencies in the list need to be unique.

6.14.1 Default, Priority 1, and Priority 2 Channels

6.14.1.1 Default Channel

This is the currently selected channel and is the channel you transmit on by default when you press PTT while the radio is actively scanning and is not responding to a just received call. Responding to a call the radio just received while scanning is called hang time. If hang time is set to 0 using RPM2, the radio always transmits on the default channel in scan.

6.14.1.2 Priority 1 Channel

This channel will be scanned more often than other channels in the list and will be scanned in between every other channel in the scan list. An example scan sequence would be P1 (priority 1), C2, P1, C3, P1, C4, etc. In addition, the priority channel is scanned even while actively receiving on a non-priority channel. For example, if the radio is actively receiving on C3 and activity is detected on P1, the radio drops C3 and switches to P1.

6.14.1.3 Priority 2 Channel

This channel is also scanned more often than others. An example scan sequence is P1, C2, P1, C3, P1, C4, P2, C5, P1, C6, P1, C7, P1, C8, P2, C9, etc. In addition, this channel is scanned even while actively receiving on a non-priority channel. For example, if the radio is actively receiving on C3 and activity is detected on P2, the radio drops C3 and switches to P2. Additionally, activity on P1 can also preempt P2, but P2 cannot preempt P1.

6.14.2 Trunked/Conventional Scanning

Trunked/conventional scanning adds the ability to scan multiple conventional and P25 conventional channels while still maintaining trunked radio operation. The radio can scan a conventional scan list while still receiving a trunked control channel and receiving trunked calls. Selection of which conventional scan list is associated with a given trunked system is done using RPM2 and cannot be changed on the radio. However, a user with access to the necessary menu layout (see Section 5.8) can edit the scan list members (both trunked groups and conventional channels on the selected Conventional Priority System). As the number of conventional channels being scanned increases, the time between scanning each channel increases (roughly 250 milliseconds per channel), with the consequent increase in the number of calls that will late-enter. To avoid missing calls, it is recommended to keep the number of conventional channels being scanned to eight (8) or fewer.




NOTE

The trunking site must have roaming set to Enhanced CC.

6.14.3 Vote Scan (Analog and P25 Conventional Only)

If vote scan is enabled via RPM2, the radio automatically selects the strongest signal ensuring that the best audio quality is delivered to the user. If vote scan is enabled, the radio is always scanning. You cannot stop scanning, start normal scanning, or monitor the channel. The scanning icon on the idle screen indicates that the radio is vote scanning versus regular scanning.



NOTE


If talkaround is enabled, Vote Scan is disabled until talkaround is disabled again.

6.14.4 Edit Scan List


Depending on the scan list options selected via RPM2, you may be able to add or remove channels/groups from the scan list.

To edit the scan list:


1. Press the Menu/Select button.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to select **SCAN LISTS**.



4. Press the up or down navigation buttons to highlight the scan list and press the Menu/Select button.




5. Press the up or down navigation buttons to highlight channel/group.
6. Select **OPTIONS**.



- Press the up or down navigation buttons to select ADD CHAN/DELETE CHAN, SET PRI1, SET PRI2, REMOVE PRI, or NUISANCE/ADD BACK.

When a channel is not grayed out in the list, **DELETE CHAN** appears. When a channel/group is grayed out (not in list), **ADD CHAN** appears.




- Press the Menu/Select button to toggle selection.

6.14.5 Set or Remove Priority 1 and Priority 2 Channels


Priority channels are scanned more often than non-priority channels. Note that P1 and P2 can only be set if configured as “Keypad” and the scan list is not set to “Fixed” using RPM2.

To set or remove priority 1 and priority 2 channels:


- Press the Menu/Select button.
- Press the left or right navigation buttons to display the **SCAN** menu.
- Press the up or down navigation buttons to highlight SCAN LISTS and press the Menu/Select button.



- Press the up or down navigation buttons to highlight the desired scan list and press the Menu/Select button.
- Press the up or down navigation buttons to highlight the desired channel/group.



- Select **OPTIONS**.
- Press the up or down navigation buttons to highlight **SET PRI1** or **SET PRI2** and press the Menu/Select button. A Priority 1 channel appears with a P1; a Priority 2 channel appears with a P2.
- Select **REMOVE PRI** to remove priority.



6.14.6 Custom Scan Lists

The Mixed Zone Scan (MZS) feature gives the user the capability to scan based on a custom scan list that is assigned at the system level. The Custom Scan (CS) list can contain System and Channel/Group configurations across P25 Trunked, P25 Conventional, and Analog Systems. When a Custom Scan List is assigned to a P25T system, the radio can scan P25T, P25C and Analog systems. When assigned to a P25C or Analog system, the radio only scans conventional channels. MZS also gives the user the capability to scan beyond the selected system group set.

- P25T Scan

When a custom scan list is assigned to a P25T system, the user can scan P25T, P25C, and Analog groups/channels. All P25T systems must have the same WACN, System ID, and Unit ID to be added to the custom scan list. If P25C and/or analog channels are added to the custom scan list, the radio will scan them using the Trunked/Conventional scan feature described in section 6.14.2, and will override any other conventional scan list that may have been programmed using RPM2.

- P25C and Analog Scan


When a custom scan list is assigned to a P25C or Analog System, the user can scan P25C and Analog channels. P25T systems are ignored.

Custom scan list can be created using RPM2 or at the radio. The radio supports up to 10 Custom Scan lists, with up to 100 channels/groups in each.


6.14.6.1 Create Custom Scan List

To create a custom scan list at the radio:


1. Press the Menu/Select button.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to highlight **ASSIGNED CUSTOM LIST** and press the Menu/Select button.




4. Press the **OPTIONS** softkey.




5. Select **ADD SCAN LIST**.



- Press the up or down navigation buttons to highlight the newly added scan list and press the **VIEW/EDIT** soft key.



- Press the left or right navigation buttons to display the desired system.



- Press the up or down navigation buttons to highlight the desired group/channel and press the **OPTIONS** softkey. From here, you can add/delete channels from the scan list and set/remove Priority 1 and Priority 2 channels.




When a custom scan list is selected, that list is scanned any time scanning is enabled for any Trunked, conventional, or P25 Conventional system. To scan only the channels assigned to a system, custom scanning must be turned off.

6.14.7 Wide Area System Scan (P25 Trunked and EDACS)

Wide Area System Scan (WASCAN) causes the radio to roam across mobile systems when the currently selected system's control channel is lost. The radio will scan the control channels of other systems.

To enable/disable Wide Area System Scan:

- Press the Menu/Select button to access the main menu.
- Press the left or right navigation buttons to display the **SCAN** menu.
- Press the up or down navigation buttons to highlight **SITE ROAMING** and press the Menu/Select button to toggle Wide Area System Scan **ENABLED/DISABLED**.



- Select **BACK** to exit the scan menu.

6.14.8 Site Lock

The Site Lock feature provides a list of available, adjacent sites that the user can lock the radio to. This restricts the radio from roaming between sites. Up to 512 sites can be programmed to the radio.




NOTE

Site Lock is only supported on P25 Trunked Systems with Enhanced CC Scan enabled.

A button on the radio can be programmed to access the Site Alias list (see Section 7.5).


1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SCAN** menu.
3. Press the up or down navigation buttons to highlight **SITE ALIAS**.



4. Press the Menu/Select button to display the list of available sites. If a Site Alias is programmed for the available site(s), it is displayed here. Otherwise, the system name is displayed.



5. From the **OPTIONS** menu, select **LOCK SITE** or **SWITCH SITE**.



6.15 RADIO STATUS

The status feature allows the radio user to send a status condition to the site without making a voice call. There can be up to 10 status conditions programmed into the radio. For each defined status, there is an ID and an alphanumeric name. The ID is sent to the site and the alphanumeric name appears on the radio display when the ID corresponds with the information programmed at the site.




NOTE


A button on the radio can be programmed to send a radio status (see Section 7.5).

To send a radio status:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **MESSAGES** menu.
3. Press the up or down navigation buttons to highlight **RADIO STATUS** and press the Menu/Select button.



4. Use the up or down navigation buttons and the Menu/Select button to highlight and select desired status.



6.16 RADIO MESSAGE

The message feature is used to send a message to the site without making a voice call. There can be up to 10 messages programmed into the radio. For each message defined, there is an ID and an alphanumeric name. The ID is sent to the site and the alphanumeric name appears on the radio display when the ID corresponds with the information programmed at the site.




NOTE


A button on the radio can be programmed to send a radio message (see Section 7.5).

To send a radio message:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **MESSAGES** menu.
3. Press the up or down navigation buttons to highlight **RADIO MESSAGE** and press the Menu/Select button.



4. Use the up or down navigation buttons and the Menu/Select button to highlight and select the desired message.



6.17 RADIO TEXTLINK

Radio TextLink provides short text messaging functionality for radios. Due to the difficulty of entering text messages on a radio, predefined "canned" messages and predefined replies can be stored in the radio. To facilitate sending messages where information must be provided at send time, text message forms can also be stored in the radio. A form can contain up to four (4) text prompts, for which the operator enters alphanumeric values before sending the message.

6.17.1 Radio TextLink Messages

To send a canned Radio TextLink message:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **MESSAGES** menu.
3. Press the up or down navigation buttons to highlight **TEXTLINK MESSAGES** and press the Menu/Select button.



4. Press the left or right navigation buttons to display the desired message.
 - Press the Menu/Select button to send the message.
 - Select **CHG CALLEE** to change the destination for the message.
 - Select **TOD QUERY** to get the time of day.

6.17.2 Radio TextLink Forms

Form messages are displayed and stored in the radio as a message in which each field to be filled is indicated by a question mark (?) followed by one or more asterisks (*). The number of asterisks indicates the maximum number of alphanumeric characters allowed for that field.

To send a Radio TextLink form:


1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **MESSAGES** menu.
3. Press the up or down navigation buttons to highlight **TEXTLINK FORMS** and press the Menu/Select button.



4. Press the left or right navigation buttons to display the desired message and press the Menu/Select button.



5. Enter text into blank field(s) (up to eight alphanumeric characters) and press the **NEXT** soft key.



6. Select **SEND** to send the message. Select **CHG CALLEE** to change the destination for the message. Select **TOD QUERY** to get the time of day.




6.17.3 View Received Messages

When the  icon appears on the idle display, there are Radio TextLink messages waiting to be read.

To view received Radio TextLink messages:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **MESSAGES** menu.
3. Press the up or down navigation buttons to highlight **TEXTLINK MAILBOX** and press the Menu/Select button. From the mailbox, select **OPTIONS** to delete messages, view details of messages, and reply to messages.



6.18 FAULTS/ALERTS

 is displayed on the idle display when there is a fault.

To view and clear faults/alerts:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **MESSAGES** menu.
3. Press the up or down navigation buttons to highlight **FAULTS/ALERTS** and press the Menu/Select button.



4. Fault messages are displayed. Press the up or down navigation buttons to highlight the desired fault. Press the **OPTIONS** soft key delete faults. Press the **DETAILS** soft key to view details for the highlighted fault.



Possible faults include:

- **BATTERY FAULT**- Replace battery.
 - **EEPROM FAULT** - Contact L3Harris.
 - **RF FAULT** - Contact L3Harris.
 - **OVERCURRENT** - Check antenna and antenna connection. Try replacing antenna.
 - **INVALID SYSTEM** - Feature not installed.
 - **CHANNEL FAULT** - Channel frequency programmed is not valid for this radio.
5. If you view but do not delete the fault, the alert icon goes away on the idle display.
 6. Contact L3Harris for assistance with diagnosing a fault.


6.19 TONE ENCODE

Tone Encode is a generic tone encoding scheme for call identification when transmitting on a conventional system. It supports generic user-definable tone encode (up to 15 tones), Type 99 (up to 2 tones) and 5/1 Tone (up to 5 tones) encoding formats.


Tone encoding schemes are used to transmit calls to one or more target radios that have been programmed with the correct tone decode sequence. When the receiving radio detects its tone decode sequence, it unmutes on the call.

To select a Tone Encode option:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **CALL** menu.
3. Press the up or down navigation buttons to highlight **TONE ENCODE** and press the Menu/Select button.



4. Select the desired Tone Encode option from the list.



6.20 ENCRYPTION

6.20.1 Zeroize Keys from Radio


It may be necessary to remove keys because of compromise or expiration.

To zeroize keys from the radio:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SECURITY** menu.
3. Press the up or down navigation buttons highlight **ZEROIZE KEYS** and press the Menu/Select button.



4. Press the **YES** softkey to remove the keys. This will also remove the keysets.



6.20.2 Protected Keys

The Protected Keys feature transfers P25 Voice Keys from L3Harris Key Loader to the radio that have been wrapped (AES) or encrypted (DES) with Key Protection Keys (KPKs). KPKs are nothing more than unprotected Key Encryption Keys (KEKs). The KPKs need to be loaded into the radio before the Protected Keys are loaded. Once loaded into the radio, the KPKs are used to unwrap (AES) or decrypt (DES) the Protected Keys.

6.20.3 Global Encryption

Global Encryption can be enabled when encryption keys are loaded on the radio and the selected Zone/System is encrypted. When Global Encryption is enabled on the radio, a Global Key is used for all encrypted transmissions until:

- Global Encryption is disabled.
- A new personality is activated.
- The active keyset is changed.
- The system is changed.

Global Encryption behavior is available on all channels that support encrypted communications.

To enable Global Encryption and/or change Global Encryption Key:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SECURITY** menu.

- Press the up or down navigation buttons to highlight **GLOBAL ENCRYPTION**. Press the Menu/Select button.



- Press the up or down navigation buttons to highlight the desired Global Key and press the Menu/Select button to enable Global Encryption.



- To change the selected global key, press the up or down navigation buttons to highlight **GLOBAL KEY** on the **SECURITY** menu. Press the Menu/Select key.



- Press the up or down navigation buttons to highlight the global key and press the Menu/Select button.



- RPM2 allows Key Numbers to be given Key Names.
- The optional global key icon  is displayed on the main display.

6.20.4 Select Keypad

To select a keypad:

- Press the Menu/Select button to access the main menu.
- Press the left or right navigation buttons to display the **SECURITY** menu.
- Press the up or down navigation buttons to select **ACTIVE KEYSSET**. Press the Menu/Select button to toggle to the inactive keypad.




6.20.5 View Key List

To view the key list:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SECURITY** menu.
3. Press the up or down navigation buttons to select **KEY LIST** and press the Menu/Select button.




4. The available key lists are displayed.




6.20.6 Delete Individual Keys

To delete individual keys from a keyset:


1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SECURITY** menu.
3. Press the up or down navigation buttons to select **KEY LIST** and press the Menu/Select button.



4. The available key lists are displayed.



5. Select the desired keyset and press the Menu/Select button to display the individual keys. Highlight the desired key and press the **DELETE** softkey.



6.20.7 OTAR Configuration

OTAR is the over-the-air-rekeying from a KMF and must be enabled for the digital only channel using RPM2. For OTAR operation, the appropriate KEKs must be loaded into the radio using the L3Harris Key Loader or a KVL device.


The KMF Configuration must include the RSI of the KMF and the appropriate Message Number Period.

To enable OTAR and request rekey:

1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **SECURITY** menu.
3. Press the up or down navigation buttons to highlight **OTAR** and press the Menu/Select button to toggle **ENABLED/DISABLED**.



4. Press the up or down navigation buttons to select **OTAR REKEY** and press the Menu/Select button to request that the KMF updates the keys in the radio. **OTAR REKEY** is only enabled if the radio has successfully registered for data operations. If enabled via programming, the radio plays an audible confirmation tone to indicate successful OTAR rekey.



6.21 P25 CONVENTIONAL FALLBACK

When P25 Conventional Fallback is enabled, a P25 trunking site responds to failures by allowing one or more channels to operate as conventional repeaters. Terminals which are properly configured can then communicate using the conventional P25 channel(s).

The radio provides an audible and visual indication when operating in P25 Conventional Fallback.

6.22 EMERGENCY CHECK-IN TIMER

The Emergency Check In Timer is an added safety feature for a radio user who may be in a dangerous environment. If this timer expires before being cancelled by the radio operator, an emergency is declared.

To enable the Emergency-Check In Timer via the radio menu:


1. Press the Menu/Select button to access the main menu.
2. Press the left or right navigation buttons to display the **CALL** menu.
3. Press the up or down navigation buttons to highlight **EMERGENCY TIMER** and press the Menu/Select button.



4. Set the Emergency Check-In Timer using the left or right navigation buttons. The minimum and maximum allowable values are programmed via RPM2. Default is 10 minutes.



5. Press RESTART to restart the timer or STOP to stop the timer and return to the CALL menu. If enabled via RPM2, pressing the PTT button will also restart the timer.



NOTE

Power cycling the radio will stop the Emergency Check-In Timer.

If the **EMERGENCY TIMER** menu is not available to the radio user, a button can be programmed to enable/disable the Emergency Check-In Timer. In this case, the timer value is set in RPM2 and cannot be changed at the radio.

7. PROGRAMMING

This section provides information on front panel programming. Programming can also be accomplished by creating a plan using a computer with RPM2 installed.


7.1 L3HARRIS DEVICE MANAGEMENT

L3Harris Device Management is a web-based application that allows the user to collect basic status and version information, read and program personalities, and program firmware in XL radios over LTE or secure Wi-Fi. Refer to the L3Harris Device Management User's Manual 14221-2100-2010 for information about using the application.

To initiate Device Management Actions from the radio:

The radio only communicates with L3Harris Device Management when initiated by the user as shown in the following steps:

1. From the radio menu select **UTILITY → DEVICE MANAGEMENT**.




2. Verify the **CONNECTION STATUS** is **CONNECTED**.



3. Highlight and select **DM ACTIONS** to check for available updates.



4. The **DM ACTIONS** menu displays **CHECKING** while searching for updates. This will change to **UPDATE AVAILABLE** if there are available updates.



5. Select **DOWNLOAD & INSTALL** to install available updates.

7.2 PROGRAMMING VIA RPM2

Radio Personality Manager2 (RPM2) is used to program the XL Extreme Series Portable Radio. With RPM2, you can fully program the radio using cable 12082-0410-A1.



CAUTION

Removing power during radio programming or programming the radio with low battery power could corrupt installation of firmware.



NOTE

Ensure that the radio is turned off before connecting the programming cable. After the cable is connected, then power on the radio.

7.3 EDIT CHANNEL (ANALOG AND P25 CONVENTIONAL ONLY)

Channels can be edited from the Channel Information (CH INFO) menu display. Most of the displayed channel parameters can be modified here. Channel edits persist across a power cycle. Loading a personality clears any channel edits. Available parameters vary depending on whether the channel is a P25 or analog channel. The Channel Information (CH INFO) menu display is only available if a Channel Edit Password has been programmed via RPM2.

To edit a channel:


1. From the main display, press **◀** to access the **CH INFO** screen.
2. Press the up or down navigation buttons to scroll through the programmed channel settings.
3. Press the **EDIT** soft key.



CAUTION

Only authorized users should attempt channel editing.

4. Enter the password programmed via RPM2. You do not have to re-enter the password until you power cycle the radio.
5. Press the **ENTER** soft key.



6. Highlight and select the parameter to edit. For P25 channels, modify remaining channel settings:
- **CHANNEL NAME** - The Channel Name cannot be changed from this screen; RPM2 is required to change the Channel Name.
 - **RX FREQUENCY** - Receive frequency. Note that if the new frequency is invalid, the display reverts to the old frequency (Table 7-1).
 - **TX FREQUENCY** - Transmit frequency.
 - **TX POWER** - Transmit power. Toggle between LOW and HIGH.
 - **TALKGROUP** - Select a talkgroup for the channel. Talkgroup name cannot be set here.
 - **RX NAC** - Network Access Code (NAC) radio uses for Normal squelch in receive.
 - **TX NAC** - NAC radio transmits to break Normal squelch on receiving radio.
 - **P25 SQUELCH** - Select type the radio uses in receive. Select NORMAL, SELECTIVE, or MONITOR.
 - **RX CHAN GUARD** – Squelch type radio uses in receive. Select Noise, CTCSS, or CDCSS. For a digital channel, the RX CHAN GUARD is used to receive from a Conventional analog channel that is on the same frequency and uses the selected Channel Guard.
 - **RX CODE** - Code radio looks to unmute the speaker on the receiving radio when CDCSS squelch is used in conventional mode.
 - **RX TONE** - Tone radio looks to unmute the speaker on the receiving radio when CTCSS squelch is used in conventional mode.
7. For analog channel, modify remaining channel settings:
- **CHANNEL NAME** - The Channel Name cannot be changed from this screen; RPM2 is required to change the Channel Name.
 - **TX FREQUENCY** - Transmit frequency.
 - **TX POWER** - Transmit power. Toggle between HIGH and LOW.
 - **RX CHAN GUARD** - Squelch type radio uses in receive. Select Noise, CTCSS, or CDCSS.
 - **RX TONE** - Tone radio uses to break selective squelch on receiving radio. This is available when RX squelch is set to CTCSS.
 - **RX CODE** - Code radio uses to break selective squelch on receiving radio. This is available when RX squelch is set to CDCSS.



RX CHAN GUARD is not available on this screen if it was enabled from the CALL menu as per Section 5.22.

- **TX CHAN GUARD** - Squelch type radio uses in transmit. Select None, CTCSS, or CDCSS.
 - **TX TONE** - Tone sent by transmitting radio to allow receiving radio to unmute when CTCSS squelch is used in conventional mode.
 - **TX CODE** - Code sent by transmitting radio to allow receiving radio to unmute when CDCSS squelch is used in conventional mode.



NOTE

TX CHAN GUARD is not available on this screen if it was enabled from the CALL menu as per Section 5.22.

8. An asterisk is displayed in front of the CHANNEL label on the main display when a channel has been edited. The asterisk is NOT shown for TX Power or Talkgroup changes.



NOTE

When the only item edited is the TX or RX CHAN GUARD values, and then CHAN GUARD edit is Disabled, the asterisk goes away and the channel is no longer considered edited. This is the only editable item for which this is true.

Table 7-1: Valid Frequency Ranges

INTERNATIONAL (NON-REBANDED)	US (REBANDED)	FREQUENCY RESOLUTION
136 - 174 MHz	136 - 174 MHz	2500, 5000, or 6250 Hz
378 - 522 MHz	378 - 522 MHz	2500, 5000, or 6250 Hz
763 - 775 MHz	768 - 775 MHz	6250 kHz
793 - 805 MHz	798 - 805 MHz	6250 kHz
806 - 825 MHz	806 -816 MHz	6250 kHz
851 - 870 MHz	851 - 861 MHz	6250 kHz

7.4 OTAP

The radio supports Over-the-Air-Programming (OTAP) via ProFile Manager. RPM2 creates, modifies, and stores personality information while ProFile Manager delivers the personality over the network to the desired radios. ProFile Manager also contains the ability to read personality information over-the-air and save the files, so that RPM2 can modify the information if necessary.

If necessary, interrupt the programming process by depressing the Push-to-Talk (PTT) button or declaring an emergency. Once a radio personality update is successfully completed, the radio automatically resets itself, switches to the new personality, and returns to normal operation. For more information on using ProFile Manager, refer to *Software Release Notes* 14221-1100-8250.

7.5 PROGRAMMABLE BUTTONS AND SWITCHES

7.5.1 Programmable Buttons

Press the down navigation button while on the main display to view the functions assigned to the programmable buttons. The programmable buttons are programmed using RPM2. A delay of 0 to 10 seconds can be defined using RPM2 for the programmable buttons. Table 7-2 lists and describes the functions that can be programmed to the buttons:

Table 7-2: Programmable Button Options

FUNCTION	DESCRIPTION
No Operation	
Adjust Squelch	Allows the user to adjust the analog squelch level using the 4/Left and 6/Right buttons.
Audio Playback	Accesses the AUDIO PLAYBACK menu. See Section 5.28.
Bluetooth Enable/Disable	Enable/disable Bluetooth. See Section 6.10.
Button Info	Opens the Programmable Button Info Menu. Button Info is assigned to the Key Down button by default.
Caller ID	Opens the Caller ID menu. When a Missed Call Alert is shown on the radio display, pressing the Key Up button on the radio opens the CALLER ID menu irrespective of the functionality assigned to the Key Up button.
Channel Guard Override	Allow user to pick a different Channel Guard setting for the current channel.
CMD Mute	Mutes all audio. Audio remains muted until this button is pushed again or until an I-Call is received by the radio.
Direct System/Zone Entry	Allow user to select system/zone.
Drop Call	Drop or terminate any group call that the radio receives.
Editable Preset	When this button is pressed and held for four (4) seconds, the radio saves the currently selected system/group or zone/channel to this button. When this button is pressed and released in less than four (4) seconds, the radio changes to the user-saved system/group or zone/channel if already saved by the user. If system/group or zone/channel is not configured for this button, when user defined preset button is pressed and released in less than four (4) seconds, the radio displays "Preset Empty."
Emergency Check In Timer	When this button is pressed, the Emergency Check In Timer is activated. See Section 6.22 for more information.
Fixed Preset	When this button is pressed and released, the radio changes to the system/group or zone/channel specified in RPM2.
Flashlight Mode	Press and hold to turn on the front and top display backlights. Release the button to turn off both displays.
Front Backlight	Toggles front display's backlight On/Off/Momentary.
Home	Goes to home channel.
Individual Call	Initiate an Individual Call.
Lock Keypad	Locks the DTMF keypad, programmable function keys and navigation keys.
Monitor Toggle	Toggles Monitor On/Off.
Monitor/Clear	Temporarily turn off selected squelch to monitor for traffic that may not normally break squelch. Also, press this button followed by the emergency button to clear an emergency.

FUNCTION	DESCRIPTION
Noise Cancellation Enable/Disable	Turns Noise Cancellation On/Off.
Nuisance Delete	Performs a Nuisance Delete. See Section 5.32 for more information.
Numeric Channel Entry	Allows numeric channel entry.
OTAR Rekey	Initiate an OTAR rekey. See Section 6.20.6.
Phone Call	Initiate a telephone interconnect call. See Section 5.26.
Profile Toggle	Toggles between the currently active profile (if one has been selected) and no profile.
Priority Talk Group	Assigns Priority Talk Group functionality in trunked systems. Assigns the button to UNASSIGNED and plays boop tone in Conventional systems.
Scan Enable	Enable/disable scan.
Secure Enable Toggle	Toggles Encryption Mode On/Off. See Sections 5.20 and 6.20 for information on Encryption.
Send Message	Sends a preconfigured message. See Section 6.16 for more information.
Send Status	Sends a preconfigured status. See Section 6.15 for more information.
Site Alias	Accesses the Site Alias list. See Section 6.14.8 for more information.
Site Roaming	Enable/disable Site roaming. Site Roaming allows the radio to roam to another site.
Speaker Mute Toggle	Toggles Speaker Muted/Unmuted.
Stealth Mode	Enable/disable Stealth Mode. See Section 5.38.
System Down	Scrolls down through the list of available systems, stopping when the end of the list is reached.
System Down Wrap	Scrolls down through the list of available systems, wrapping to the top when the bottom of the list is reached.
System Up	Scrolls up through the list of available systems, stopping at the top of the list.
System Up Wrap	Scrolls up through the list of available systems, wrapping to the end when the beginning of the list is reached.
Talkaround	Toggles talkaround On/Off. See Section 5.23.
Top Backlight	Toggles the top display's backlight On/Off/Momentary.
Top Orient	Toggles Top Display Front/Back.
TX Power High/Low	Toggle TX Power between LOW and HIGH.
View SA Display	Displays the Situational Awareness (SA) Screen. See Section 6.2.
Voice Announce	Enable/disable Voice Annunciation. See Section 5.19.
Zone Down	Scrolls down through the list of available mixed system zones, stopping when the end of the list is reached. If no mixed system zones are defined, or there is only one, the user will hear a deny tone when the button is pressed.
Zone Down Wrap	Scrolls down through the list of available mixed system zones, wrapping to the top when the bottom of the list is reached. If no mixed system zones are defined, or there is only one, the user will hear a deny tone when the button is pressed.
Zone Up	Scrolls up through the list of available mixed system zones, stopping at the top of the list. If no mixed system zones are defined, or there is only one, the user will hear a deny tone when the button is pressed.
Zone Up Wrap	Scrolls up through the list of available mixed system zones, wrapping to the end when the beginning of the list is reached. If no mixed system zones are defined, or there is only one, the user will hear a deny tone when the button is pressed.
WifiAP	Enables/disables the Wi-Fi AP in XL-Radios that include the LTE option.

7.5.2 Programmable A/B (Ø/O) Switch

The programmable A/B switch can be programmed for multiple functions, including:

Table 7-3: Programmable Ø/O Switch Options

FUNCTION	DESCRIPTION
Clear/Secure	Enable/disable encryption.
Scan	Turn scan operation on/off.
Stealth Mode	Enable/disable Stealth Mode.
Talkaround	Enable/disable talkaround.
Keypad Lock/Unlock	Locks/unlocks the keypad.
TX Enable/Disable	Enable/disable transmit.
Bluetooth	Enable/disable Bluetooth.
Emergency Check In Timer	Activates the Emergency Check In Timer. See Section 6.22.



NOTE

Switch position Ø is ON. Switch position O is OFF.

7.5.3 Programmable A/B/C/D Switch

Sections 7.5.3.1 and 7.5.3.2 describe the various functions that can be programmed to the A/B/C/D switch.

7.5.3.1 Single-Instance Features

Single-instance features can only be assigned to one switch position at a time. If one of these features is programmed to the A/B/C/D switch, other means of accessing that feature are disabled (i.e., two-position switch, programmable buttons, call menu, etc.).

Table 7-4: Single-Instance Features

FUNCTION	DESCRIPTION
No Function	No function programmed to switch.
Talkaround	See Section 5.23.
Scan	Enables scanning.
Bluetooth	Enable Bluetooth.
TX Power High	<p>Sets transmission power level to High.</p> <ul style="list-style-type: none"> Changing to a Tx Power High position overrides the current personality or user setting for TX Power. Changing from a Tx Power High position restores the personality-configured Tx Power Level.
TX Power Low	<p>Sets transmission power level to Low.</p> <ul style="list-style-type: none"> Changing to a Tx Power Low position overrides the current personality or user setting for TX Power. Changing from a Tx Power Low position restores the personality-configured Tx Power Level.
Keypad Lock	Locks DTMF, programmable, and navigation soft keys.

FUNCTION	DESCRIPTION
Radio Lock	<p>When set, prevents the radio software from responding to the following physical inputs on the radio:</p> <ul style="list-style-type: none"> • Volume Knob Change (power off is not prevented) • 2-Position Switch • Channel Knob • Side User-Programmable Buttons and Keypad (DTMF, programmable, and navigation/soft keys) <p>Exception is the emergency button and if any key is programmed for Monitor/Clear, it can be used with the emergency button to clear emergencies, if so programmed.</p>
Channel Bank	<p>Selects channels 1-16 in position A; 17-32 in position B; 33-48 in position C; and 49-64 in position D.</p> <p>If Channel Bank is selected for any single position, all 4 positions (A, B, C, and D) will be set to Channel Bank.</p>

7.5.3.2 Indexed Features

These features can be assigned to any number of positions if each index value selected for it is unique across multiple assignments of the same feature; for example, you cannot assign a Zone with an index (e.g., "ZONE A") to both positions A and B.

Table 7-5: Indexed Features

FUNCTION	DESCRIPTION
Zone Selection	<p>Sets to the Zone index value.</p> <ul style="list-style-type: none"> • When setting the A/B/C/D switch to an indexed zone assigned position, the radio sets, but does not "hold," that zone. This has the resulting effects: <ul style="list-style-type: none"> ➤ This sets the channel knob to be zone-based system/channel selection just like selecting a zone from the main "Zone" menu or ramping up/down using the side user-programmable buttons. ➤ If a user then changes to a different system or zone via another method (menu, button, etc.), it will override the Zone selection switch setting accordingly and not require it to remain in the zone where the switch assignment is set. • When changing away from a Zone assigned position, no actions/changes will be taken by the radio.
System Selection	<p>Sets to the System index value.</p> <ul style="list-style-type: none"> • When setting the A/B/C/D switch to an indexed System assigned position, the radio sets, but does not "hold," that System. This has the resulting effects: <ul style="list-style-type: none"> ➤ This sets the channel knob to be system-based channel selection, just like selecting a system from the main "Zone" menu or ramping up/down using the side user-programmable buttons. ➤ If a user then changes to a different system or zone via another method (menu, button, etc.), it will override the System selection switch setting accordingly and not require it to remain in the system where the switch assignment is set. • When changing away from a System assigned position, no actions/changes will be taken by the radio.

7.6 PROGRAMMABLE ICONS

7.6.1 Top Display

The top display has space for up to seven configurable icons, which can be programmed to display any of the following:

- Blank
- Signal Strength
- Battery Status
- Bluetooth enabled
- Encryption enabled
- Scan/Vote Scan enabled
- Talkaround enabled
- Emergency mode active
- Wi-Fi

7.6.2 Front Display

The front display has space for up to 10 configurable icons, which can be programmed to display any of the following:

- Blank
- Signal Strength
- Battery Status
- Bluetooth enabled
- Encryption enabled
- Global Encryption
- Talkaround enabled
- TX Disabled
- Tones Disabled
- PTT Disabled
- Speaker Muted
- Monitor
- OTAR Status (Disabled, Registering, Registered, Rekeying)
- TX Power level (Low/High/RX Only)
- GPS Status
- VDOC
- Failsoft
- Data Status (TX/RX)
- Alert(s)
- RX Mail
- Noise Cancellation Enabled
- Type 99 Enabled
- Conventional Site Status (Unregistered/Registered)
- Wi-Fi
- Wi-Fi AP

8. REFERENCE

8.1 MARINE FREQUENCIES

Refer to Table 8-1: Marine Frequencies for a list of maritime frequencies per United States Coast Guard (USCG).

A radio designated for shipboard use must comply with Federal Communications Commission Rule Part 80. Additional information about operating requirements in the Maritime Services can be obtained from the full text of FCC Rule Part 80 and from the US Coast Guard.

Table 8-1: Marine Frequencies

NEW CHANNEL NUMBER	OLD CHANNEL NUMBER	SHIP TRANSMIT MHZ	SHIP RECEIVE MHZ	USE
1001	01A	156.050	156.050	Port Operations and Commercial, VTS. Available only in New Orleans / Lower Mississippi area.
1005	05A	156.250	156.250	Port Operations or VTS in the Houston, New Orleans and Seattle areas.
06	06	156.300	156.300	Intership Safety
1007	07A	156.350	156.350	Commercial. VDSMS
08	08	156.400	156.400	Commercial (Intership only). VDSMS
09	09	156.450	156.450	Boater Calling. Commercial and Non-Commercial. VDSMS
10	10	156.500	156.500	Commercial. VDSMS
11	11	156.550	156.550	Commercial. VTS in selected areas. VDSMS
12	12	156.600	156.600	Port Operations. VTS in selected areas.
13	13	156.650	156.650	Intership Navigation Safety (Bridge-to-bridge). Ships >20m length maintain a listening watch on this channel in US waters.
14	14	156.700	156.700	Port Operations. VTS in selected areas.
15	15	--	156.750	Environmental (Receive only). Used by Class C EPIRBs.
16	16	156.800	156.800	International Distress, Safety and Calling. Ships required to carry radio, USCG, and most coast stations maintain a listening watch on this channel.
17	17	156.850	156.850	State & local govt maritime control
1018	18A	156.900	156.900	Commercial. VDSMS
1019	19A	156.950	156.950	Commercial. VDSMS
20	20	157.000	161.600	Port Operations (duplex)
1020	20A	157.000	157.000	Port Operations
1021	21A	157.050	157.050	U.S. Coast Guard only
1022	22A	157.100	157.100	Coast Guard Liaison and Maritime Safety Information Broadcasts. Broadcasts announced on channel 16.
1023	23A	157.150	157.150	U.S. Coast Guard only
24	24	157.200	161.800	Public Correspondence (Marine Operator). VDSMS
25	25	157.250	161.850	Public Correspondence (Marine Operator). VDSMS
26	26	157.300	161.900	Public Correspondence (Marine Operator). VDSMS
27	27	157.350	161.950	Public Correspondence (Marine Operator). VDSMS
28	28	157.400	162.000	Public Correspondence (Marine Operator). VDSMS
1063	63A	156.175	156.175	Port Operations and Commercial, VTS. Available only in New Orleans / Lower Mississippi area.

NEW CHANNEL NUMBER	OLD CHANNEL NUMBER	SHIP TRANSMIT MHZ	SHIP RECEIVE MHZ	USE
1065	65A	156.275	156.275	Port Operations
1066	66A	156.325	156.325	Port Operations
67	67	156.375	156.375	Commercial. Used for Bridge-to-bridge communications in lower Mississippi River. Intership only.
68	68	156.425	156.425	Non-Commercial. VDSMS
69	69	156.475	156.475	Non-Commercial. VDSMS
70	70	156.525	156.525	Digital Selective Calling (voice communications not allowed)
71	71	156.575	156.575	Non-Commercial. VDSMS
72	72	156.625	156.625	Non-Commercial (Intership only). VDSMS
73	73	156.675	156.675	Port Operations
74	74	156.725	156.725	Port Operations
77	77	156.875	156.875	Port Operations (Intership only)
1078	78A	156.925	156.925	Non-Commercial. VDSMS
1079	79A	156.975	156.975	Commercial. Non-Commercial in Great Lakes only. VDSMS
1080	80A	157.025	157.025	Commercial. Non-Commercial in Great Lakes only. VDSMS
1081	81A	157.075	157.075	U.S. Government only - Environmental protection operations.
1082	82A	157.125	157.125	U.S. Government only
1083	83A	157.175	157.175	U.S. Coast Guard only
84	84	157.225	161.825	Public Correspondence (Marine Operator). VDSMS
85	85	157.275	161.875	Public Correspondence (Marine Operator). VDSMS
86	86	157.325	161.925	Public Correspondence (Marine Operator). VDSMS
87	87	157.375	157.375	Public Correspondence (Marine Operator). VDSMS
88	88	157.425	157.425	Commercial, Intership only. VDSMS
AIS 1	AIS 1	161.975	161.975	Automatic Identification System (AIS)
AIS 2	AIS 2	162.025	162.025	Automatic Identification System (AIS)

8.2 NARROWBANDING

The FCC has mandated that all public safety radios manufactured after January 1, 2013 comply with narrowbanding restrictions. Radios manufactured after the above date will comply with these restrictions. Existing radio personalities that contain frequencies that violate these FCC rules will cause an invalid channel error indication on the radio display. The user will need to change the radio personality to comply with the new rules. Note that there are multiple exceptions to the narrowbanding mandate, including the Marine Frequencies listed in Section 8.1.

9. GLOSSARY

-A-

AES	Advanced Encryption Standard
AES-256	Advanced Encryption Standard, 256-bit
AMBE+2	Advanced Multi-Band Excitation implementation 2
ANSI	American National Standards Institute
ASCII	American Standard Code for Information Interchange

-B-

-C-

C	Celsius
CA	Canada
CDCSS	Continuous Digital Coded Squelch System
CH INFO	Channel Information
CKR	Common Key References
CMB	Continuous Marine Broadcast
CTCSS	Continuous Tone Coded Squelch System

-D-

DES	Digital Encryption Standard
DES-OFB	Digital Encryption Standard Output Feedback
DFO	Department Fisheries Ocean
DMS	Degrees Minutes Seconds

-E-

EPIRB	Emergency Position-Indicating Radio Beacons
--------------	---

-F-

F	Fahrenheit
FCC	Federal Communications Commission
FM	Frequency Modulation

-G-

GHz	Giga (10 ⁹) Hertz
GEOTRANS	Geographic Translator
GPS	Global Positioning System

-H-

Hz	Hertz
HKL	Harris Key Loader

-I-

ID	Identification
IEEE	Institute of Electrical & Electronics Engineers
INTL	International

-J-

-K-

KEK	Key Encryption Key
kHz	kilo (10 ³) Hertz
KID	Key Identification
KMF	Key Management Facility
KMS	Key Management System
KS	Key Set
KVL	Key Variable Loader (Motorola KVL Device)

-L-

LAT/LONG DMS	Latitude/Longitude Degrees Minutes Seconds
LAT LONG DD	Latitude/Longitude Decimal Degrees
LED	Light Emitting Diode
Li-ION	Lithium-ION

-M-

MHz	Megahertz
mm	Millimeter
MR	Mobile Radio
ms	milli (10 ⁻³) seconds

-N-

NAC	Network Access Code
Ni-MH	Nickel Metal Hydride
NOAA	National Oceanic and Atmospheric Administration

-O-

OET	Office of Engineering and Technology
OTAR	Over-The-Air Rekey

-P-

P25	Project 25
POS	Position
PRI	Priority (Channel)
PTT	Push-to-Talk

-Q-**-R-**

RF	Radio Frequency
RPM2	Radio Personality Manager 2
RSI	Radio Set Identifier
RSM	Remote Speaker Microphone
RX	Receive

-S-

SA	Situational Awareness
SMA	Subminiature Version A

-T-

TIA Telecommunications Industry Association
TX Transmit

-U-

UHF Ultra High Frequency
UKEK Unique Key Encryption Key
US United States
USCG United States Coast Guard
UTC Universal Time Coordinated
UTM Universal Transverse Mercator

-V-

VDC Volts, Direct Current
VHF Very High Frequency
VIDA Voice Interoperability Data Access
VTS Vessel Traffic Service

-W-

WEEE Waste from Electric and Electronic Equipment

-X-

-Y-

-Z-

10. BASIC TROUBLESHOOTING

For radios with XLP R3A and later, if  is displayed, the radio has lost its factory information and needs to be returned for updating.

If the XL Extreme Speaker Microphone fails for any reason, audio is routed through the radio.

10.1 ERROR MESSAGES

This section provides a list of error messages, as well as possible causes and solutions.

Table 10-1: Displayed Error Messages, Reasons, and Resolutions

SCREEN/ MENU	DISPLAYED ERROR MESSAGE	REASON	RESOLUTION
Top-Level Screen	INVALID KEYSTORE ZEROIZE NEEDED	Corrupt key database or incorrect database configuration.	Zeroize database.
Bluetooth Pairing Screen	PAIRING FAILED	Bluetooth pairing failed.	Ensure device is discoverable and attempt to re-pair the device.
Channel Edit Screen	EDIT FAILED	Unable to modify P25 Channel.	Power cycle and try again--contact L3Harris if problem persists.
Channel Edit Screen	INVALID RX FREQUENCY	Entered Rx frequency is invalid.	Ensure frequency follows band spacing rules.
Channel Edit Screen	INVALID TX FREQUENCY	Entered Tx frequency is invalid.	Ensure frequency follows band spacing rules.
Install Operations	INSTALL FAILED	Error during install process.	Transfer file again and reattempt install. Contact L3Harris if problem persists.
Install Operations	INSTALL FAILED	Extraction of compressed file failed.	Transfer file again and reattempt install. Contact L3Harris if problem persists.
Install Operations	INSTALL FAILED	Removal of existing SW failed.	Attempt install again and contact L3Harris if problem persists.
Mission Plan In Progress Screen		Mission plan activation failed.	Use RPM2 to ensure plan validity. Contact L3Harris if failures persist.
Security Menu	ZEROIZE FAILED	Radio could not zeroize.	Radio problem—power cycle and contact L3Harris if problem persists.
Security Menu	NO KEYS TO ZEROIZE	Key database empty.	Nothing to zeroize.
Utilities Menu	INCORRECT PASSWORD	Maintenance password invalid.	Enter valid maintenance password.
Channel Info Screen	INCORRECT PASSWORD	Channel edit password invalid.	Enter valid channel edit password.

SCREEN/ MENU	DISPLAYED ERROR MESSAGE	REASON	RESOLUTION
Top-Level Screen	USER REGISTRATION FAILED FOR...	The user has either entered the wrong values or the user is not in the UAS database.	Check the System ID and User ID. If they are correct, contact your network administrator.
Top-Level Screen	USER PASSWORD FAILED FOR...	The user has entered a different password than what is in the UAS when password is required.	Re-enter the password. If the error persists, contact your network administrator.
Top-Level Screen	RADIO ESN INVALID FOR...		Contact your network administrator.
Top-Level Screen	EXCEED ALLOWED USERS FOR...	There are already three radios registered with the same User ID.	Turn off one of these radios or register with a different ID.
Top-Level Screen	PROVISIONING FAILED	This failure could be due to bad password or a network issue.	Re-enter the password. If the error persists, contact your network administrator.

10.2 OTAR ERRORS/INFORMATION

WORKAROUNDS:

1. Zeroize.
2. Load proper KEK from the L3Harris Key Loader or Motorola KVL.

IF RADIO INDICATES:

1. INVALID KEYSTORE ZEROIZE NEEDED - This occurs if the radio's keys were loaded by the L3Harris Key Loader followed by an attempt to load UKEKs with the Key Loader or keys with the Motorola KVL.
 - Fix by performing workaround 1, followed by 2.
2. NO UKEK – Displayed during a zeroize performed from the radio or a zeroize initiated from the KMF.
 - Fix by performing workaround 2.
3. Zeroize Complete – KMF has zeroized the radio.
 - Fix by performing workaround 2.
4. Disabled OTAR Icon (red slash) – OTAR is disabled while in scan, talkaround, emergency, and monitor.
 - Fix by disabling these features. Icon will be corrected (no red slash).
5. Gray OTAR Icon (no red slash) – OTAR has not registered with tower (Conventional or Trunked system).
 - Fix by verifying proper frequencies.
 - If the radio is turned to the OTAR channel out of range of a conventional tower, and then comes in range after 3 minutes, fix by issuing an OTAR. Rekey, leaving and re-enter the OTAR channel.
6. Green OTAR Icon – OTAR is registered, all is well.
 - If update fails, verify you are in range of the tower and the KEK is correct.
7. Blue OTAR Icon – OTAR is attempting to rekey.
 - If rekey fails, verify you are in range of the tower and the KEK is correct.

11. TECHNICAL ASSISTANCE

The Technical Assistance Center's (TAC) resources are available to help with overall system operation, maintenance, upgrades and product support. TAC is the point of contact when answers are needed to technical questions.

Product specialists, with detailed knowledge of product operation, maintenance and repair provide technical support via a toll-free (in North America) telephone number. Support is also available through mail, fax and e-mail.

For more information about technical assistance services, contact your sales representative, or contact the Technical Assistance Center directly:

North America:	1-800-528-7711
International:	1-434-385-2400
Fax:	1-434-455-6712
E-mail:	PSPC_tac@l3harris.com

12. WARRANTY

Register this product within 10 days of purchase. Registration validates the warranty coverage and enables L3Harris to contact you in case of any safety notifications issued for this product.

Register on-line at the Customer Care center webpage:

<https://www.l3harris.com/all-capabilities/pspc-customer-care>

While on the webpage, review the applicable battery and/or product warranty literature.

APPENDIX A PREVENTIVE MAINTENANCE

To ensure high radio operating efficiency and to prevent mechanical and electrical failures, routine preventive maintenance should be performed at regular intervals. L3Harris recommends performing preventive maintenance on an annual basis, or more often in harsh environments. This maintenance should include, but not be limited to:

- Cleaning the radio and its accessories in accordance with the guidelines presented in Section 4.6.
- Inspecting the general condition and operation of the control knobs on the top of the radio. Inspection should include checking for any bent control shaft.
- Inspecting the radio's front display lens for proper operation and/or any cracks or other damage.
- Inspecting the radio's top display lens for proper operation and/or any cracks or other damage.
- Inspecting the radio's front panel keys for proper operation and/or any damage.
- Inspecting the radio's side panel buttons for proper operation and/or any damage.
- Inspecting the condition of the radio's front and rear panel microphones for proper operation.
- Inspecting the radio's Universal Device Connector (UDC) for any damage.
- Inspecting the radio's antenna connector for any damage.
- Inspecting the condition of the perimeter gasket around the radio's battery electrical contacts. Do **not** attempt to repair this gasket.
- Checking the condition of all batteries used with the radio. Refer to ECR-7367, which can be ordered by calling toll free 1-800-368-3277 (international 1-434-455-6403,) or can be found online at <https://premier.pspc.harris.com/infocenter/>.
- Checking the condition of the antenna used with the radio. If any significant damage is found, replace it with a new antenna. Do **not** attempt to repair a damaged antenna.
- Verifying overall radio operation by performing an operational check.



CAUTION

The XL Extreme Series portable radio, under warranty, **must** be serviced by a service center authorized by L3Harris to service immersion-rated radios. Service performed by any non-authorized service center and/or any non-authorized personnel voids the radio's warranty.



CAUTION

After any immersion, shake and dry off the XL Extreme Series portable radio to remove excess liquid, especially from the audio openings.



NOTE

If any damage is found which requires removal of the RF shield, return the radio to L3Harris for service. Contact the Technical Assistance Center for additional details. TAC contact information is included in Section 11.



NOTE

UL repairs require UL Repair facility certification, as defined in the UL file for the radio (<http://www.ul.com/>).

APPENDIX B WI-FI PROGRAMMING



Due to numerous issues with discovering and programming radios connected to Enterprise Wireless networks, it is **strongly** suggested that a single Access Point Wireless network be used for programming radios with RPM2. See Section B.7 for more information.



ISED restricts 5150-5250 MHz to indoor use only.



These instructions assume the user has a basic familiarity with Wireless (Wi-Fi) networks, their configuration, and how to connect devices. If you are unfamiliar with the terms and/or procedures mentioned in these instructions, please contact your IT department for help before attempting to configure Wi-Fi programming.



For radios to be discoverable on the Wi-Fi network, your wireless router must be configured to allow Multicast (mDNS). This varies by router manufacturer; refer to your router's documentation for specific settings needed to enable Multicast (mDNS).

B.1 OVERVIEW

Perform the following to program a radio over Wi-Fi. For first time setup, see Section B.8.1.

1. Configure the Access Point (Section B.2).
2. Configure the personality (Section B.3).
3. Configure the RPM2 application (Section B.4).
4. Put the radio in Wi-Fi Programming Mode (Section B.5).
5. Discovery and programming in the RPM2 application (Section B.6).
6. Support for Enterprise Wireless Networks (Section B.7).
7. Helpful Hints (Section B.8).

B.2 CONFIGURE THE ACCESS POINT

- Setup an Access Point (wireless router) as follows. The **bold** values provided below are the default values in the personality.
 - Wireless Networking Name (SSID): **harrisradios**
 - Shared Key (Network Password): **password**
 - Wireless Authentication/Security Mode (Encryption Type): **WPA**

WPA and **WPA2-PSK** are the available Encryption Types in the RPM2 application
- Ensure that the Access Point has Multicast (mDNS) enabled. See the second note at the top of Appendix B for more information.

B.3 CONFIGURE THE PERSONALITY

For a radio to be programmed over Wi-Fi, the active personality on the radio must be configured for connecting with the values that were set in Section B.2. The following steps detail how to configure an existing radio personality.

1. In the personality, navigate to **OPTIONS → Network Configuration**.

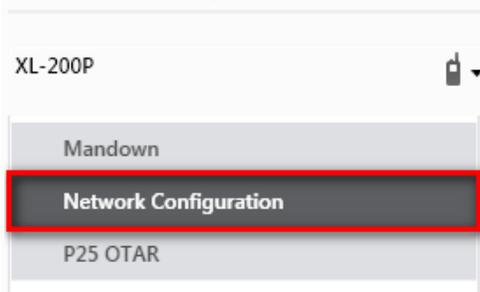


Figure B-1: Options → Network Configuration

2. Under the Wi-Fi Configuration section, set the Encryption Type, Network (SSID), and Network Password.



XL radios support up to 24 different Wi-Fi networks (SSIDs). These 24 Wi-Fi networks are considered radio administrator approved and Trusted Wi-Fi Networks (TWiN) on which the radios can operate.



Figure B-2: Wi-Fi Configuration

3. Under Network Service Configuration, the default values can remain the same. If the wireless network is managed by another department, please coordinate with them to get it setup correctly.

The **Network Discovery Configuration → Service Name** is a Unique name used by RPM2 and radios to communicate with each other. There is more information about this in Section B.8.2.

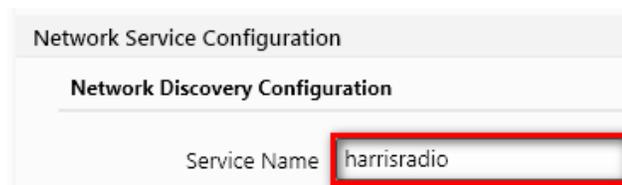


Figure B-3: Service Name

4. After the personality is configured and saved, write it to the radio over USB and then activate it.

B.4 CONFIGURE THE RPM2 APPLICATION

To ensure that RPM2 can discover radios over Wi-Fi, ensure that the **Enable Wi-Fi** checkbox is checked on the RPM2 Preferences screen as shown in **Error! Reference source not found..** This checkbox is unchecked by default.

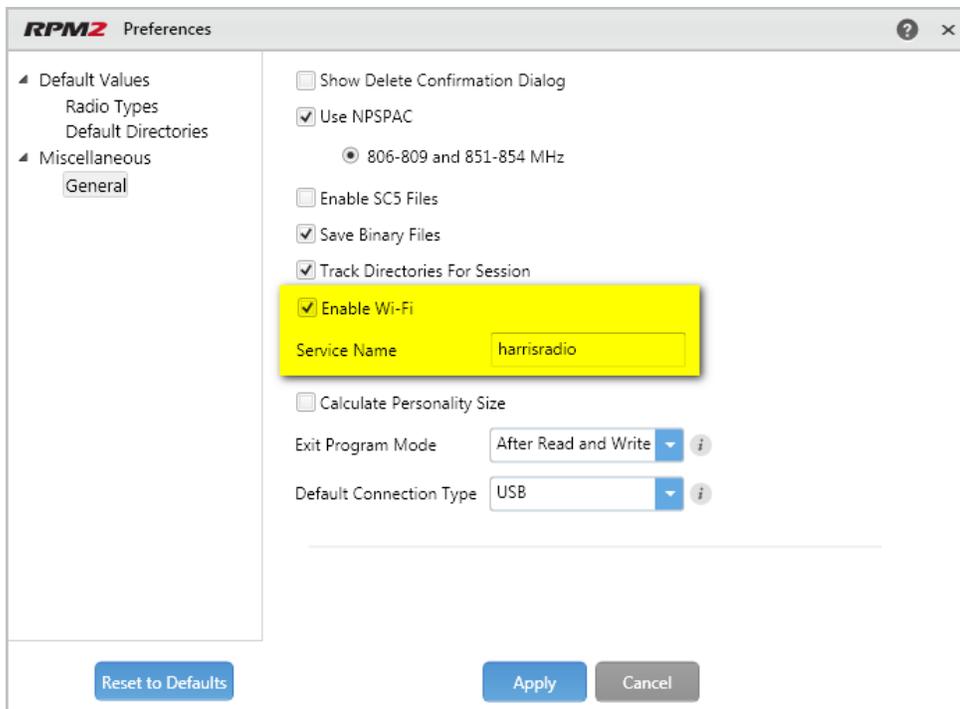


Figure B-4: Enable Wi-Fi in RPM2

Also, as shown in Figure B-4, the **Service Name** must be updated to reference the value in the active personalities for the radios you need to discover. See #3 in Section B.3 and Section B.8.2 for more information.

For default operation using the network as described in Section B.2, no other configuration of the radio or RPM2 is required.

B.5 PUT THE RADIO IN WI-FI PROGRAMMING MODE

To put the radio in Wi-Fi programming mode:

1. Turn the radio off and remove the USB cable (optional).
2. Press and hold the bottom portion of the PTT switch and either of the two side YELLOW buttons on power-up to enter WIFI Programming mode.
3. Release the buttons when the **WIFI INSTALL ACTIVE** screen appears on the radio.
4. Initially, the radio displays **DISCONNECTED**. When the IP address is displayed, the radio is available to be programmed.



Figure B-5: Enable Wi-Fi Programming Mode on Radio



NOTE

Refer to Section 5.37.2 for Wi-Fi Client selection information.

B.6 DISCOVERY AND PROGRAMMING IN THE RPM2 APPLICATION

1. Start RPM2.
2. Disconnect the radio from the programming cable.
3. Select the Radio tab  and click the Wi-Fi connection button .
4. When the Wi-Fi connection button is pressed, a “Discovering Wi-Fi Radios” message is displayed for several seconds and the radios connected to that access point with that Service Name populate the connection list.



NOTE

To connect over Wi-Fi, the currently active personality MUST have the correct Wi-Fi parameters. Therefore, care must be taken that all personalities on a given radio have the correct Wi-Fi parameters for the desired network. Otherwise, activation of another personality on the radio will result in the inability to establish a Wi-Fi connection.

5. Select a radio or radios and perform the desired action. Only Read Personality, Write Personality, and Load Code are supported over Wi-Fi. See the table below for the supported combinations.

Table B-1: Wi-Fi Feature Support

	SINGLE RADIO	MULTIPLE RADIOS (UP TO 16)
Read Single Personality	Yes	No
Read Multiple Personalities	Yes	No
Write Single Personality	Yes	Yes
Write Multiple Personalities	No	No
Load Single Code File	Yes	Yes
Load Multiple Code Files	Yes	Yes
Voice Annunciation	No	No
Feature Data	Yes	Yes
Radio Name	Yes	No
Install Splash Screen	Yes	Yes

6. In the Status Panel, all Wi-Fi related actions will have the prefix of “WIFI.”

To help in displaying the radios, the “Connection” and “IP Address” columns are sortable.



NOTE

If the Access Point is not configured to the default values from Section B.2 and the active personality in the radio is removed, the radio loses connection to the Access Point and must be connected over USB to write/activate a personality to reconnect to the Access Point.

B.7 RPM2 WI-FI SUPPORT FOR ENTERPRISE NETWORKS.

Enterprise Networks have certain limitations when it comes to Discovering/Programming Radios in RPM2. There is a 4500 second (75 minute) caching affect inherent to implementation with the Cisco® Wi-Fi solution that utilizes the Access Point (AP)/Wireless LAN Controller (WLC) components. Radios remain 'seen' in RPM2 even after the radio leaves Wi-Fi or is turned off. It is cached in RPM2 for 4500 seconds. This issue has only been observed with the Cisco AP and WLC solution; however, other enterprise wireless solutions may observe this caching effect. Operation with a lower tiered Wi-Fi router that does not operate with a WLC will likely not observe this behavior. Please see the Software Release Notes for Media Kit SK-019007-001 (14221-3100-8110) for more information.

B.8 HELPFUL HINTS

B.8.1 Initial Setup and Configuration

Since radio discovery is dependent on if Multicast (mDNS) messages are being received by RPM2, it is best to keep things as simple as possible. Here are the suggested steps if this is being setup and configured for the first time.

1. Configure the Access Point with the default personality values provided in Section B.2.
2. Create a basic personality with a single system, set and channel, write it to the radio and activate it over USB.
3. Complete Sections B.4 through B.6.

If the radio was not discovered in RPM2 but an IP address is displayed on the radio screen as seen in Figure B-5, this may mean that the Multicast (mDNS) messages are not making it through the Access Point. Consult the Access Point's manual and make sure that those messages are not being filtered out.

B.8.2 Grouping Radios by Service Name

One benefit of using a unique **Service Name** is that it allows the user to create logical groupings of radios to reduce the number of radios discovered in RPM2 and help reduce the overhead of keeping track of which radios have been configured.

For example, if there are 100 radios in Wi-Fi programming mode (see Section B.5) with the same **Service Name**, all 100 radios are displayed in the Radio tab after discovery has been completed. This makes it difficult to select and program multiple radios simultaneously. However, if the **Service Name** in the active personality on 16 of the radios are set to something unique like "fire1" and the RPM2 application **Service Name** (see Section B.4) is also updated to "fire1," only those radios with a **Service Name** of "fire1" are discovered and displayed in the Radio tab.

APPENDIX C SCBA BLUETOOTH CONFIGURATION




Refer to the vendor documentation for your SCBA for device-specific programming and configuration instructions.


This appendix provides radio configuration instructions to enable Bluetooth pairing with SCBA.

Refer to *RPM2 User's Manual 14221-1100-2060*, as necessary when performing the steps in this section.


1. Open RPM2.
2. Ensure a Radio Name is programmed.
 - a. Select the Radio Tab → Personality Tab.
 - b. Click the  button and enter the radio name. The radio name can be up to 16 characters long.

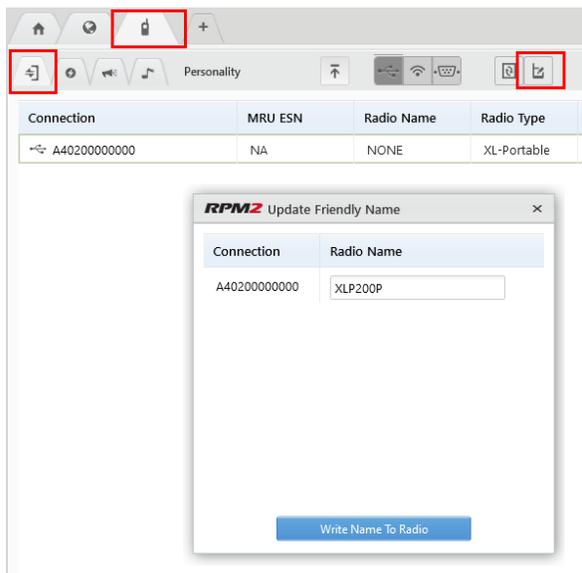

3. Select **Audio Settings** from the Personality Rail.
4. Under **Audio Menu Settings**, ensure **Speaker** is checked.

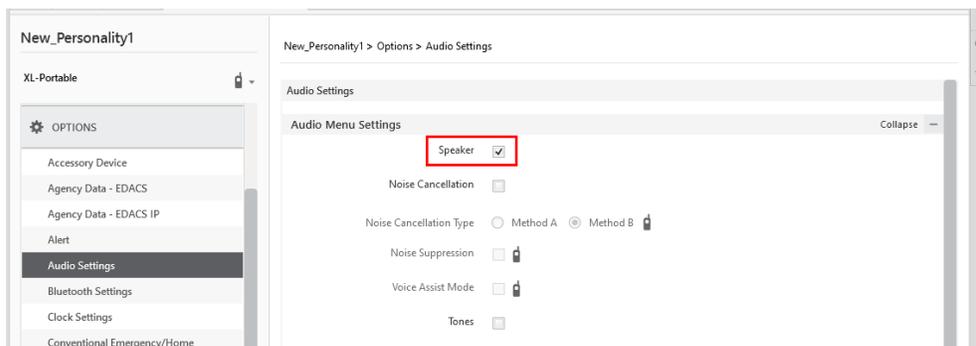

5. Under **OPTIONS** → **Audio Settings** → **PTT Options**, check **PTT** and select **Accessory Only**.

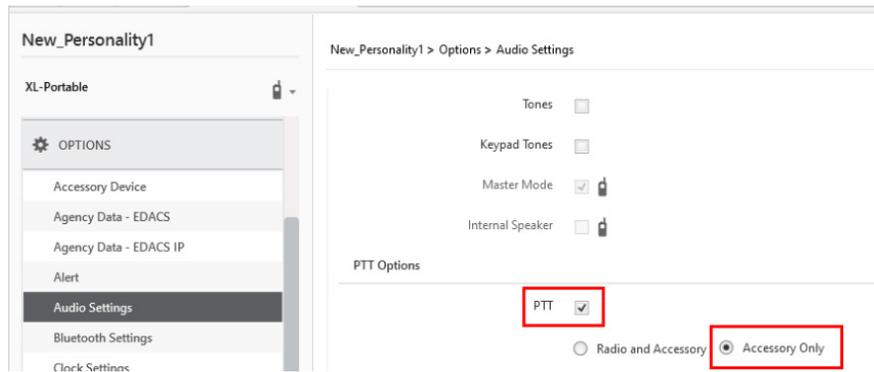


6. (Optional) Configure Automatic Level Control (ALC). Enabling ALC uses proprietary L3Harris algorithms to adjust and level audio to compensate for users who speak loudly or speak softly to be heard at nearly the same level.



NOTE

Requires RPM2 R6A or later and XLP R6A or later. Consult with your L3Harris radio technician before adjusting any of these settings.

- Select **OPTIONS** → **Audio Settings** → **Bluetooth Microphone**.
 - Check (enable) **ALC**.
 - Set **ALC Max Gain** to desired level (Default = 6 dB; Range = 0 dB to +12 dB in 1 dB increments). This setting allows the user to set the maximum gain applied by the ALC feature for transmitted voice. Higher gain settings increase the chance for acoustic feedback.
 - Set **Mic Gain** to desired level (Default = 16 dB; Range = -16 dB to +16 dB in 1 dB increments). This setting allows the user to set the Mic Gain for the Bluetooth External Microphone (baseline before ALC).
7. Select **OPTIONS** → **Bluetooth Settings** and check **Bluetooth Enabled**. Ensure **MITM Protection Required** is unchecked.

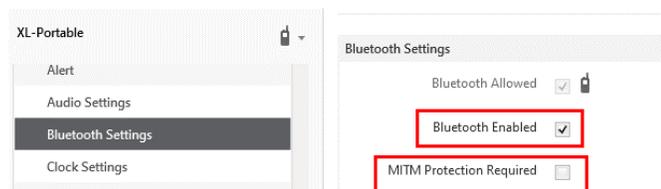

- Program a radio button or switch for Bluetooth Enable/Disable:
 - Select **OPTIONS** → **Portable Programmable Buttons or Programmable Switches**.
 - Select **Bluetooth Enable/Disable** from the drop-down of the desired button/switch.
- Write the personality to the radio.

APPENDIX D CONFIGURING ENCRYPTION

Refer to the following documentation for advanced programming and setup instructions:

- *OTAR Overview Manual* - MM-008069-001
- *Network Key Manager Installation and Configuration Manual* - MM-008070-001
- *UAS Key Management Application Manual* - MM-008068-001
- *Key Manager Key Admin Overview and Operation Manual* - MM1000019423
- *Key Manager Key Loader Overview and Operation Manual* - MM1000019424
- *Motorola® KVL User's Guide*

D.1 CREATE KEYS USING L3HARRIS KEY ADMIN

L3Harris Key Admin is part of the L3Harris Key Manager and is used by the Crypto Officer (CO). The CO creates a Master Set of keys from which a Distribution Set is produced. Using the Key Admin software, the CO can save keys into Distribution key files for technicians to use in radios.

1. Select **Start → Harris Key Manager → Harris Key Admin**.
2. Select **New Master Set, Open, or Import from Security Device**. Refer to the Key Admin online help for more information on creating keys.
3. When finished, create a Distribution Key File. A Distribution Key File is used with Key Loader to load key sets into the radio and cannot be edited. Refer to the Key Admin online help for more information on creating the Distribution Key File.

D.2 LOAD ENCRYPTION KEYS

D.2.1 Load UKEKS with Key Loader and RPM2 (for OTAR-Enabled Systems)

UKEKs are loaded into L3Harris OTAR-enabled radios using the Key Loader application. Key Loader is a part of Key Manager.

To load encryption keys:

1. Obtain the UKEK file and Storage Location Number (SLN) Binding Report information from the Crypto Officer (CO).




NOTE

Both AES and DES UKEKs can be contained within the same UKEK file.

2. If not already on, power-up the PC on which RPM2 and Key Loader are installed.
3. Connect the radio to the PC using the USB programming cable.
4. Load the UKEK file from the Crypto Officer onto the PC.
5. Run the RPM2 application and setup the radio's Personality according the SLN Binding Report information.
6. Setup the talk groups and the SLN mappings (Talk Group ID to SLN). This includes mapping SLNs to the "System" keys (PSTN, All Call, etc.).

7. In RPM2, select **P25 OPTIONS → P25 OTAR/Keystores** and set the following, referring to the RPM2 online help as necessary:
 - a. Click **Create** to add a Keystore or edit the Default Keystore.
 - b. Check **Enable OTAR Options**.
 - c. Enter the OTAR Message Number Period (MNP) as defined by the System Administrator.
 - d. Enter the radio's Individual RSI (from the SLN Bindings Report).
 - e. Enter the KMF's RSI (from the SLN Bindings Report).

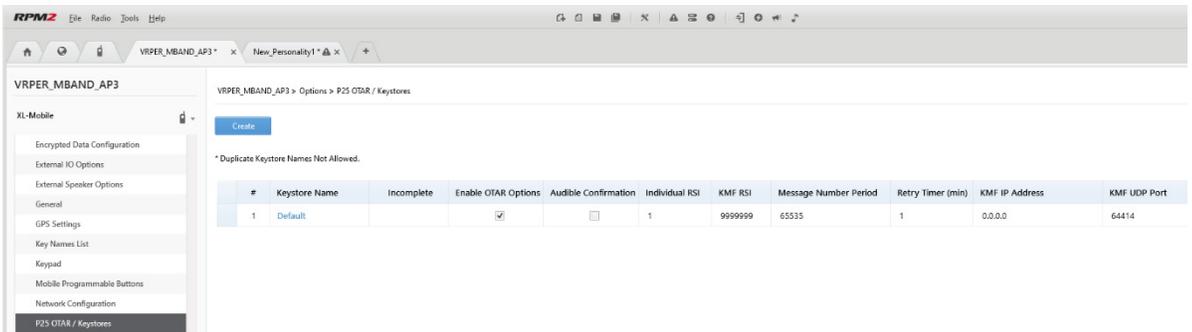

8. Program the Personality to the radio.
9. Run the Key Loader application.
10. Open the UKEK file loaded in step 4.
11. Select the Target Device type and click the **Load** button.
12. The Key Loader reads the target device's identifying information, retrieves a UKEK of the proper algorithm type from the UKEK file, and downloads the UKEK to the target device at the proper SLN and keyset with the proper key ID.
13. Click the button to exit the Key Loader application. New UKEKs are loaded and the radio is now ready to accept TEKs via OTAR with the trunked radio network.

D.2.2 Load Keys Using Key Loader

Key Loader is part of Key Manager and can be used by the Crypto Officer or Technician to load the keys into the radio.


Refer to the Key Loader online help if additional information is required when performing this procedure.

1. Connect the radio to the PC using the USB programming cable.
2. Power on the radio, if not already.
3. Select **Start → Harris Key Manager → Harris Key Loader**.
4. At the Key Loader Welcome screen, click **Next**.
5. Select **Load a Distribution Set into one or more devices**.
6. Click **Next**.
7. Browse to the Key File and enter the password.

8. Click **Next** to validate the password and continue. If the password is incorrect, the screen will display an error message.
9. Ensure USB is selected in the drop-down and click **Next**.
10. Select the radio from the drop-down and click **Load**.
11. Click **Finish**.

D.2.3 Load Keys with Motorola KVL

1. Connect the KVL cable to the UDC Connector.
2. The radio automatically goes into key fill mode.



3. Success and failure messages are shown on the KVL device's screen.
4. Disconnect the KVL cable. The XL portable will automatically exit keyload mode when the KVL is disconnected.


D.2.4 Link-Layer Authentication (LLA) Keyloading



LLA keyloading and ARC4 keyloading via a KVL-4000 or KVL-5000 requires XLP R16A or later.

In XLP R16A and later, LLA Keys (i.e., Radio Authentication Keys) can be loaded using a KVL-5000 or KVL-4000. The LLA feature must be enabled to utilize this feature.

1. Connect the radio to the KVL device using cable 12082-0400-A1.
2. Put the radio into KVL LLA Mode:
 - a. Press the Menu/Select button to access the main menu.
 - b. Press the left or right navigation buttons to display the SECURITY menu.
 - c. Press the up or down navigation buttons to highlight **KVL LLA** and press the Menu/Select button.



or

Press the button programmed for KVL LLA.

3. The Radio will indicate that KVL LLA Mode is active.



4. Once KVL LLA Mode is activated, the KVL-5000 can be used to provision the radio with LLA keys. The radio will remain in KVL LLA Mode until the user exits this state.

D.3 PROTECTED KEYS

The Protected Keys feature transfers P25 Voice Keys, from Key Loader to the radio, that have been wrapped (AES) or encrypted (DES) with Key Protection Keys (KPKs). KPKs are unprotected Key Encryption Keys (KEKs). The KPKs need to be loaded into the radio before the Protected Keys are loaded. Once loaded into the radio, the KPKs are used to unwrap (AES) or decrypt (DES) the Protected Keys.

The radio must be placed into the key loading mode (see Section D.2.2) to accept the KPKs and P25 Voice Keys.

About L3Harris Technologies

L3Harris Technologies is an agile global aerospace and defense technology innovator, delivering end-to-end solutions that meet customers' mission-critical needs. The company provides advanced defense and commercial technologies across air, land, sea, space and cyber domains.